


1 g & 4 CC to: OCC
1 CC to: FHR: JTR: WDM: HAM: (FILE)
NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

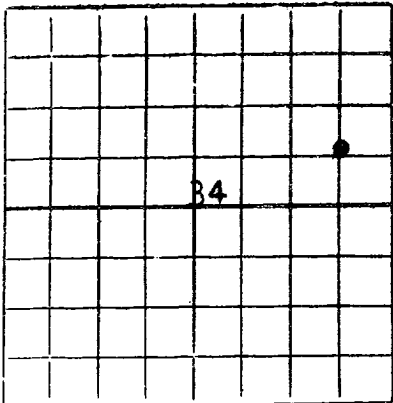

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

Sinclair Oil & Gas Company State 373
(Company or Operator) (Lease)
Well No. 1, in SE 1/4 of NE 1/4, of Sec. 34, T. 19 South, R. 37 East, NMPM.
Eumont Pool, Lea County.
Well is 660 feet from East line and 1980 feet from North line
of Section 34. If State Land the Oil and Gas Lease No. is State 373
Drilling Commenced 2:00 AM March 4, 1955 Drilling was Completed March 21, 1955
Name of Drilling Contractor D & D Drilling Company
Address Dallas, Texas
Elevation above sea level at Top of Tubing Head 3595 The information given is to be kept confidential until
, 19.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
10-3/4"	32.75#	N	323				
7"	20.00#	N	3799	Larkin		(3656-86; 3718-30; 3528-56; 3312-23; 3350-58; 3374-86;	
2-3/8"	4.70#	N	3733				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12-1/2"	10-3/4"	324	250	Halliburton		
8-3/4"	7"	3799	1200	Halliburton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

3-24-55 1000 gallons mud acid, 3656-3686; 3718-3730; by Cardinal. 3-25-55
3000 gallons 15% Reg. acid by Dowell; 3-27-55 Sand fraced w/4000 gallons oil
and 4000# sand by Halliburton; 4-7-55 acidized w/500 gallons mud acid 3528-
3556 by Dowell; 4-8-55 Sand oil fraced w/4000 gallons oil and 3000# sand from
3528-3556. 4-13-55 Washed w/500 gallons mud acid 3312-3386 by Dowell. 4-14-55
sand oil fraced w/4000 gallons oil and 3000# sand 3312-3386 by Halliburton.
Flushed w/45 barrels oil.

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL T. 8

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 3800 feet, and from feet to feet
 Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to Producing, 19

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was
 was oil; % was emulsion; % water; and % was sediment. A.P.I.
 Gravity

GAS WELL: The production during the first 24 hours was 450 M.C.F. plus barrels of
 liquid Hydrocarbon. Shut in Pressure 400 lbs.
 Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico				Northwestern New Mexico			
T. Anhy.	1375			T. Devonian			T. Ojo Alamo
T. Salt	1487			T. Silurian			T. Kirtland-Fruitland
B. Salt				T. Montoya			T. Farmington
T. Yates	2715			T. Simpson			T. Pictured Cliffs
T. 7 Rivers	2977			T. McKee			T. Menefee
T. Queen	3530			T. Ellenburger			T. Point Lookout
T. Penrose	3655			T. Gr. Wash			T. Mancos
T. Grayburg				T. Granite			T. Dakota
T. San Andres				T.			T. Morrison
T. Glorieta				T.			T. Penn
T. Drinkard				T.			T.
T. Tubbs				T.			T.
T. Abo				T.			T.
T. Penn				T.			T.
T. Miss				T.			T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	623	623	Red Beds				
623	1344	721	Red Beds and Anhydrite				
1344	1600	256	Anhydrite				
1600	1876	276	Anhydrite and Gyp				
1876	2160	284	Anhydrite				
2160	2380	220	Anhydrite, Salt & Gyp				
2380	2640	260	Salt & Gyp				
2640	2740	100	Salt and Anhydrite				
2740	2794	54	Anhydrite, Gyp & Sand				
2794	2883	89	Salt, Gyp and Lime				
2883	3001	118	Anhydrite & Gyp				
3001	3034	33	Gyp				
3034	3248	214	Gyp and Lime				
32 43	3310	62	Lime				
3310	3359	49	Gyp and Lime				
3359	3579	20	Lime				
3579	3612	33	Anhydrite, Gyp and Lime				
3612	3655	43	Lime				
3655	3682	27	Lime and Anhydrite				
3682	3724	42	Sand and Lime				
3724	3740	16	Lime				
3740	3775	35	Lime and Sand				
3775	3800	25	Lime				
3800			Total Depth				
3800	3797		Plugged Back				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

July 25, 1955
 Company or Operator Sinclair Oil & Gas Company Address 520 East Broadway, Hobbs, New Mex.
 Name District Superintendent Position or Title