


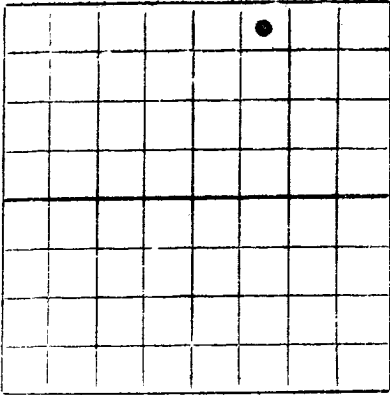

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

W. K. Byron J. W. Cooper C
(Company or Operator) (Lease)
Well No. 2, in NW 1/4 of NE 1/4, of Sec. 3, T. 20S, R. 37E, NMPM.
Monument Pool, Lea County
Well is 330 feet from North line and 1648 feet from East line
of Section 3-20S-37E. If State Land the Oil and Gas Lease No. is
Drilling Commenced 7-15-58, 19 Drilling was Completed 7-26, 19 58.
Name of Drilling Contractor Gackle Drilling Co.
Address Hobbs, N. M.
Elevation above sea level at Top of Tubing Head 3550 The information given is to be kept confidential until
, 19

OIL SANDS OR ZONES

No. 1, from 3798 to 3846 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet
No. 2, from to feet
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	24#	Used	326.35'	Coupling			Surface
5 1/2"	14#	New	3904'	Halliburton		3798-3846	Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	326.35'	200	BJ		
7-7/8"	5-1/2"	3904'	300	HOWCO		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Used 500 gallons acid, 10,000 refined oil and 10,000 lbs. sand.

Result of Production Stimulation Raised production from 9 to 43 bbls oil per 24 hr. day.

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 3904 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing July 29, 1958
OIL WELL: The production during the first 24 hours was 43 barrels of liquid of which 100% was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity 32
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy. 1318	T. Devonian	T. Ojo Alamo
T. Salt 1415	T. Silurian	T. Kirtland-Fruitland
B. Salt 2484	T. Montoya	T. Farmington
T. Yates 2612	T. Simpson	T. Pictured Cliffs
T. 7 Rivers 2862	T. McKee	T. Menefee
T. Queen 3528	T. Ellenburger	T. Point Lookout
T. Grayburg 3773	T. Gr. Wash	T. Mancos
T. San Andres	T. Granite	T. Dakota
T. Glorieta	T.	T. Morrison
T. Drinkard	T.	T. Penn
T. Tubbs	T.	T.
T. Abo	T.	T.
T. Penn	T.	T.
T. Miss	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	14	14	caliche				
14	880	866	red beds				
880	1012	132	water sand				
1012	1318	306	red beds				
1318	1415	97	andy.				
1415	2484	1069	salt				
2484	2696	212	anhy.				
2696	3425	729	lime & anhy.				
3425	3904	479	lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

7-30-58 (Date)
Company or Operator W. K. Byron Address 1000 N. Dal. Paso - Hobbs, N. M.
Name R. R. Anderson Position or Title Agent