

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

7/31/36

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico

Place

Date

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as

**Tide Water Oil Company L. Laughlin** Well No. **1** in **NW**

Company or Operator

Lease

Well No. **1** in **NW**

of Sec. **4**, T. **20**, R. **37**, N. M. P. M., **Monument** Field, **Lea** County.  
N.

The well is **660'** feet [N.] [~~S~~] of the **South** line and **1950'** feet[E.] [~~W~~] of the **West** line of **Section 4-20-37**

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

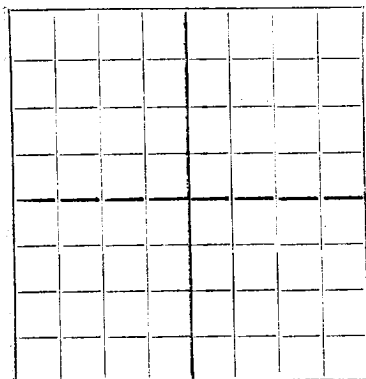
If state land the oil and gas lease is No. \_\_\_\_\_ Assignment No. \_\_\_\_\_

If patented land the owner is **L. Laughlin**

Address \_\_\_\_\_

If government land the permittee is \_\_\_\_\_

Address \_\_\_\_\_

The lessee is **Tide Water Oil Company**Address **Box 731, Tulsa, Okla**We propose to drill well with drilling equipment as follows: **Rotary**

AREA 640 ACRES  
LOCATE WELL CORRECTLY

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: **Tide Water Carries Blanket Bond of \$10,000 with US Fidelity and Guaranty Co. as Security**

We propose to use the following strings of casing and to land or cement them as indicated:

Size of Hole	Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented	Sacks Cement
17"	13" OD	45	New	225'	Cemented	250
12"	9-5/8" OD	36	New	1300'	Cemented	600
8-3/4"	7" OD	24	New	3825'	Cemented	225

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about **3875** feet.

Additional information: **13" OD casing will be set through surface water at about 225' and cemented to surface. 9-5/8" OD casing will be set at top of salt and 150% calculated cement used to cement to top. & 7" OD casing will be set at top of pay and 150% calculated cement used to cement to base of salt.**

Approved \_\_\_\_\_ 19\_\_\_\_  
except as follows:

Subject to special regulations for drilling and casing wells in this area

OIL CONSERVATION COMMISSION,

By \_\_\_\_\_

Title \_\_\_\_\_

Sincerely yours,

**Tide Water Oil Company**

Company or Operator

By **F. Schneider** - **S. E.**Position **Prod. Sup't**

Send communication regarding well to

Name **F. Schneider**Address **Drawer KK Hobbs, New Mexico**

17E

17E