


NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

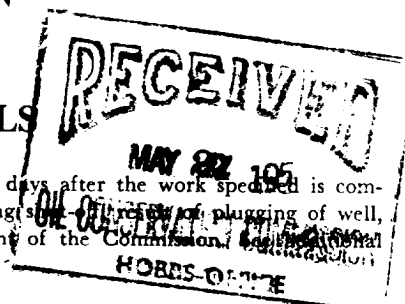

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing (shut-off), or results of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission, and in accordance with instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

May 27, 1953  
(Date)

Hobbs, New Mexico  
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Gulf Oil Corporation

(Company or Operator)

G. C. Matthews

(Lease)

Rife Drilling Company

(Contractor)

, Well No. 8 in the SW 1/4 SE 1/4 of Sec. 6

T. 20-S., R. 37-E., NMPM., Monument-Hlinebry Pool, Lea County.

The Dates of this work were as follows: May 22-23, 1953

Notice of intention to do the work (cross) (was not) submitted on Form C-102 on \_\_\_\_\_, 19\_\_\_\_,

(Cross out incorrect words)

and approval of the proposed plan (cross) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Ran 82 jts. & 1 nipple. 2633.80' of 8-5/8" OD 8 RT 28# H-40 SS Casing. Howco DV tool at 1090'. Set & Cemented at 2649' in two stages, 1st stage 100 sx 4% Gel & 100 Sx Neat Lone Star Bulk cement on bottom. Max. Press. 800#, 2nd stage thru Howco DV tool at 1090' w/330 sx 4% Gel, 100 sx Neat Lone Star Bulk Cement by Halliburton, Max Press 1500#. Circulated approx 200 sx cement.

After waiting over 30 hrs. tested 8-5/8" casing & BOP w/1000# for 30 min, no drop in pressure. Drilled plug in DV tool at 1090', tested DV tool w/1500# for 30 min, no drop in pressure. Drilled cement plug to 2649', tested cement below casing shoe w/800# for 30 min, no drop in pressure.

After approval of Mr. Yarbrough, State Oil and Gas Inspector, preparations were made to drill ahead.

Witnessed by J. F. Combs  
(Name)

Gulf Oil Corporation  
(Company)

Drilling Foreman  
(Title)

Approved:

OIL CONSERVATION COMMISSION

*Ray Yarbrough*  
(Signature)  
State Oil and Gas Inspector  
(Title)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name *R. C. Matthews*

Position Asst. Area Prod. Supt.

Representing Gulf Oil Corporation

Address Box 2167, Hobbs, New Mexico

MAY 22 1953  
(Date)