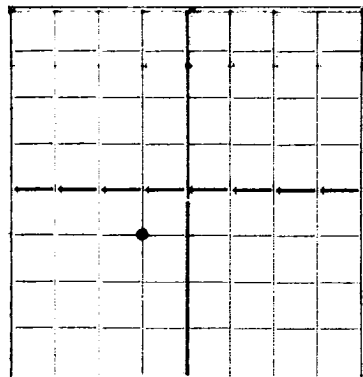


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Anderson-Prichard Oil Corporation Hobbs, New Mexico
Company or Operator Address
H.M. Britt A Well No. 2 in C NE 1/4 SW 1/4 of Sec. 6, T. 20S
Lease
R. 37E, N. M. P. M., Monument Field, Lea County.
Well is 3300 feet south of the North line and 3300 feet west of the East line of Sec 6-20S-37E
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is H.M. Britt Address _____
The Lessee is _____ Address _____
Drilling commenced 7-25 1936 Drilling was completed 11-4 1936
Name of drilling contractor Herschback Drilling Co. Address Dallas, Texas.
Elevation above sea level at top of casing 3571 feet.
The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 3750 to 3800 G No. 4, from _____ to _____
No. 2, from 3800 to 3905) No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet. _____
No. 2, from _____ to _____ feet. _____
No. 3, from _____ to _____ feet. _____
No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
<u>13"</u>	<u>40#</u>	<u>8</u>	<u>Ygstn</u>	<u>365'</u>	<u>none</u>			
<u>9-5/8"</u>	<u>40#</u>	<u>8</u>	<u>"</u>	<u>2445</u>	<u>Baker</u>			
<u>7"</u>	<u>24#</u>	<u>10</u>	<u>"</u>	<u>3724</u>	<u>HOWCO</u>			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>17"</u>	<u>13"</u>	<u>265</u>	<u>250</u>	<u>Halliburton</u>	<u>11# gal.</u>	<u>Circulated</u>
<u>12"</u>	<u>9-5/8"</u>	<u>2445</u>	<u>700</u>	<u>"</u>	<u>10# "</u>	<u>"</u>
<u>8 1/2"</u>	<u>7"</u>	<u>3724</u>	<u>200</u>	<u>"</u>	<u>11 1/2# "</u>	<u>"</u>

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		<u>Navalix</u>	<u>1000 gal</u>	<u>11-7-36</u>	<u>3829-05</u>	

Results of shooting or chemical treatment Increased Oil from 5 BOPN to 13 BOPN
Increased Gas from 100,000 CF to 2,000,000 CF.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3905 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing 11-7 3 1936
The production of the first 24 hours was 396 barrels of fluid of which 100 % was oil; 0 % emulsion; 0 % water; and 0 % sediment. Gravity, Ba 32
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

B.T. O'Neal Driller W.L. Payne Driller
T.M. Boice Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this _____

19____

Public

Hobbs, N.M. 6-11-37
Place Date
Name Frank Gray
Position Agent
Representing Anderson-Prichard
Company or Operator
Box 1697, Hobbs

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	36	36	Caliche and sand
36	215	179	Gravel and redbeds
215	227	12	Redbeds
227	265	38	Redbeds and shells
265	430	165	Gravel and redbeds
430	746	316	Redbeds
746	912	166	Redbeds and broken shells
912	1000	88	Redrock shells
1000	1076	76	Anhydrite
1076	1200	124	Broken anhydrite and salt
1200	1340	140	Salt and shells
1340	1530	190	Salt and anhydrite
1530	1651	121	Broken salt
1651	2200	549	Salt
2200	2261	61	Anhydrite
2261	2307	46	Broken anhydrite
2307	2393	86	Anhydrite
2393	2426	33	Anhydrite and broken lime
2426	2450	24	Anhydrite
2450	2511	61	Anhydrite and lime - show gas
2511	2522	11	Lime and gas
2522	2671	149	Lime
2671	2717	46	Broken lime
2717	3035	318	Lime
3035	3068	33	Broken lime
3068	3905	837	Lime
3905			TOTAL DEPTH