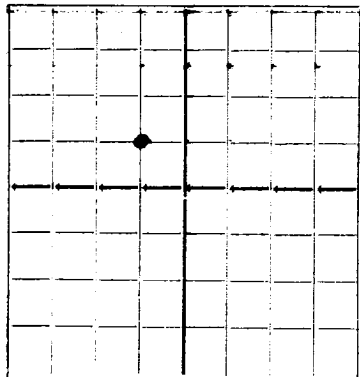


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Jeffers Oil Company Hobbs, New Mexico.
Company or Operator Address
H.M. Britt Well No. **1** in **C SE NW** of Sec. **7**, T. **20S**
Lease
R. 37E, N. M. P. M., **Monument** Field, **Lea** County.
 Well is **1980** feet south of the North line and **3300** feet west of the East line of **Sec 7-20S-37E**
 If State land the oil and gas lease is No. _____ Assignment No. _____
 If patented land the owner is _____ Address _____
 If Government land the permittee is **H.M. Britt** Address _____
 The Lessee is _____ Address _____
 Drilling commenced **6-11-35** Drilling was completed **11-12-35**
 Name of drilling contractor **Jeffers Oil Co** **Bert Fields Drilling Co.** Address **Okla. City, Okla**
Dallas, Texas
 Elevation above sea level at top of casing **3554** feet.
 The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from **3803** to **3881** No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **41** to **50** feet. **Sand**
 No. 2, from **60** to **65** feet. "
 No. 3, from **240** to **260** feet. "
 No. 4, from **685** to **720** feet. "

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
6-5/8"	20#	10	Ygstin	3803'	HOWCCo			
8 1/4"	32#	8	SHSmls	2622'	TP			
10"	40#	8	SHLap	1008'	TP			
12 1/2"	50#	8	do	601'	TP			
15 1/2"	70#	8	do	72'	none			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8"	6-5/8"	3803	160	HOWCCo	11#	Circulated
10"	8-5/8"	2622	500	"	11#	#
12"	10 1/4"	1008	546	"	11#	"
18"	16"	72'	15	Dumped	none	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **2625** feet to **3881'** feet, and from **3881** feet to _____ feet
 Cable tools were used from **0** feet to **2625** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **11-16** 19 **35**
 The production of the first **24** hours was **268** barrels of fluid of which **100** % was oil; _____ %
 emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

V.G. Tony Driller **A.C. Bradford** Driller
W.H. Parks Driller **T.O. Hoffman** Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this _____

day of _____, 19____

Notary Public

My Commission expires _____

Place

Date

Name

Position

Representing

Company or Operator

Address

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	41	41	Sand & Caliche
41	50	9	Gravel - HFW
50	60	10	Hard Sand
60	65	5	Gravel - More Water
65	195	130	Red Bed
195	220	25	Blue Shale
220	230	10	Sand - HFW
230	240	10	Blue Shale
240	260	20	Sand - More water
260	322	62	Redbeds
322	325	3	Gray Lime
325	685	360	Redbeds
685	720	35	Sand - 5 bailers water per hour
720	740	20	Sandy shale
740	750	10	Red rock
750	760	10	Red sandy shale
760	785	25	Sand - HFW
785	865	80	Red shale
865	870	5	Blue sandy shale
870	925	55	Red rock
925	928	3	Lime
928	970	42	Red rock
970	1010	40	Gray lime
1010	1035	25	Gray lime and anhydrite
1035	1095	60	Anhydrite - hard
1095	1105	10	Red rock
1105	1115	10	Anhydrite - hard
1115	1120	5	Salt
1120	1130	10	Salt and anhydrite
1130	1215	85	Salt and polyhalite
1215	1270	55	Sandy lime
1270	1278	8	Salt and polyhalite
1278	1295	17	Anhydrite
1295	1365	70	Salt and anhydrite
1365	1395	30	Anhydrite and polyhalite
1395	1405	10	Salt
1405	1640	235	Salt, anhydrite and polyhalite
1640	1680	40	Salt
1680	1695	15	Lime and polyhalite
1695	1790	95	Salt
1790	1800	10	Polyhalite
1800	1835	35	Salt
1835	1890	55	Salt and polyhalite
1890	1905	15	Salt
1905	1925	20	Blue shale and salt
1925	1945	20	Salt and polyhalite
1945	2000	55	Salt and anhydrite
2000	2060	60	Salt and polyhalite
2060	2095	35	Salt
2095	2115	20	Anhydrite
2115	2165	50	Salt and anhydrite
2165	2260	95	Salt
2260	2270	10	Anhydrite
2270	2440	170	Gray lime
2440	2465	25	Brown lime
2465	2480	15	Gray lime
2480	2490	10	Anhydrite
2490	2525	35	Gray lime
2525	2535	10	Sandy lime
2535	2570	35	Gray lime
2570	2590	20	Anhydrite and brown lime
2590	2610	20	Gray lime
2610	2612	2	Brown lime - show gas
2612	2617	5	Sandy lime
2617	2620	3	Brown lime
2620	2625	5	Gray lime
2625	2627	2	Brown lime
2627	2639	12	Anhydrite
2639	2690	51	Lime and anhydrite
2690	2704	14	Anhydrite
2704	2765	61	Brown lime and anhydrite
2765	2784	19	Brown lime
2784	2895	111	Lime and anhydrite
2895	2913	18	Anhydrite
2913	2933	20	Gray lime
2933	2997	64	Lime and anhydrite
2997	3015	18	Brown lime and anhydrite
3015	3114	99	Brown lime and anhydrite
3114	3136	22	Brown lime
3136	3153	17	Lime and anhydrite
3153	3196	43	Lime
3196	3225	29	Broken sandy lime
3225	3672	447	Brown lime
3672	3694	22	Gray and brown lime
3694	3717	23	Gray and white lime
3717	3762	45	Gray and brown lime
3762	3792	30	Gray lime
3792	3798	6	Brown lime
3798	3814	16	Gray and brown lime
3814	3825	11	Gray lime
3825	3881	56	Gray and brown lime - Total Depth