


N.

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

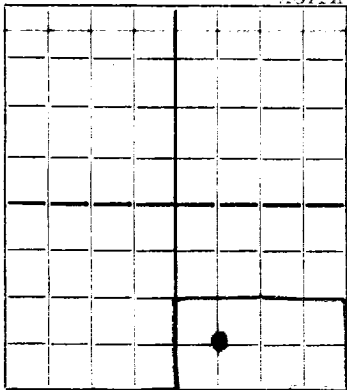

AREA 640 ACRES

LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation

Theo. Anderson

Company or Operator

Lease

Well No.

1

SW SE

of Sec.

8

T.

205

R. 872

N. M. P. M.

Monument

Field,

Lee

County.

Well is 680

feet south of the North line and 680

feet west of the East line of

SW SE

If State land the oil and gas lease is No.

Assignment No.

If patented land the owner is

Address

If Government land the permittee is

Address

The Lessee is

Gulf Oil Corporation

Address

Tulsa, Oklahoma

Drilling commenced

Nov. 4th, 1936

19

Drilling was completed

Nov. 26th

19 36

Name of drilling contractor

McQueen &amp; Livingston

Address

8008 North, Texas.

Elevation above sea level at top of casing

8347

feet.

The information given is to be kept confidential until

?

19

## OIL SANDS OR ZONES

No. 1, from

5770

to

5872

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

Rotary Hole

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-5/8	32.75	8	Lapw.	248				
7-5/8	22	8	Lapw.	2505				
5-1/2	17	10	Lapw.	5810				

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10-5/8	10-5/8	248	200	Halliburton		
9-7/8	7-5/8	2385	515	"		
8-3/4	5-1/2	5810	175	"		

## PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 5872 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

Cable toops were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

## PRODUCTION

Put to producing December 1st, 19 36

The production of the first 24 hours was 2,076 barrels of fluid of which \_\_\_\_\_ % was oil; \_\_\_\_\_ %

emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_

If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_

Rock pressure, lbs. per sq. in. \_\_\_\_\_

## EMPLOYEES

\_\_\_\_\_, Driller \_\_\_\_\_, Driller

\_\_\_\_\_, Driller \_\_\_\_\_, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 22nd

Tulsa, Oklahoma

Dec. 22nd, 1936

day of December, 19 36

Name

Position

General Superintendent

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	80'		Surface sand
	110		water sand
	190		sand and gravel
	249		red bed
	1050		red rock
	1158		anhydrite
	1152		salt
	1178		anhydrite
	1580		salt, anhydrite and shells
	1485		anhydrite and shells
	1485		anhydrite
	1568		salt and shells
	2000		salt, anhydrite, shells
	2120		anhydrite
	2210		salt and shells
	2240		anhydrite
	2285		salt
	2407		anhydrite
	2502		anhydrite and gyp
	2710		anhydrite
	2728		lime, sandy
	2738		sandy, silty, gas
	2764		sandy lime
	2822		lime
	2827		sandy lime
	2935		brown lime
	3175		lime
	3278		sandy lime
	3396		soft lime
	3584		hard lime
	3653		lime
	3796		hard lime
	3872		lime