


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

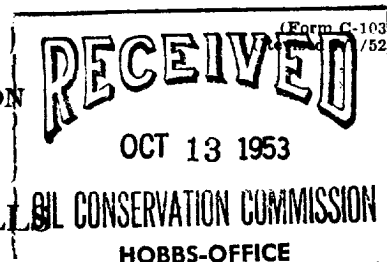

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

October 12, 1953

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Gulf Oil Corporation

(Company or Operator)

Bertie Whitmire

(Lease)

Rife Drilling Co.

(Contractor)

, Well No. 6 in the NW 1/4 NE 1/4 of Sec. 8

T. 20-S, R. 37-E, NMPM, Monument-Elinsbry Pool, Lea County.

The Dates of this work were as follows: October 9-12, 1953

Notice of intention to do the work (~~was~~) (was not) submitted on Form C-102 on _____, 19____, (Cross out incorrect words)

and approval of the proposed plan (~~was~~) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Ran 85 jts & 1 nipple 2885' of 9-5/8" 8 RT 36# J-55 SS casing w/Howco guide shoe & 1 Baker float collar, 3 Weatherford centralizers & 12 Weatherford scratchers 2900' to 2750', Set & cemented at 2900' w/1700 sacks Lone Star cement. 1600 sacks 4% Gel. Reg. Heat & 180 sacks Reg. Heat cement on bottom. Plug pumped to 2836'. Max. Press. 800#. Circ. approx. 400 sacks. BY Halliburton.

After waiting over 36 hrs., tested 9-5/8" casing w/1000# for 30 min, no drop in pressure. Drilled cement from 2836' to 2900', tested cement below casing shoe w/800# for 30 min, no drop in pressure.

Witnessed by Glenn Stach

(Name)

Gulf Oil Corporation

(Company)

Drilling Foreman

(Title)

Approved:

OIL CONSERVATION COMMISSION

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name

Position

Representing

Address

Engineer District 1

(Title)

OCT 14 1953

(Date)

Gulf Oil Corporation

Box 2167, Hobbs, New Mexico