

[illegible]


Orig: & Acc: OCC
cc: VDA
JTR
ECC
HAM
PAD
F

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-10 is sent later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

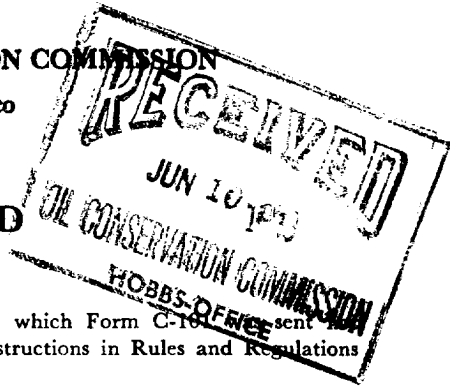

AREA 640 ACRES
LOCATE WELL CORRECTLY

Sinclair Oil & Gas Company

(Company or Operator)

B. J. Barber

(Lease)

Well No. 8, in NW ¼ of NW ¼, of Sec. 8, T. 20 S, R. 37 E, NMPM.

Monument (Elinebry)

..Pool,

Lea

County.

Well is 330 feet from North line and 330 feet from West line

of Section 8-203-37E..... If State Land the Oil and Gas Lease No. is.....

Drilling Commenced.....3-25-53....., 19..... Drilling was Completed.....5-4-53....., 19.....

Name of Drilling Contractor..... **Gackle Drilling Company**

Address.....Hobbs, New Mexico.....

Elevation above sea level at Top of Tubing Head.....**3557**..... The information given is to be kept confidential until

....., 19.....

OIL SANDS OR ZONES

No. 1, from 5140 to 5190 No. 4, from _____ to _____

No. 2, from 5638 to 5700 No. 5, from _____ to _____

No. 3, from.....to..... No. 6, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.

No. 2, from.....to.....feet.

No. 3, from.....to.....feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8	48	N	1016	Larkin			
8 5/8	32, 24	N	2900	"			
5 1/2	20, 14	N	5700	"		5655 to 5696	Oil
2	4.7	N	5680				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2	13 3/8	1019	1000	Halliburton		
11	8 5/8	2900	700	"		
7 7/8	5 1/2	5700	400	"		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Acidized with 500 Gal. of Mud Acid

Result of Production Stimulation Flowed after acid treatment of 500 Gal. 726 Bbl. oil in 12 hours

...Depth Cleaned Out..5697..

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 5700 feet, and from _____ feet to _____ feet.
Cable tools were used from None feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing May 13, 1953

OIL WELL: The production during the first 12 hours was 726 barrels of liquid of which 100 % was
was oil; _____ % was emulsion; _____ % water; and _____ % was sediment. A.P.I.
Gravity 39

GAS WELL: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of
liquid Hydrocarbon. Shut in Pressure _____ lbs.

Length of Time Shut in _____

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.....	T. Devonian.....	T. Ojo Alamo.....
T. Salt..... <u>1184</u>	T. Silurian.....	T. Kirtland-Fruitland.....
B. Salt..... <u>2180</u>	T. Montoya.....	T. Farmington.....
T. Yates..... <u>2335</u>	T. Simpson.....	T. Pictured Cliffs.....
T. 7 Rivers.....	T. McKee.....	T. Menefee.....
T. Queen..... <u>3150</u>	T. Ellenburger.....	T. Point Lookout.....
T. Grayburg.....	T. Gr. Wash.....	T. Mancos.....
T. San Andres..... <u>3640</u>	T. Granite.....	T. Dakota.....
T. Glorieta..... <u>5062</u>	T.	T. Morrison.....
T. Broken line <u>5638</u>	T.	T. Penn.....
T. Tubbs.....	T.	T.
T. Abo.....	T.	T.
T. Penn.....	T.	T.
T. Miss.....	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	94	94	Sand & Caliche				
94	1002	908	Redbed				
1002	1031	29	Redrock & Anhydrite				
1031	1184	153	Anhydrite				
1184	1579	395	Anhydrite, salt & shells				
1579	1878	299	Salt				
1878	2190	312	Anhydrite & Salt				
2190	2244	54	Anhydrite				
2244	2286	42	Anhydrite & Gyp				
2286	2347	61	Anhydrite & lime				
2347	2758	411	Lime & Gyp				
2758	2800	42	Anhydrite, Lime & Sand				
2800	3230	430	Lime				
3230	3638	408	Lime & Sand				
3638	4647	1009	Lime				
4647	4765	118	Broken lime				
4765	5700	935	Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

_____ June 9, 1953 _____ (Date)
Company or Operator Sinclair Oil & Gas Company Address Box 1927 Hobbs, N.M.
Name C. C. Salter Position or Title Dist. Supt.