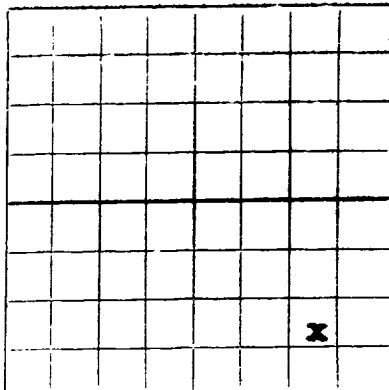


AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Stanolind Oil and Gas Company
(Company or Operator)W. S. Capps SE/3
(Lease)

Well No. 27, in SE 1/4 of SE 1/4, of Sec. 3, T. 19-S, R. 38-E, NMPM.

Hobbs Pool, Lea County.

Well is 760 feet from South line and 990 feet from East line

of Section 3. If State Land the Oil and Gas Lease No. is

Drilling Commenced May 6, 1955, 19 Drilling was Completed June 21, 1955

Name of Drilling Contractor B. L. McFarland

Address West Wall Street - Odessa, Texas

Elevation above sea level at Top of Tubing Head 3615 R.D. The information given is to be kept confidential until

Not Confidential, 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	24#	New	294'	Float			
5-1/2"	14#	New	4267'	Float			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8	308'	240	Howco Plug		
7-7/8	5-1/2	4280'	670	Howco Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Acidized with 1000 gallons 15% regular

Sand-oil fraced with 12,600 gallons

Result of Production Stimulation (See reverse side)

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 4280 feet, and from feet to feet.
 Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 6-20, 19 55
 OIL WELL: The production during the first 24 hours was 15 barrels of liquid of which 100 % was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity 34° API
 GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
 Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Devonian	T. Ojo Alamo	
T. Salt	T. Silurian	T. Kirtland-Fruitland	
B. Salt	T. Montoya	T. Farmington	
T. Yates	T. Simpson	T. Pictured Cliffs	
T. 7 Rivers	T. McKee	T. Menefec	
T. Queen	T. Ellenburger	T. Point Lookout	
T. Grayburg	T. Gr. Wash	T. Mancos	
T. San Andres 4200	T. Granite	T. Dakota	
T. Glorieta	T.	T. Morrison	
T. Drinkard	T.	T. Penn	
T. Tubbs	T.	T.	
T. Abo	T.	T.	
T. Penn	T.	T.	
T. Miss	T.	T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	130		Caliche				
130	901		Red Bed				
901	1455		ANHY & Red Bed				
1455	1645		Red Bed & Shells				
1645	1784		ANHY Shale & Sand				
1784	2094		ANHY Sand & Salt				
2094	2796		ANHY & Salt				
2796	3008		ANHY				
3008	3082		ANHY & Gyp				
3082	3537		ANHY				
3537	3822		ANHY & Lime				
3822	4280		Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

June 28, 1955 (Date)
 Company or Operator Stanolind Oil & Gas Co. Address Box 68 - Hobbs, New Mexico
 Original Signed by Name RALPH L. HENDRICKSON Position or Title Field Superintendent