

NEW MEXICO STATE LAND OFFICE

Santa Fe, New Mexico


DEPARTMENT OF THE STATE GEOLOGIST

NOTICE OF INTENTION TO DRILL NEW WELL

Notice must be given to the State Geologist or to the proper Oil and Gas Inspector and approval obtained before drilling begins. If changes in the proposed plan are considered advisable a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval.

Mr. B. L. Halley, State Geologist. Denver, Colo. ~~Albuquerque~~, 12-11-30 1934

Dear Sir: You are hereby notified that it is our intention to commence the drilling of a well to be known as State Well No. 11 in SW of Sec. 5 T. 19 S, R. 38 E, N. M. P. M., Hobbs Oil Field Lea County

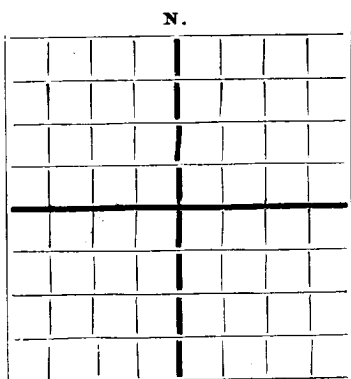

AREA 640 ACRES
LOCATE WELL CORRECTLY

The well is 660 feet ~~(N.)~~ (S.) of North line and 660 feet ~~(E.)~~ (W.)

of East line of SW of Section 5
(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. 1-1212

Assignment No. _____

If patented land the owner is _____

Address _____

The lessee is _____ Address _____

The elevation of the derrick floor above sea level is _____ feet. We propose to drill well with No. _____

Make of Drill _____

We propose to use the following strings of casing and to land or cement them as indicated.

Size of Casing	Weight Per Foot	New or Second Hand	Depth	Landed or Cemented
16"	70#	New Conductor	200'	Set and Cement
10-3/4"	45.50	New Seamless	2800'	Cement back thru S.Beds
6-5/8"	26#	" "	4000'	Cement W/ 100 Sacks

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 4150 feet.

Additional information: Will drill well with the intention of encountering commercial oil production at approximately 4150'. Will spud by cable tool method, setting and cementing approximately 200' 16" 70# new conductor. After setting conductor will complete well by Rotary method, setting 10-3/4" casing in the lime at approximately 2800', cementing back thru the Salt Beds and setting the 6-5/8" at approximately 4000' and cementing this string with 100 sacks. All work to be done in accordance with best field practice and conforming to the oil and gas regulations of the State of New Mexico.

Approved Feb 1st, 1934

Except as follows:

Sincerely yours,
The Midwest Refining Company
Company or Operator.

By G. H. Jaques
Position Vice President--Operations

Send communication regarding well to

Name G. H. Jaques, Denver, 1 approved copy

Address C. G. Scott, Hobbs, N.M. 1 approved copy

State Geologist or Oil and Gas Inspector.

James P. Sullivan