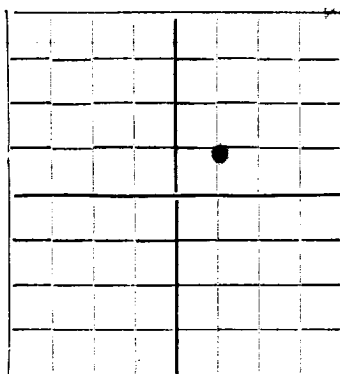


NEW MEXICO OIL CONSERVATION COMMISSION

JUN 14 1937

AREA 640 ACRES
LOCATE WELL CORRECTLY

Santa Fe, New Mexico

bed bed and used
bed bedallens and eland
estirbydaestirbyda
jia2

estirbyda and and

Mail to Oil Conservation Commission, Santa Fe, New Mexico. State proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

DUPLICATE

JUN 14 1937

Gulf Oil Corporation

Tulsa, Oklahoma

Company or Operator

Address

Lease

Well No. 2 in SW NE of Sec. 15, T. 20S

R. 36E, N. M. P. M., Monument 3 Field, Lea County.

Well is 1900 feet south of the North line and 1900 feet west of the East line of SW NE

If State land the oil and gas lease is No. 8-244 Assignment No.

If patented land the owner is Address

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma

Drilling commenced 4-8-37 19 37 Drilling was completed 5-14-37 19 37

Name of drilling contractor McQueen & Cleverger Address Ft. Worth, Texas

Elevation above sea level at top of casing 3553 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3520' to 3678' No. 4, from to

No. 2, from Pay 3778' No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary Hole to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
10-5/4	32.75	8	Lapw.	236'				
7-5/8	26.4	8	Lapw.	2427'				
5-1/2	17	10	* *	3764'				
* * Bottom 65 Jts. Lapw., Top 71 Seamless								

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10-5/4	10-5/4	236'	175	Halliburton	300# of Calcium Chloride.	
9-7/8	7-5/8	2427'	400	"		
8-3/4	5-1/2	3764'	175	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	Hydrochloric Acid		2,000	5-8-37	3378'	
	Hydrochloric Acid		3,000	5-11-37	3378'	

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3378' feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing May 16, 1937, 19 37

The production of the first 24 hours was 250 barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

I, Driller, Driller

, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 10th Tulsa, Oklahoma June 10, 1937

day of June, 19 37 Name J. J. Sanders

Notary Public. Position General Superintendent

Representing Gulf Oil Corp.

My Commission expires March 11, 1938

FORMATION RECORD

[illegible]