


N.

NEW MEXICO OIL CONSERVATION COMMISSION


Santa Fe, New Mexico

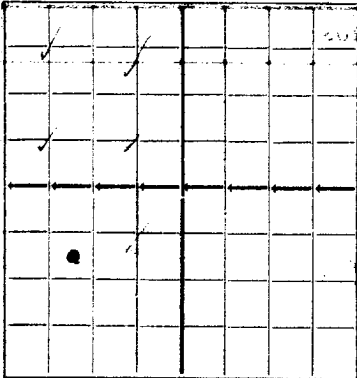

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

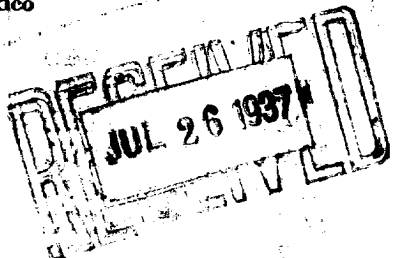

REPOLLO OIL COMPANY

Hobbs, New Mexico

Company or Operator
Wm. P. Byrd Well No. **6** in **N/2SW/4** of Sec. **11**, T. **20S**
Lease
R. **36E** N. M. P. M. **Monument** Lea **East** **West** County.
Well is **990** feet **North** **South** of the **###** line and **990** feet **###** of the **###** line of **N/2SW/4**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **Wm. P. Byrd** Address **Seminole, Texas**
If Government land the permittee is Address
The Lessee is Address
Drilling commenced **June 17** 19 **37** Drilling was completed **July 21** 19 **37**
Name of drilling contractor **M. J. Delaney Co.,** Address **Dallas, Texas**
Elevation above sea level at top of casing **3589** feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from **3778** to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
12 1/2"	45	8		230	none			
9 5/8	45	8		1186	Float			
7" OD	24	10		3765	Float			
2" Reg. Tbg.				3848				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15 1/2"	12 1/2"	249	300	Halliburton		
11 1/2"	9 5/8	1201	400	Do		
8 1/2"	7" OD	3776	300	Do		
	2"	3856	Reg. Tubing			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		none				

Results of shooting or chemical treatment

DUPLICATE

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **3894** feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **7/22/37** 19
The production of the first **24** hours was **308** barrels of fluid of which **100**% was oil; %
emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

D.E. Spoonts, Driller **G.A. Bourg**, Driller
W.E. Smith, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **26** day of **July** 19 **37**
Patricia Mahoney Notary Public
My Commission expires **10-24-39**
Hobbs, N. Mex. **July 24, 1937**
Name **H. Lured**
Position **Dist. Supt.**
Representing **Repollo Oil Company** Company or Operator
Address **Hobbs, N.M.**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	245	245	Sand, Clay & Gravel
245	1049	804	Red Bed & Red Rock
1049	1191	142	Red Rock & Anhydrite
1191	1290	99	Anhydrite
1290	1420	130	Anhydrite & Salt
1420	2373	953	Anhydrite, Salt & Potash
2373	2420	47	Salt
2420	2729	309	Anhydrite
2729	2814	85	Anhydrite & Lime
2814	2917	103	Anhydrite
2917	3694	977	Lime

DUPLICATE