

C. W. TRAINER

P. O. BOX 1100

PHONE EX 7-1518

205 NORTH LINAM STREET

HOBBS, NEW MEXICO 88240

KATIE LEE NO. 1

ATTACHMENT TO FORM C-103

Drilled 7 7/8" hole to TD 10,985'. Ran 347 jts. 5 1/2" Class B 17# and 20# casing and cemented at 10,969'. Used 500 sax Incor - 4% gel, 12 1/2% Gilsonite, 8 1/2% salt. Plug down 10:20 PM 5-19-64. WOC 106 hours. Temperature Survey indicated top of cement at 7400'. Tested plug, casing and head with 3000 psi. Held OK.


Perforated 10,731'-10,736' with 20 jets for production tests. Acidized with 1000 gallons 10% Acetic Acid. Maximum pressure 5300 psi. Swabbed 36 bbls. new water in 5 hours. Squeezed with 50 sax Slo Set cement with packer at 10,510'. Maximum pressure 4200 psi. Displaced water with oil and WOC an additional 12 hours with 3800 psi on casing. Held OK.

Perforated 9,676'-9,681' with 20 jet shots. Acidized with 500 gallons 15% regular with 20# FLAX2 at 1/4 BPM. 200 psi maximum pressure. Swabbed 15 BO + 147 BW in 21 hours after recovering load.

Perforated 10,369'-10,403' with 10 holes and treated with 1250 gallons 15% regular. Swabbed dry.

Perforated 9,702'-9,705' with 5 holes and 9,721'-9,725' with 5 holes. Treated with 750 gallons 15% acid. Swabbed 55 BW and 1 BO in 3 hours.

Prep to P&A.

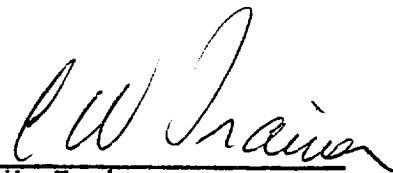

---

C. W. Trainer

Owner - Operator