

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
811 South First, Artesia, NM 87210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised March 25, 1999

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

WELL API NO.
30-025-22191
5. Indicate Type of Lease
STATE ☐ FEE ☒
6. State Oil & Gas Lease No.
17383

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other	7. Lease Name or Unit Agreement Name: Mallard Alves
2. Name of Operator Nadel and Gussman Permian, L.L.C.	8. Well No. 1
3. Address of Operator 601 N Marienfeld, Suite 508, Midland, Texas 79701	9. Pool name or Wildcat North Osudo Morrow
4. Well Location Unit Letter P : 660 feet from the South line and 990 feet from the East line Section 6 Township 20S Range 36E NMPM County	
10. Elevation (Show whether DR, RKB, RT, GR, etc.) 3635 GR	

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐
OTHER: ☐


SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐
CASING TEST AND CEMENT JOB ☐
OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

1. Notify NM<OCD District in Hobbs 24 hrs before rigging up on well.
2. Circulate well w/ 9.5 ppg gelled fluid.
3. Spot and tag a 150' plug across the 9-5/8" csg shoe at 5300'-5150' -TAG
4. Spot a 100' plug from 3200-3100' (base of salt)
5. Spot a 100' plug from 1840'-1740' (top of salt)
6. Spot and tag a 100' cmt plug across the surface shoe from 500-400'. -TAG
7. Spot a 10' surface plug.
8. Cut off wellhead
9. Erect standard 6' dry hole marker, remove all surface equipment, deadmen, clean, level and reseed location

→ 100' PLUG F/7975-7875'



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE K. E. McCready TITLE Operations Engineer DATE 1/2/03

Type or print name K. E. McCready Telephone No. _____
(This space for State use)

APPROVED BY _____ DATE JAN 07 2003
GARY W. WINK
GE FIELD REPRESENTATIVE / STAFF MANAGER

Conditions of approval, if any:


THE COMMISSIONER MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF THE OPERATION AND TO THE COMPLETION OF THE OPERATION.

DEL AND GUSSMAN PERMIAN

Mallard Alves #1
660' FSL, 990' FEL, Unit P, Sec 6, 20S, 36E, Lea County, NM
API # 30 - 025 - 22191

Elev: 3635', KB = 3650'

PROPOSED PLUG and ABANDON

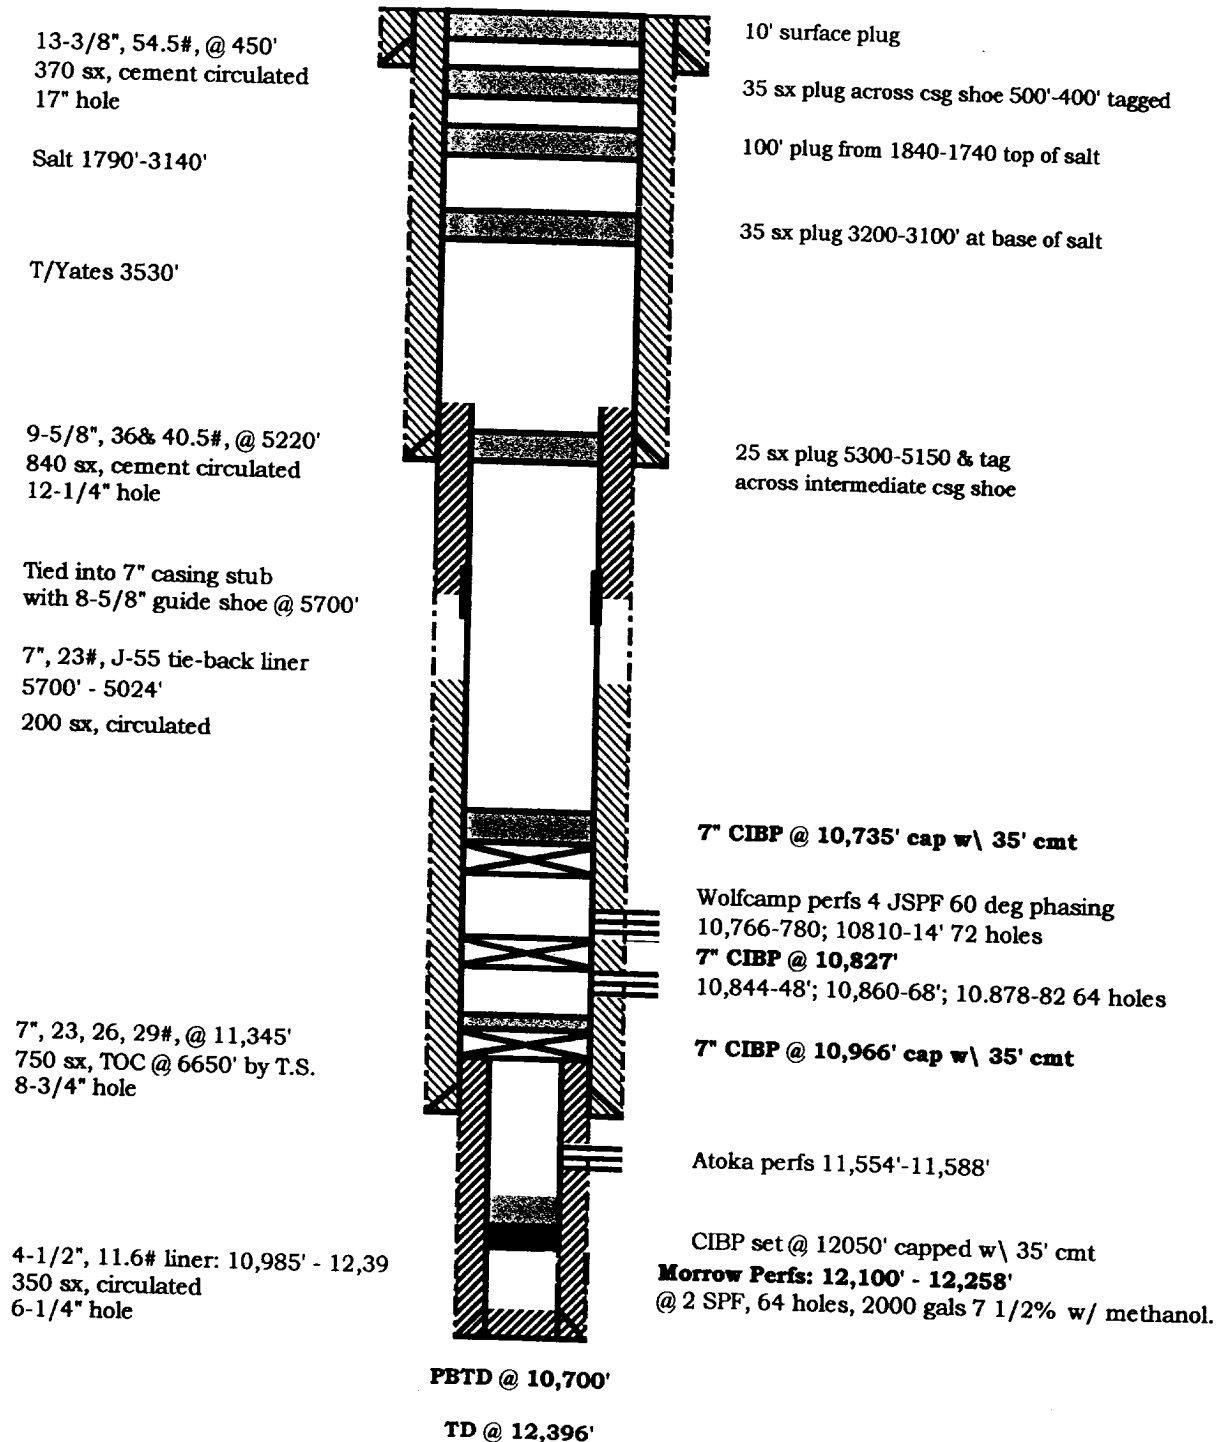

D&C by Mallard Petroleum - October, 1967. P&A- 8-19-76. Rentered and completd by J&G Enterprises, October , 1995.

KEM

1/2/03