


CONTINENTAL OIL COMPANY
Blow-out Preventer Specifications

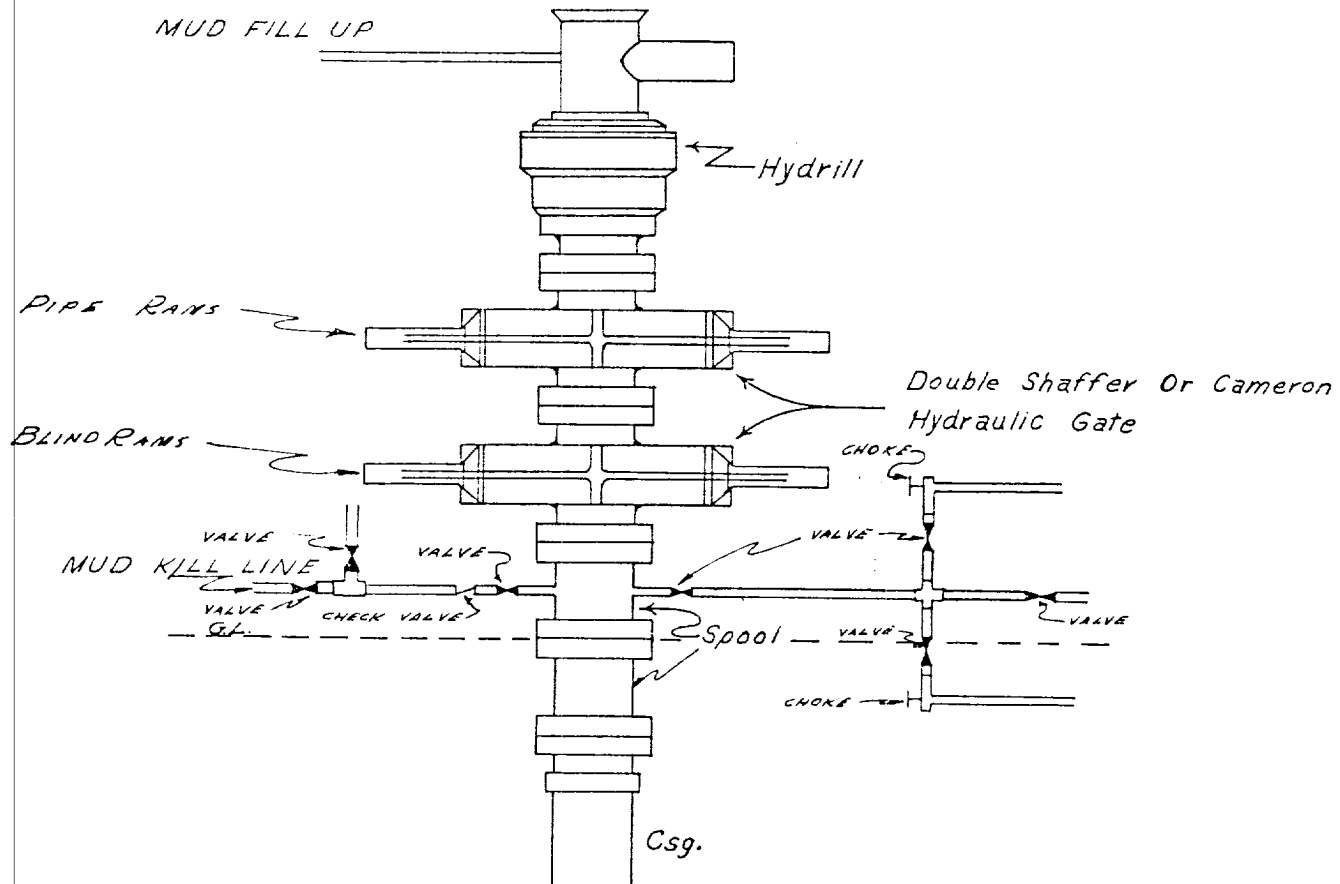

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.
Remote controls on rig floor.

**DUE TO SUBSTRUCTURE CLEARANCE,
HYDRILL MAY OR MAY NOT BE USED.**

State KN-12 NO. 4

RECEIVED

JUL 14 1978

CHL COMMISSION COMM.
ALBANY, N. Y.

113

113