

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPL
(Other instructions
reverse side)

FE-
re-

Form approved.
Budget Bureau No. 42-R1424
5. LEASE DESIGNATION AND SERIAL NO.

NO NM-14504
6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Ike Lovelady, Inc.

3. ADDRESS OF OPERATOR

P.O. Drawer 2666; Midland, Texas 79702

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)
At surface

1980' FSL & 660' FWL of Sec.31
7 miles southwest of Hobbs, New Mexico.

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3595.9 GR.

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Shearn Federal

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Wildcat

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec.31,T-19-S,R-38-E

12. COUNTY OR PARISH

Lea

13. STATE

New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING

ABANDONMENT*

(Other)


Side track hole

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

1/28/82 Unable to fish drill collars & bit. Left 14 DC's and bit in hole, top of collars at 5566', Bit @ 5993'. Spotted 120 Sks cement @ 5566 to side track hole.
1/29/82 Kick off W/Dyna-Drill @ 5310' & drill to 5379. Lay down Dyna-Drill & RIH W/7-7/8" Bit. (Dev.3-1/2° @ 5349'.
2/8/82 Drilling in side tracked hole @ 5727'. 3° Dev., Mud weight 9.9#, Vis 47, WL 7.6 CC.

NOTE: Partial Lost Circulation in sidetracked hole 5750' - 5800' W/9.9# 31 Sec. Vis. Mud. No fluid loss after mud up.

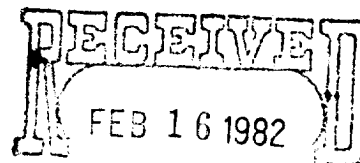

OIL & GAS
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

R. ROGER CHAPMAN

TITLE Manager of Operations DATE 2/8/82

(This space for Federal or State office use)

FEB 19 1982

APPROVED BY
CONDITIONS OF

APPROVAL, IF ANY:

U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

TITLE

DATE

*See Instructions on Reverse Side