




ID	DESCRIPTION	PRESSURE		TIME		TYPE
		REPORTED	CALCULATED	REPORTED	CALCULATED	
A	INITIAL HYDROSTATIC	7632	7681.3			
B	INITIAL FIRST FLOW	1544	1568.7	30.0	30.4	F
C	FINAL FIRST FLOW	1544	1570.4			
C	INITIAL FIRST CLOSED-IN	1544	1570.4	61.0	59.6	C
D	FINAL FIRST CLOSED-IN	5758	5779.2			
E	INITIAL SECOND FLOW	1544	1576.9	54.0	54.9	F
F	FINAL SECOND FLOW	1544	1581.2			
F	INITIAL SECOND CLOSED-IN	1544	1581.2	30.0	30.1	C
G	FINAL SECOND CLOSED-IN	4561	4580.9			
H	FINAL HYDROSTATIC	7688	7736.3			

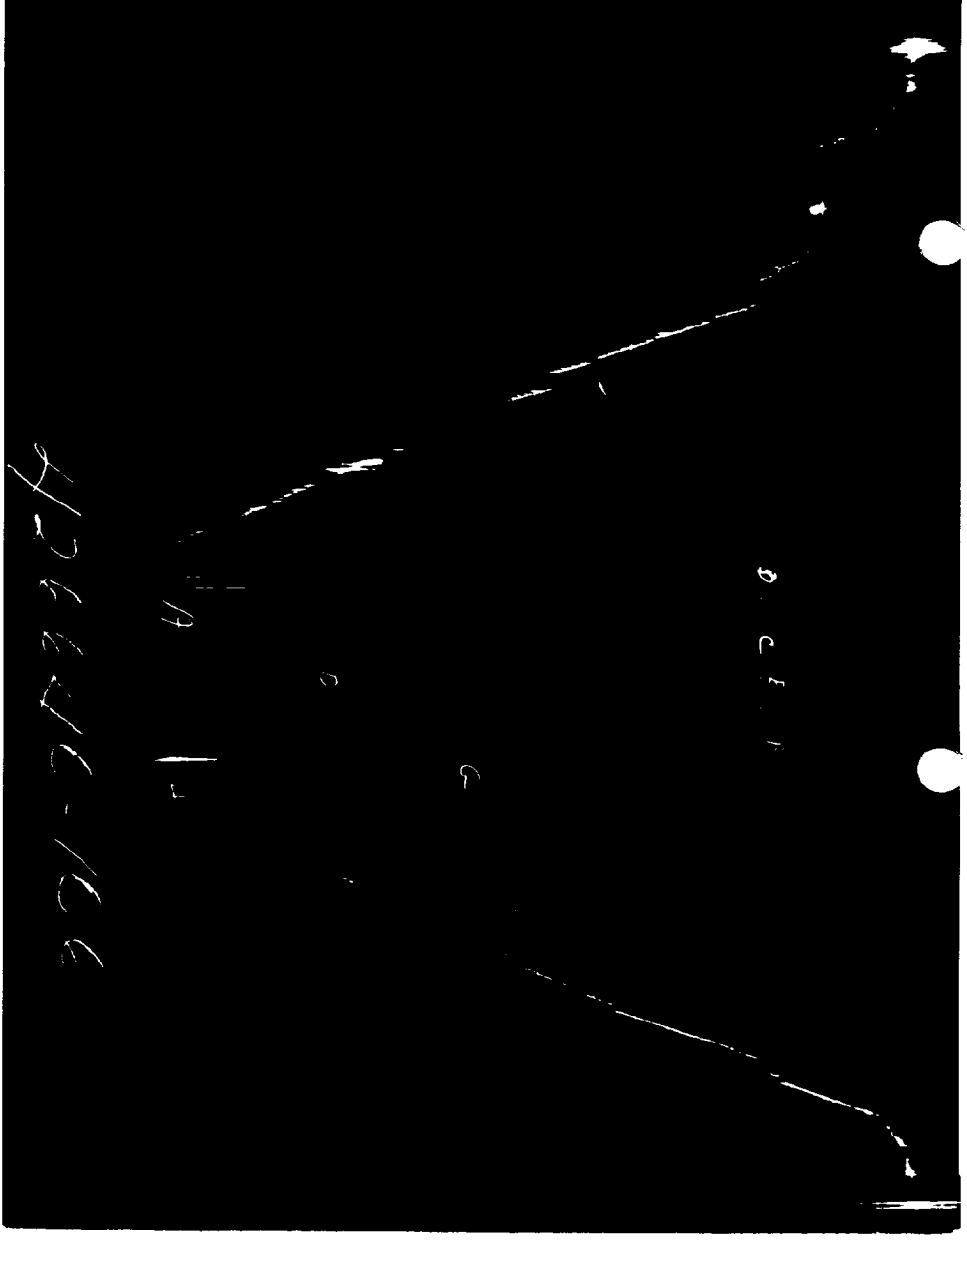

DESCRIPTION	PRESSURE		TIME		TYPE
	REPORTED	CALCULATED	REPORTED	CALCULATED	
INITIAL HYDROSTATIC	7753	7762.6			
INITIAL FIRST FLOW	1631	1641.6	30.0	30.4	F
INITIAL FIRST FLOW	1631	1641.6			
INITIAL FIRST CLOSED-IN	1631	1641.6	61.0	59.6	C
INITIAL FIRST CLOSED-IN	5878	5885.7			
INITIAL SECOND FLOW	1631	1648.8			
INITIAL SECOND FLOW	1631	1654.0	54.0	54.9	F
INITIAL SECOND CLOSED-IN	1631	1654.0			
INITIAL SECOND CLOSED-IN	4661	4667.8	30.0	30.1	C
INITIAL HYDROSTATIC	7753	7753.4			

EQUIPMENT & HOLE DATA		TICKET NUMBER: 42664000	
FORMATION TESTED: FILENBERGER		DATE: 1-17-83 TEST NO: 1	
NET PAY (ft): 140.0		TYPE DST: OPEN HOLE	
GROSS TESTED FOOTAGE: KELLY BLUING		HALLIBURTON COMP. HOODS	
COSTING PERFS. (ft): 8.500		TESTER: G. HOBBS	
HOLE OR CASING SIZE (in): 3642		WITNESS: FLOYD LOWERY	
ELEVATION (ft): 15495.0		MUD WEIGHT (lb/gal): 9.70	
TOTAL DEPTH (ft): 15350.1335		MUD VISCOSITY (sec): 35	
PECKER DEPTHS (ft): 15350.1335		ESTIMATED HOLE TEMP. (°F): 192.0	
FINEL SURFACE CHOKER (in): 0.750		ACTUAL HOLE TEMP. (°F): 15491.0	
BOTTOM HOLE CHOKER (in): 0.750		SAMPLER DATA	
MUD WEIGHT (lb/gal): 9.70		Psg. AT SURFACE: 0.00	
MUD VISCOSITY (sec): 35		RESISTIVITY CHLORIDES	
ESTIMATED HOLE TEMP. (°F): 192.0		cc OF OIL: 0	
ACTUAL HOLE TEMP. (°F): 15491.0		cc OF WATER: 2350	
SOURCE		TOTAL LIQUID cc: 2350	
FLUID PROPERTIES FOR RECOVERED MUD & WATER		HYDROCARBON PROPERTIES	
0.021 @ 70 °F		OIL GRAVITY (°API): 0 °F	
0.021 @ 70 °F		GAS/OIL RATIO (cu.ft. per bbl): 0 °F	
0.021 @ 70 °F		GAS GRAVITY: 0 °F	
0.021 @ 70 °F		RECOVERED: 155 FEET OF DRILLING MUD	
0.021 @ 70 °F		REMARKS: REPORTED ELEVATION IS AT GROUND LEVEL	
0.021 @ 70 °F		CLOCK BROCKED UP ON GAUGE # 108 WHEN TOOL OPENED.	

MEASURING DEVICE				POSITIVE CHANGE	TICKET NO. 42694000
CHOKE SIZE	SURFACE PRESSURE PSI	GAS RATE MCF	LIQUID RATE BPD	REMARKS	
				ON LOCATION.	
				PICKED UP THE TOOLS.	
				STARTED IN THE HOLE.	
	BH			OPENED TOOL - SLID 8' - NO BLOW.	
	BH			STROKE TOOL TO SEE IF OPEN.	
	BH			TOOL OPENED - SLID 6'-NO BLOW.	
	BH			STROKED TOOL.	
	BH			TOOL OPENED - SLID 2'-NO BLOW.	
	BH			NO BLOW.	
	BH			NO BLOW.	
	BH			CLOSED TOOL - NO BLOW.	
	BH			OPENED TOOL - NO BLOW.	
	BH			NO BLOW.	
	BH			NO BLOW.	
	BH			OPENED BYPASS - SET BRCK DOWN.	
	BH			STROKED TOOL.	
	BH			TOOL OPENED - NO BLOW.	
	BH			NO BLOW.	
	BH			CLOSED TOOL.	
	BH			OPENED BYPASS - STARTED OUT OF THE HOLE.	
	BH			BROKE TOOLS.	

TICKET NO: 42664000

CLOCK NO: 5931 HOUR: 24

GAUGE NO: 108

DEPTH: 15339.0

FIRST FLOW

B 1 0.0 1568.7
C 2 30.4 1570.4

FIRST CLOSED-IN

C 1 0.0 1570.4
2 1.0 1744.0
3 2.0 1944.0
4 3.0 2189.5
5 4.0 2410.8
6 5.0 2608.2
7 6.0 2779.0
8 7.0 2983.5
9 8.0 3185.5
10 9.0 3253.6
11 10.0 3377.2
12 12.0 3667.2
13 14.0 3847.0
14 16.0 4028.4
15 18.0 4225.5
16 20.0 4393.7
17 22.0 4539.0
18 24.0 4677.2
19 26.0 4804.5
20 28.0 4924.8
21 30.0 5184.3
22 35.0 5184.3
23 40.0 5372.4
24 45.0 5511.4
25 50.0 5622.8
26 55.0 5712.2
27 59.6 5773.2

1.0 1.478
1.9 1.571
2.7 1.053
3.5 0.935
4.3 0.847
5.2 0.725
6.4 0.679
7.0 0.640
7.5 0.607
8.6 0.548
9.6 0.505
11.3 0.429
12.1 0.402
12.8 0.377
13.4 0.365
14.0 0.356
15.1 0.304
16.3 0.271
17.3 0.246
18.1 0.224
18.9 0.206
19.3 0.195
20.1 0.179

SECOND FLOW

E 1 0.0 1576.9
2 1.0 1578.1
3 28.5 1581.2
F 4 54.9 1581.2

SECOND CLOSED-IN

F 1 0.0 1581.2
2 1.0 1629.1
3 2.0 2035.2
4 3.0 2221.6
5 4.0 2405.0
6 5.0 2581.0

1.0 1.950
1.9 1.641
2.9 1.470
3.9 1.384
4.7 1.280

SECOND CLOSED-IN - CONTINUED

7 6.0 2884.7
8 7.0 2827.3
9 8.0 2947.5
10 9.0 3068.4
11 10.0 3157.8
12 12.0 3371.5
13 14.0 3535.9
14 16.0 3717.9
15 18.0 3913.1
16 20.0 4134.8
17 22.0 4159.8
18 24.0 4380.3
19 26.0 4390.3
20 28.0 4450.6
21 30.1 4530.9

5.6 1.180
6.5 1.121
8.3 1.013
8.9 0.979
8.9 0.979
10.5 0.909
12.0 0.862
13.5 0.801
15.3 0.756
16.9 0.725
17.5 0.687
18.8 0.658
19.9 0.632
21.1 0.607
22.3 0.583

LEGEND:
1 BEFORE DEPRESSING

2 AFTER DEPRESSING

REMARKS:

TICKET NO: 42664000
CLOCK NO: 5931 HOUR: 24

HALIBURTON
LOGGING

GAUGE NO: 106
DEPTH: 15492.0

REF	MINUTES	PRESSURE	AP	TOTAL T.M.	Log T.M.
FIRST FLOW					
1	0.0	1841.6	386.4	1.0	1.456
2	1.0	2090.0	386.4	1.0	1.456
3	2.0	2247.7	386.4	1.0	1.456
4	3.0	2447.7	386.4	1.0	1.456
5	4.0	2644.4	386.4	1.0	1.456
6	5.0	2816.5	386.4	1.0	1.456
7	6.0	2982.0	386.4	1.0	1.456
8	7.0	3161.2	386.4	1.0	1.456
9	8.0	3351.5	386.4	1.0	1.456
10	9.0	3556.1	386.4	1.0	1.456
11	10.0	3777.2	386.4	1.0	1.456
12	12.0	3810.7	386.4	1.0	1.456
13	14.0	4028.4	386.4	1.0	1.456
14	16.0	4208.4	386.4	1.0	1.456
15	18.0	4380.3	386.4	1.0	1.456
16	20.0	4512.9	386.4	1.0	1.456
17	22.0	4642.4	386.4	1.0	1.456
18	24.0	4771.9	386.4	1.0	1.456
19	26.0	4887.1	386.4	1.0	1.456
20	28.0	4984.5	386.4	1.0	1.456
21	30.0	5086.4	386.4	1.0	1.456
22	35.0	5287.5	386.4	1.0	1.456
23	40.0	5454.3	386.4	1.0	1.456
24	45.0	5600.3	386.4	1.0	1.456
25	50.0	5712.2	386.4	1.0	1.456
26	55.0	5857.7	386.4	1.0	1.456
27	59.6	5857.7	386.4	1.0	1.456
SECOND FLOW					
1	0.0	1841.6	386.4	1.0	1.456
2	1.0	2090.0	386.4	1.0	1.456
3	2.0	2247.7	386.4	1.0	1.456
4	3.0	2447.7	386.4	1.0	1.456
5	4.0	2644.4	386.4	1.0	1.456
6	5.0	2816.5	386.4	1.0	1.456
7	6.0	2982.0	386.4	1.0	1.456
8	7.0	3161.2	386.4	1.0	1.456
9	8.0	3351.5	386.4	1.0	1.456
10	9.0	3556.1	386.4	1.0	1.456
11	10.0	3777.2	386.4	1.0	1.456
12	12.0	3810.7	386.4	1.0	1.456
13	14.0	4028.4	386.4	1.0	1.456
14	16.0	4208.4	386.4	1.0	1.456
15	18.0	4380.3	386.4	1.0	1.456
16	20.0	4512.9	386.4	1.0	1.456
17	22.0	4642.4	386.4	1.0	1.456
18	24.0	4771.9	386.4	1.0	1.456
19	26.0	4887.1	386.4	1.0	1.456
20	28.0	4984.5	386.4	1.0	1.456
21	30.0	5086.4	386.4	1.0	1.456
22	35.0	5287.5	386.4	1.0	1.456
23	40.0	5454.3	386.4	1.0	1.456
24	45.0	5600.3	386.4	1.0	1.456
25	50.0	5712.2	386.4	1.0	1.456
26	55.0	5857.7	386.4	1.0	1.456
27	59.6	5857.7	386.4	1.0	1.456
SECOND CLOSED-IN					
1	0.0	1854.0	290.6	1.0	1.936
2	1.0	2107.7	290.6	1.0	1.936
3	2.0	2323.2	290.6	1.0	1.936
4	3.0	2521.0	290.6	1.0	1.936
5	4.0	2699.7	290.6	1.0	1.936
6	5.0	2959.7	290.6	1.0	1.936

REPRESSING

INTER BRIMMING

	O.D.	I.D.	LENGTH	DEPTH
RILL PIPE.....	5.000	4.276	14810.0	
RILL COLLARS.....	6.500	2.500	376.0	
WPECT REVERSING SUB.....	5.875	2.750	1.0	15166.0
RILL COLLARS.....	6.500	2.500	124.0	
ROSSOVER.....	5.625	2.000	1.0	
MULTIPLE CIP SAMPLER.....	5.000	0.750	9.0	15316.0
XTENSION JOINT.....	5.000	0.870	5.0	
XTENSION JOINT.....	5.000	0.870	5.0	
XTENSION JOINT.....	5.000	0.870	5.0	
P RUNNING CASE.....	5.000	2.250	4.0	15393.0
RR.....	5.000	1.750	5.0	
R SRETY JOINT.....	5.000	1.000	3.0	
PER HOLE PACKER.....	7.750	1.530	5.0	15387.0
PER HOLE PACKER.....	7.750	1.530	5.0	15385.0
ANCHOR PIPE SRETY JOINT.....	5.750	3.500	4.0	
ROSSOVER.....	5.625	2.500	1.0	
RILL COLLARS.....	6.500	2.500	97.0	
ROSSOVER.....	5.500	2.500	1.0	
LUSH JOINT ANCHOR.....	5.750	3.500	30.0	
ARMED-OFF RUNNING CASE.....	5.750		4.0	15432.0
RILL DEPTH				15495.0

EQUIPMENT DATA