

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS


(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐  
well well
2. NAME OF OPERATOR  
Harvey E. Yates Company
3. ADDRESS OF OPERATOR  
P. O. Box 1933, Roswell, NM 88201
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 330' FNL & 1650' FEL  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH: Same
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input checked="" type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input checked="" type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) Treatment <input type="checkbox"/>	<input type="checkbox"/>

5. LEASE  
NM-38467
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME  
West Lynch 30
9. WELL NO.  
1
10. FIELD OR WILDCAT NAME  
Wildcat *Leas of SR*
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 30, T-20S, R-34E
12. COUNTY OR PARISH  
Lea
13. STATE  
NM
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
3662.3 GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

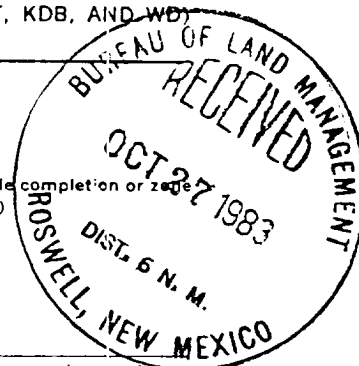

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

8/28/83 MI & RU CU.  
8/30/83 Set anchors, cut off 5 1/2" csg & weld on prod csg head. Ru swivel & strt drlg out to 1560'.  
8/31/83 Drl out cmt, drl 10' cmt to 3457' to float collar, drl float collar 41' to 3500' to float shoe. Drlg 3517' - 3519' (Seven Rivers).  
9/01/83 Ru Geo Vann & run GR Neutron. PBTd 3519'. Ran logs from 3519'-3200', correlate to orginal dresser hole logs. Ran GR/CBL/CCL from 3519' - 700'. Csg shoe @ 3500', Float Collar @ 3458', DV Tool @ 1559.  
9/09/83 RU Geo Vann & GIH w/Howco cmt ret & 2 3/8" tbg (3498'). Cmt w/50 sx class "C" neat. Ru Wireling & perf Yates Sd @ 3299' - 3494' w/1 sp depth (10 holes)  
9/10/83 RU Howco & spot 7 1/2 gal MYA. Strt 1800 gal acid & 20 ball sealers.  
9/13/83 Frac dwn csg w/44000 gal, 3% WF-60 w/25% CO2 using 50,000# 20/40 sd.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED *Ray T. Oakes* TITLE Res. Engineer DATE 10/26/83

(This space for Federal or State office use)

ACCEPTED FOR RECORD

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY

OCT 27 1983