

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-101
Revised 1-1-65

5A. Indicate Type of Lease
STATE ☒ FEE ☐

5. State Oil & Gas Lease No.

E-5886

APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

1a. Type of Work
b. Type of Well
OIL WELL ☒ GAS WELL ☐ OTHER ☐
DRILL ☒ DEEPEN ☐ PLUG BACK ☐
SINGLE ZONE ☒ MULTIPLE ZONE ☐

7. Unit Agreement Name

8. Farm or Lease Name

LEA 'AQ' STATE

9. Well No.

2

10. Field and Pool, or Wildcat

WEST PEARL - SAN AND

UNDESIGNATED

12. County

LEA

2. Name of Operator
GULF OIL CORPORATION
3. Address of Operator
P.O. Box 670 HOBBS, NEW MEXICO
4. Location of Well
UNIT LETTER D LOCATED 880 FEET FROM THE NORTH LINE
AND 330 FEET FROM THE WEST LINE OF SEC. 33 TWP. 19S RGE. 35 E NMPM

21. Elevations (Show whether DI, RT, etc.) 3730.9 GL	21A. Kind & Status Plug. Bond BLANKET	19. Proposed Depth 6050	19A. Formation SAN ANDRES	20. Rotary or C.T. ROTARY
		21B. Drilling Contractor UNKNOWN	22. Approx. Date Work will start SEPT 1 1983	

PROPOSED CASING AND CEMENT PROGRAM

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	SACKS OF CEMENT	EST. TOP
12 1/4	8 5/8	24	400'	250 SKS	SURFACE
7 1/8	5 1/2	15.50	6050'	500 SKS	SURFACE

MUD PROGRAM

0-400' FW SPUD MUD 8.6-8.8 pp9 32-36 vis

400'-6050 SATURATED BRINE SYSTEM 9.8-10.0 pp9 29-34 vis

APPROVAL VALID FOR 180 DAYS
PERMIT EXPIRES 2/17/84
UNLESS DRILLING UNDERWAY

BOP DRAWING #2 3000 psi WP

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

Signed L. C. Corder Title AREA PRODUCTION MANAGER Date 8-15-83

(This space for State Use)


ORIGINAL SIGNED BY JERRY SEXTON

APPROVED BY DISTRICT SUPERVISOR TITLE

CONDITIONS OF APPROVAL, IF ANY:

AUG 17 1983

DATE

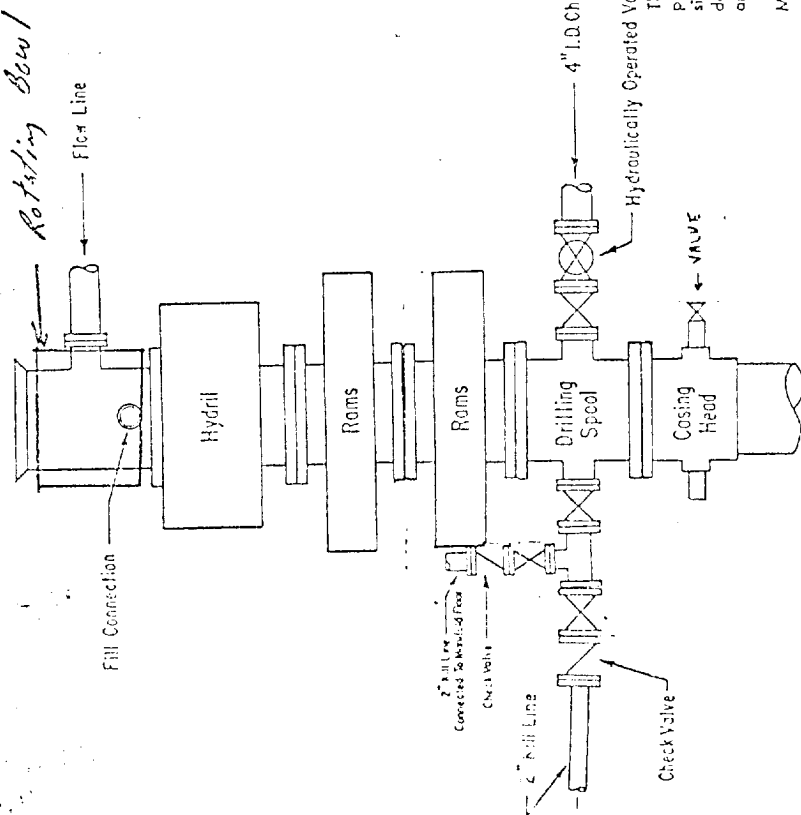


2000 - 3000 PSI WORKING PRESSURE BOP HOOK-UP FOR LARGE CASINGS

SPECIFY WORKING PRESSURE

labeled, with control handles to indicate open and closed positions. A pressure reducer and regulator must be provided for operating the Hydril preventer. When requested, a second pressure reducer shall be available to limit operating fluid pressures to ram preventers. Gulf Legion No. 36 hydraulic oil, an equivalent or better, is to be used as the fluid to operate the hydraulic equipment.

The choke manifold, the choke line and the relief lines are to be supported by metal stands and adequately anchored. The choke flow line, relief lines and choke lines shall be constructed as straight as possible and without sharp bends. Easy access shall be maintained to the choke manifold. All valves are to be selected for operation in the presence of oil, gas, and drilling fluids. The choke flow line valves and valves of the relief lines connected to the drilling spools and all ram type preventers must be equipped with stem extensions, universal joints if needed and hand wheels which are to extend beyond the edge of the derrick substructure. All other valves shall be equipped with handles.

ADDITIONS - DELETIONS - CHANGES SPECIFY
NOTE: "When Requested" means at any time the Gulf Supervisor can, may, or will require the equipment to be installed during operations. Rotating Bowl to be installed TO BURN PIT w/ TO RESERVE PIT

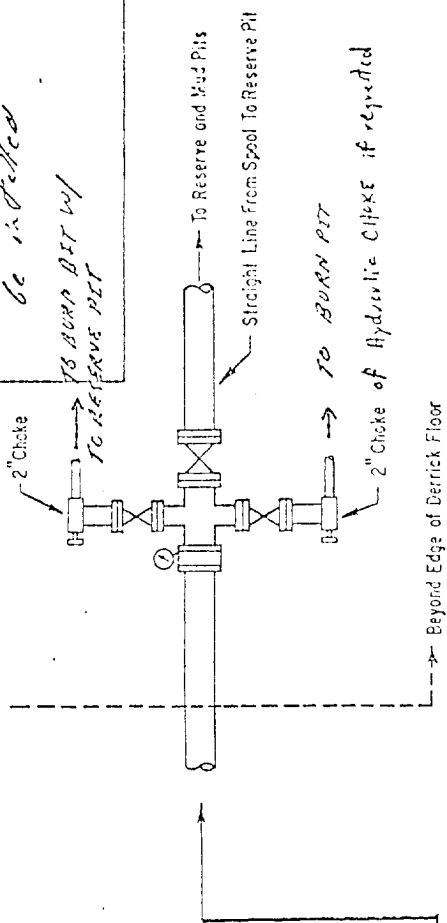

The Blowout Preventer Operated Valve WHEN REQUESTED

The blowout preventer assembly shall consist of one blind ram preventer and one pipe ram preventer, both hydraulically operated, a Hydril preventer, valves, chokes and connections, as illustrated. If a tapered drill string is used, a ram preventer shall be provided for each size of drill pipe. Casing and tubing rams to fit the preventers are to be available as needed. The ram preventers may be two singles or a double type. If correct in size, the flanged outlets of the ram preventer may be used for connecting to the 4-inch I.D. choke flow line and to the kill line. The substructure height shall be sufficient to install a rotating blowout preventer.

Minimum operating equipment for the preventers and hydraulically operated valves shall be as follows: (1) multiple pumps, driven by a continuous source of power, capable of fluid charging the total accumulator volume from the nitrogen precharge pressure to its rated pressure within 2 minutes. Also, the pumps are to be connected to the hydraulic operating system which is to be a closed system. (2) accumulators with a precharge of nitrogen of not less than 750 PSI and connected so as to receive the aforementioned fluid charge. With the charging pumps shut down, the pressurized fluid volume stored in the accumulator shall be sufficient to close all the pressure-operated devices simultaneously within 1/9 seconds after closure, the remaining accumulator pressure shall be not less than 1000 PSI with the remaining accumulator fluid volume at least 50 percent of the original. When requested, either an additional source of power, remote and equivalent, is to be available to operate the above pumps, or there shall be additional pumps operated by separate power and equal in performance capabilities.

The closing manifold and remote closing manifold shall have a separate control for each pressure-operated device. Controls are to be labeled, with control handles to indicate open and closed positions. A pressure reducer and regulator must be provided for operating the Hydril preventer. When requested, a second pressure reducer shall be available to limit operating fluid pressures to ram preventers. Gulf Legion No. 36 hydraulic oil, an equivalent or better, is to be used as the fluid to operate the hydraulic equipment.

**NEW MEXICO OIL CONSERVATION COMMISSION
WELL LOCATION AND ACREAGE DEDICATION PLAT**

Form C-102
Supersedes C-128
Effective 1-1-65

All distances must be from the outer boundaries of the Section

Operator Gulf Oil Corporation		Lease Lea AQ State		Well No. 2
Unit Letter D	Section 33	Township 19 South	Range 35 East	County Lea County

Actual Footage Location of Well:


880 feet from the North line and		330 feet from the West line	
Ground Level Elev. 3730.9	Producing Formation San Andres	Pool West Pearl San Andres	Dedicated Acreage 40

- Outline the acreage dedicated to the subject well by colored pencil or hatchure marks on the plat below.
- If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
- If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation _____

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) _____

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

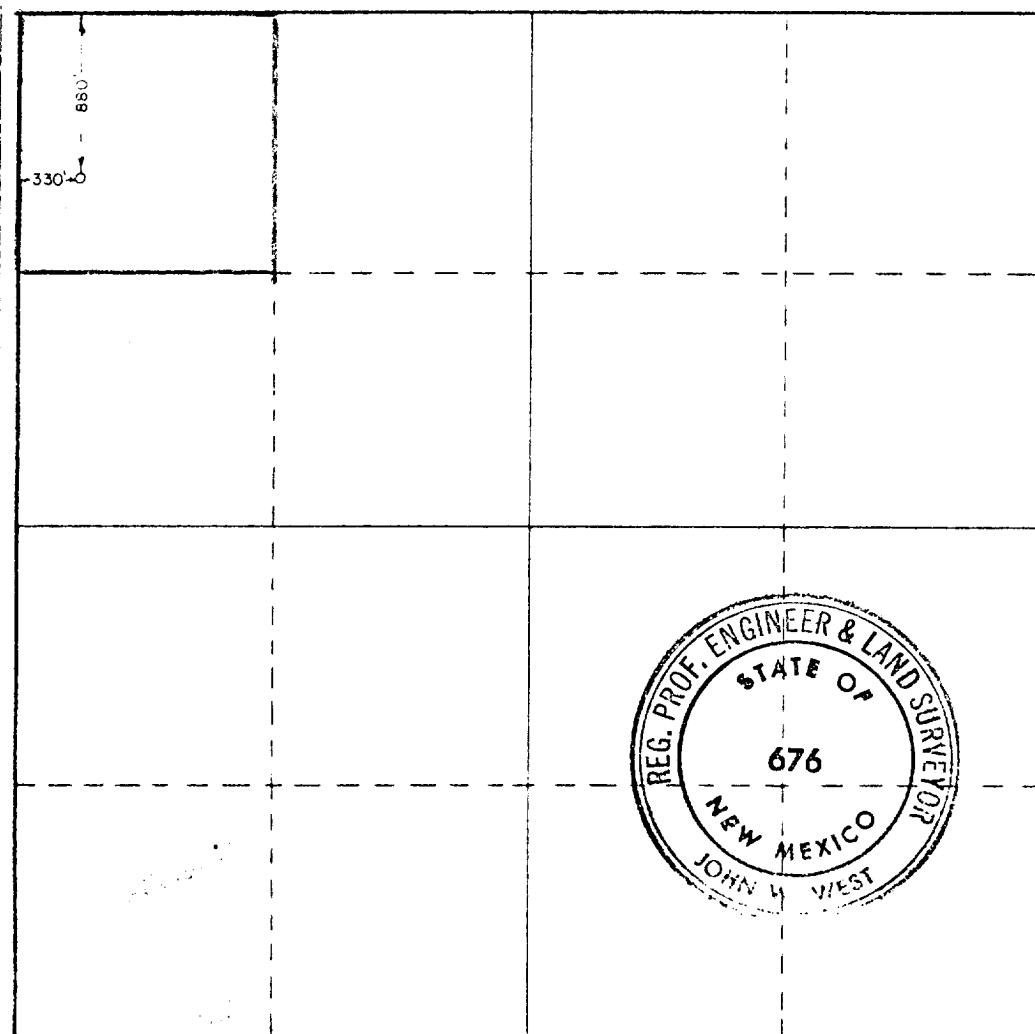

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

R.C. Anderson

Name **R.C. ANDERSON**

Position **AREA PRODUCTION MGR**

Company **GULF OIL CORPORATION**

Date **8-15-83**

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed **August 12, 1983**

Registered Professional Engineer and/or Land Surveyor

John W. West

Certificate No. **JOHN W. WEST 676**

RONALD J. EIDSON 3239





RECEIVED

AUG 16 1983

O.C.D.
HOBBS OFFICE