

|                        |  |
|------------------------|--|
| NO. OF COPIES RECEIVED |  |
| DISTRIBUTION           |  |
| SANTA FE               |  |
| FILE                   |  |
| U.S.G.S.               |  |
| LAND OFFICE            |  |
| OPERATOR               |  |

# NEW MEXICO OIL CONSERVATION COMMISSION

Form C-101  
Revised 1-1-65

5A. Indicate Type of Lease  
STATE ☒ FEE ☐

5. State Oil & Gas Lease No.  
**E 8183 + E 8184**

## APPLICATION FOR PERMIT TO DRILL, DEEPEN, OR PLUG BACK

|                                                                                                                                                                                                           |  |                                                                                                              |  |                                                                                        |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------|--|
| 1a. Type of Work<br>b. Type of Well<br>OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>                                                      |  | DRILL <input checked="" type="checkbox"/> DEEPEN <input type="checkbox"/> PLUG BACK <input type="checkbox"/> |  | SINGLE ZONE <input checked="" type="checkbox"/> MULTIPLE ZONE <input type="checkbox"/> |  |
| 2. Name of Operator<br><b>GULF OIL CORPORATION</b>                                                                                                                                                        |  |                                                                                                              |  | 7. Unit Agreement Name<br><b>WEST PEARL QUEEN</b>                                      |  |
| 3. Address of Operator<br><b>P.O. Box 670 HOBBS NM 88240</b>                                                                                                                                              |  |                                                                                                              |  | 8. Farm or Lease Name<br><b>West</b>                                                   |  |
| 4. Location of Well<br>UNIT LETTER <b>C</b> LOCATED <b>110</b> FEET FROM THE <b>NORTH</b> LINE<br>AND <b>1345</b> FEET FROM THE <b>WEST</b> LINE OF SEC. <b>32</b> TWP. <b>19 S</b> RGE. <b>35 E</b> NMPM |  |                                                                                                              |  | 9. Well No.<br><b>170</b>                                                              |  |
|                                                                                                                                                                                                           |  |                                                                                                              |  | 10. Field and Pool, or Wildcat<br><b>WEST PEARL QUEEN</b>                              |  |
|                                                                                                                                                                                                           |  |                                                                                                              |  | 12. County<br><b>LEA</b>                                                               |  |
| 19. Proposed Depth<br><b>5100</b>                                                                                                                                                                         |  | 19A. Formation<br><b>QUEEN</b>                                                                               |  | 20. Rotary or C.T.<br><b>ROTARY</b>                                                    |  |
| 21. Elevations (Show whether DT, RT, etc.)<br><b>3742.0 GLE</b>                                                                                                                                           |  | 21A. Kind & Status Plug. Bond<br><b>BLANKET</b>                                                              |  | 21B. Drilling Contractor<br><b>UNKNOWN</b>                                             |  |
|                                                                                                                                                                                                           |  |                                                                                                              |  | 22. Approx. Date Work will start<br><b>7/15/85</b>                                     |  |

## PROPOSED CASING AND CEMENT PROGRAM

| SIZE OF HOLE | SIZE OF CASING | WEIGHT PER FOOT | SETTING DEPTH | SACKS OF CEMENT                   | EST. TOP |
|--------------|----------------|-----------------|---------------|-----------------------------------|----------|
| 12 1/4       | 8 5/8          | 24              | 400           | 350 (460 FT <sup>3</sup> )        | SURFACE  |
| 7 7/8        | 5 1/2          | 15.5            | 5100          | To BE DETERMINED BY FLUID CALIPER | SURFACE  |

MUD PROGRAM : 0'-400' FW SPUD 8.6-8.9 PPG 32-36 VIS 8-9 PH  
400-500' BRINE WATER 10.0 PPG 29 VIS 9-10 PH

SEE ATTACHED BOP DRAWING FOR 2000-3000 PSI WORKING PRESSURE.

Permit Expires 6 Months From Approval Date Unless Drilling Underway.

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM. IF PROPOSAL IS TO DEEPEN OR PLUG BACK, GIVE DATA ON PRESENT PRODUCTIVE ZONE AND PROPOSED NEW PRODUCTIVE ZONE. GIVE BLOWOUT PREVENTER PROGRAM, IF ANY.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

Signed **R. D. Pate** Title **Area Engr.** Date **6/26/85**


(This space for State Use)

ORIGINAL SIGNED BY JERRY SEXTON  
DISTRICT I SUPERVISOR

APPROVED BY DATE **JUL 22 1985**

CONDITIONS OF APPROVAL, IF ANY:

| ADDITIONS - DELETIONS - CHANGES<br>SPECIFY                                                                                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| NOTE: "When Requested" means<br>at any time the GULF Supervisor<br>can, may, or will require the<br>equipment to be installed during<br>operations. |

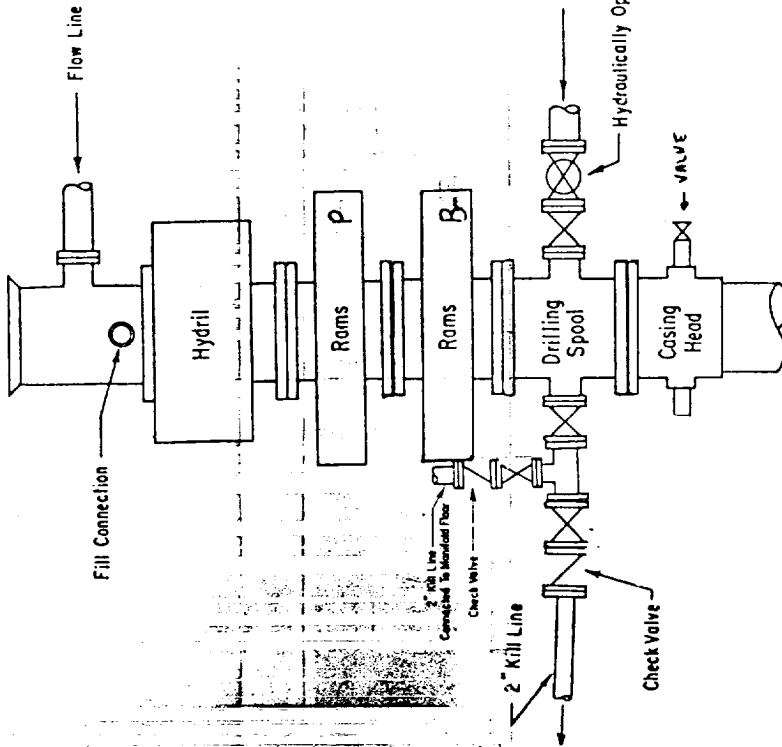


## 2000-3000 PSI WORKING PRESSURE BOP HOOK-UP FOR LARGE CASINGS

SPECIFY WORKING PRESSURE

The closing manifold and remote closing manifold shall have a separate control for each pressure-operated device. Controls are to be labeled, with control handles to indicate open and closed positions. A pressure reducer and regulator must be provided for operating the Hydril preventer. When requested, a second pressure reducer shall be available to limit operating fluid pressures to ram preventers. Gulf Legion No. 38 hydraulic oil, an equivalent or better, is to be used as the fluid to operate the hydraulic equipment.

The choke manifold, the choke line and the relief lines are to be supported by metal stands and adequately anchored. The choke flow line, relief lines and choke lines shall be constructed as straight as possible and without sharp bends. Easy and safe access shall be maintained to the choke manifold. All valves are to be selected for operation in the presence of oil, gas, and drilling fluids. The choke flow line valves and valves of the relief lines connected to the drilling spools and all ram type preventers must be equipped with stem extensions, universal joints if needed, and hand wheels which are to extend beyond the edge of the derrick substructure. All other valves shall be equipped with handles.

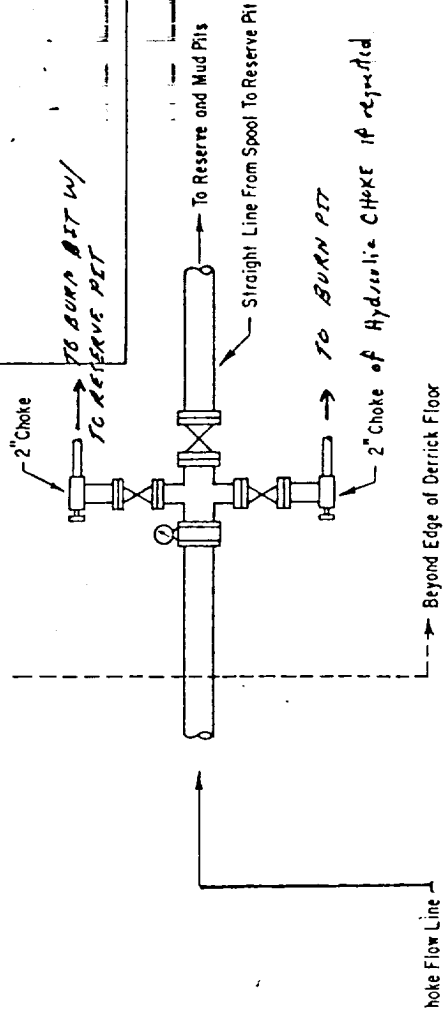

### The blowout preventer assembly shall consist of one blind ram preventer and one pipe ram preventer, both hydraulically operated; a Hydril preventer; valves; chokes and connections, as illustrated. If a tapered drill string is used, a ram preventer shall be provided for each size of drill pipe. Casing and tubing rams to fit the preventers are to be available as needed. The ram preventers may be two singles or a double type. If correct in size, the flanged outlets of the ram preventer may be used for connecting to the 4-inch I.D. choke flow line and to the kill line. The substructure height shall be sufficient to install a rotating blowout preventer.

Minimum operating equipment for the preventers and hydraulically operated valves shall be as follows: (1) multiple pumps, driven by a continuous source of power, capable of fluid charging the total accumulator volume from the nitrogen precharge pressure to its rated pressure within 2 minutes. Also, the pumps are to be connected to the hydraulic operating system which is to be a closed system. (2) accumulators with a precharge of nitrogen of not less than 750 PSI and connected so as to receive the aforementioned fluid charge. With the charging pumps shut down, the pressurized fluid volume stored in the accumulators shall be sufficient to close all the pressure-operated devices simultaneously within 1/4 second; after closure, the remaining accumulator pressure shall be not less than 1000 PSI with the remaining accumulator fluid volume at least 50 percent of the original. When requested, either an additional source of power, remote and equivalent, is to be available to operate the above pumps, or there shall be additional pumps operated by separate power and equal in performance capabilities.

The closing manifold and remote closing manifold shall have a separate control for each pressure-operated device. Controls are to be labeled, with control handles to indicate open and closed positions. A pressure reducer and regulator must be provided for operating the Hydril preventer. When requested, a second pressure reducer shall be available to limit operating fluid pressures to ram preventers. Gulf Legion No. 38 hydraulic oil, an equivalent or better, is to be used as the fluid to operate the hydraulic equipment.

The choke manifold, the choke line and the relief lines are to be supported by metal stands and adequately anchored. The choke flow line, relief lines and choke lines shall be constructed as straight as possible and without sharp bends. Easy and safe access shall be maintained to the choke manifold. All valves are to be selected for operation in the presence of oil, gas, and drilling fluids. The choke flow line valves and valves of the relief lines connected to the drilling spools and all ram type preventers must be equipped with stem extensions, universal joints if needed, and hand wheels which are to extend beyond the edge of the derrick substructure. All other valves shall be equipped with handles.

NEW MEXICO OIL CONSERVATION COMMISSION  
WELL LOCATION AND ACREAGE DEDICATION PLAN

Form C-102  
Supersedes C-128  
Effective 1-1-65

All distances must be from the outer boundaries of the Section

|                                                                                                   |                              |                                |                  |                                |  |
|---------------------------------------------------------------------------------------------------|------------------------------|--------------------------------|------------------|--------------------------------|--|
| Operator<br>GULF OIL CORP.                                                                        |                              | Lease<br>WEST PEARL QUEEN UNIT |                  | Well No.<br>170                |  |
| Unit Letter<br>C                                                                                  | Section<br>32                | Township<br>19 SOUTH           | Range<br>35 EAST | County<br>LEA                  |  |
| Actual Footage Location of Well:<br>110 feet from the NORTH line and 1345 feet from the WEST line |                              |                                |                  |                                |  |
| Ground Level Elev.<br>3742.0                                                                      | Producing Formation<br>QUEEN | Pool<br>WEST PEARL QUEEN       |                  | Dedicated Acreage:<br>40 Acres |  |


1. Outline the acreage dedicated to the subject well by colored pencil or hachure marks on the plat below.
2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).
3. If more than one lease of different ownership is dedicated to the well, have the interests of all owners been consolidated by communitization, unitization, force-pooling, etc?

☐ Yes ☐ No If answer is "yes," type of consolidation \_\_\_\_\_

If answer is "no," list the owners and tract descriptions which have actually been consolidated. (Use reverse side of this form if necessary.) \_\_\_\_\_

No allowable will be assigned to the well until all interests have been consolidated (by communitization, unitization, forced-pooling, or otherwise) or until a non-standard unit, eliminating such interests, has been approved by the Commission.

**APPLICATION HAS BEEN MADE FOR NON-STANDARD LOCATION**

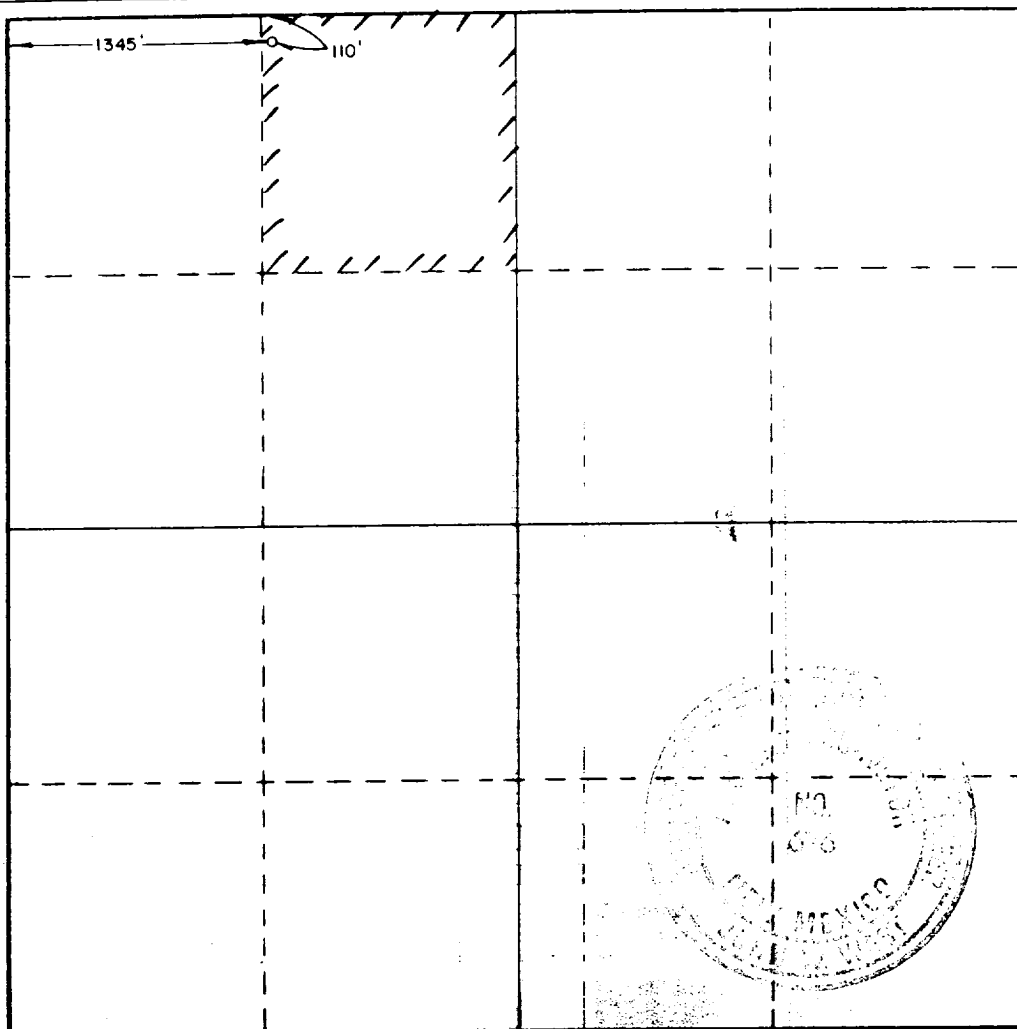

CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.

*R.D. Pitzer*

Name

Area Engr

Position

Gulf Oil E&P

Company

June 26, 1985

Date

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my knowledge and belief.

Date Surveyed

JUNE 24, 1985

Registered Professional Engineer and/or Land Surveyor

*John W. West*

Certificate No. JOHN W. WEST,

676

RONALD J. EIDSON,

3239

100-10000  
JUN 27 1965  
100-10000