


CONDITION II-B 3000 W.P.
FOR AIR DRILLING OR
WHERE YATES AIR BLOWS ARE EXPECTED

H₂S TRIM REQ'D
YES _____ NO _____

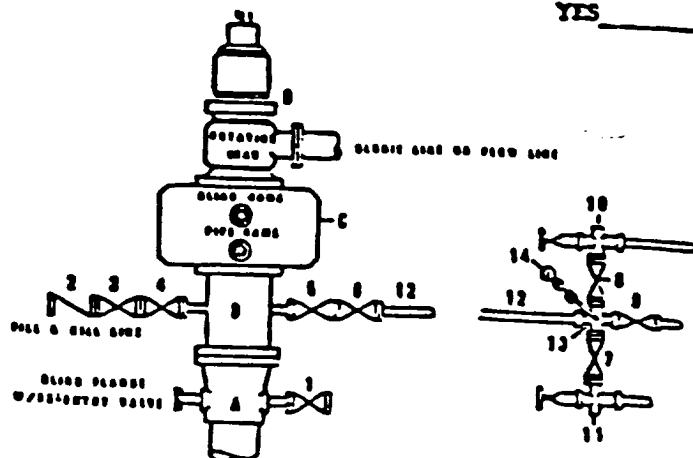

DRILLING CONTROL

MATERIAL LIST - CONDITION II - B
FOR AIR DRILLING

- A Texaco Wellhead
- B 3000 W.P. drilling spool with a 3" minimum flanged outlet for kill-line and 3" minimum flanged outlet for choke line
- C 3000 W.P. dual gate type preventer, hydraulic operated with 1" steel, 3000 W.P. control lines (where sub-structure height is adequate, 2-3000 W.P. single gate type preventers may be utilized.)
- D Rotating Head and extended choke line.
- 1, 3, 4, 7, 8 3" minimum 3000 W.P. flanged full opening steel gate valve, or Halliburton Lo Torr Plug valve.
- 2 3" minimum 3000 W.P. back pressure valve
- 5, 6, 9 3" minimum 3000 W.P. flanged full opening steel gate valve, or Halliburton Lo Torr Plug valve.
- 12 3" minimum schedule 80, Grade "B", seamless line pipe
- 13 3" minimum x 3" minimum 3000 W.P. flanged cross
- 10, 11 2" minimum 3000 W.P. adjustable choke bodies
- 14 Cameron Mud Gauge or equivalent (location optional) in choke line.

DESIGN DRAWN BY CHECKED BY APPROVED BY DATE REV. NO. DOC. NO.				TEXACO, INC. PRODUCING DEPARTMENT 15 (REV. 1) MIDLAND, TEXAS		EXHIBIT C
---	--	--	--	--	--	-------------------------

173