

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Conoco Inc.

3. Address and Telephone No.

10 Desta Drive STE 100W, Midland, TX 79705 (915)686-5424

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

400' FNL & 2190' FWL, SEC. 25, T-20S, R 33E, UNIT LTR 'P'

5. Lease Designation and Serial No.

NM 53994

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

RIO GRANDE 25 FED #1

9. API Well No.

30-025-31771

10. Field and Pool, or Exploratory Area

UNDESIGNATED DELAWARE

11. County or Parish, State

LEA CO., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☒ Other SET INTERMEDIATE CSG

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off

☐ Conversion to Injection


☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

DRILL 12 1/4" HOLE FROM 1557' TO 5435'.
11-14-92 GOH W/ 133 JTS 8 5/8" 32# M-80 LTC CSG TO 5419'.
SET SHOE @ 5425' AND COLLAR SET @ 5391'.
FIRST STAGE LEAD SLURRY 652 SX HALLIBURTON LITE + .4% HALAD 9 + 1/4 PPS FLOCELE.
TAIL SLURRY 330 SX CLASS C NEAT, 100SX CEMENT RETURNS. FULL RETURNS FOR THE ENTIRE JOB.
SECOND STAGE, COLLAR DEPTH @ 3473'. LEAD SLURRY 1435 SX HALLIBURTON LITE + 15 PPS SALT +
1/2 PPS FLOCELE. TAIL SLURRY 200 SX CLASS C + 2% CACL. FULL CMT RETURNS W/ 160 SX CIRC
CIRC TO SURFACE.

CONTINUE DRILLING 7 7/8" HOLE TO TD.

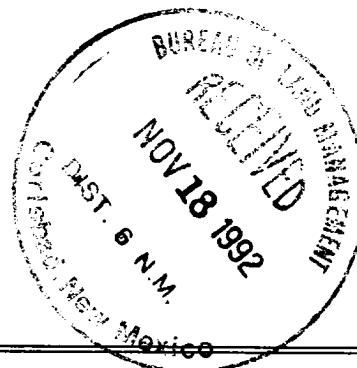

14. I hereby certify that the foregoing is true and correct

Signed

[Signature]

Title

SR. REGULATORY SPEC

Date

11-18-92

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date