


Anasazi "16" State #1
 Wildcat (Bone Spring)
 Lea Co., NM
 JGC 12-06-93

Proposed

KB: 3558'
 GL: 3539'

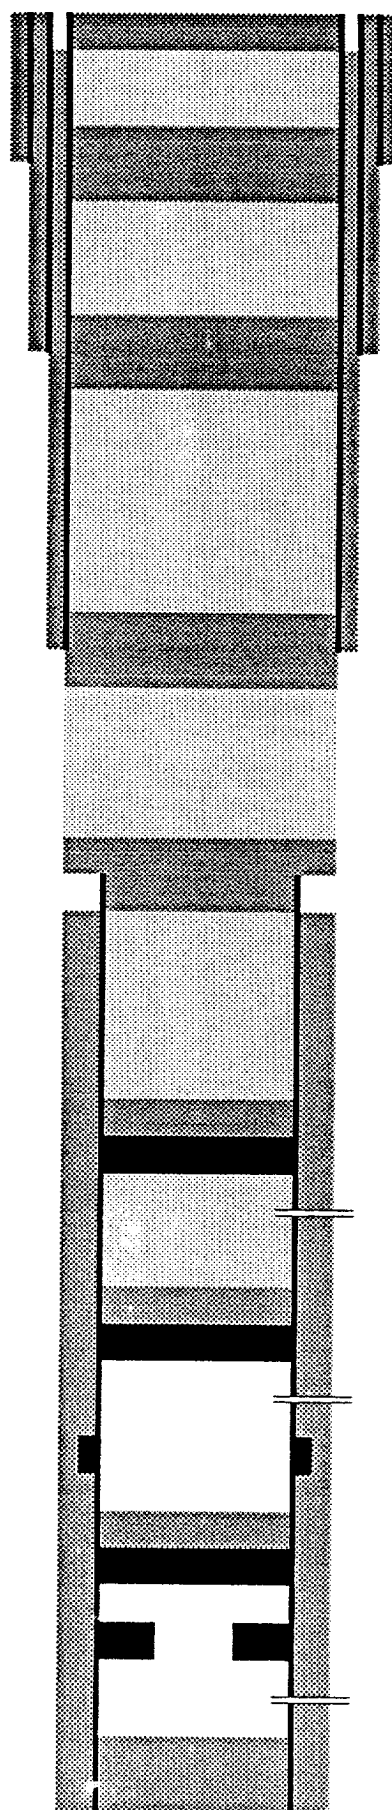

Cmt plug surface - 100'

20", 94#, K-55, BT&C @ 497'; cmt w/ 900 sx
 35 sx cmt plug 447' - 547'

13-3/8", 68#, K-55, BT&C @ 2964'; cmt w/ 2100 sx
 35 sx cmt plug 2914' - 3014'

Hole loaded w/ 9.5 ppg mud

8-5/8", 32#, K-55, LT&C @ 5299'; cmt w/ 1150 sx
 50 sx cmt plug 5249' - 5349'

35 sx cmt plug 50' below cs₃ stub to 50' above

TOC 8300'

CIBP @ 9295' w/ 35' cmt on top

9306' - 9352' (93 holes), 1st Bone Spring sand

CIBP @ 11,558' w/ 35' cement on top
 11576' - 11686' (47 holes), Wolfcamp

DV tool @ 11750'
 cmt w/ 750 sx
 CIBP @ 13,075' w/ 35' cmt on top

Otis Versa - retrieve pkr @ 13,095'
 13204' - 13482' (137 holes), Morrow

PBTD 13770'
 5-1/2", 17#, N-80 & S-95, LT&C @ 13858'
 cmt w/ 450 sx

TD 13860'