Form 3160-3 (December 1990)		OPER. OGRID N	0. <u>/ 2 ( / ~ )</u>	_ ISSION	Form approved.
	UNIT	E PROPERTY NO.	16391 '	2 40	Budget Bureau No. 1004-0136 Expires: December 31, 1991
	DEPARTMENT		37584	- 8 <b>8240</b>	LEASE DESIGNATION AND SERIAL NO.
	BUREAU OF	L /	10/06		C-065607
APPLI	CATION FOR PE	EFF. DATE	710/70		IF INDIAN, ALLOTTES OR TRIBE NAME
la. TYPE OF WORK	N N	API NO30.	125-3351		UNIT AGREEMENT NAME
b. Tipe of wall	ILL 🖸		1000	34/	ONIT AGENEMENT NAME
OIL X C.	AS OTHER		NGLE SAZONE	PLE 8.	FARM OR LEASE NAME, WELL NO.
NAME OF OPERATOR			E05/000		Hudson Federal
Read & Ste	vens, Inc.		505/622-	3770 9.	API WBLL NO.
P. O. Box	1518	Roswell.	NM 88202	10	FIBLD AND POOL, OR WILDCAT
At unriace	eport location clearly and		tate requirements.*)	- 0	<del>uail Ridge</del> Delaware
1 9	980' FNL & 19	80' FEL		11	SHC., T., R., M., OR BLK. AND SURVEY OR AREA
At proposed prod. son	same	1/	16	ĺ	Sec. 4-T20S-R34E
4. DISTANCE IN MILES .	AND DIRECTION FROM NEAR	EST TOWN OR POST OFFICE	· ·		COUNTY OR PARISH   18. STATE
30 miles S	W of Hobbs. N	Mi		ļ	Lea New Mexic
5. DISTANCE FROM PROPO LOCATION TO NEAREST	r		OF ACRES IN LEASE	17. NO. OF ACTOR THIS	RES ASSIGNED
PROPERTY OR LEASE ! (Also to nearest drig	g. unit line, if any)	60'	322.3		40
8. DISTANCE FROM PROF TO NEAREST WELL, D OR APPLIED FOR, ON TH	RILLING, COMPLETED, 1	044' .   19. PR	OPOSED DEPTH 8,400'	20. ROTARY O	R CABLE TOOLS
1. ELEVATIONS (Show wh	•	<u>i</u>	· · · · · · · · · · · · · · · · · · ·		2. APPROX. DATE WORK WILL START*
	•	3649' GL			June 24, 1996
3.		PROPOSED CASING AND	CEMENTING PROGRA		
NIZE OF HOLE	ORADE, SIZE OF CASING	WRIGHT PER FOOT	SETTING DEPTH	1	QUANTITY OF CRMENT
17 1/2"	13 3/8"J-55	54.5#	1600'		000 sx Lite = 200 '
11"	8 5/8"S-80 5 1/2"N-80	32.0#	5000'	-   <del></del>	100 sx **See Note
	5 1/2"N-80	17.0#	8400'	Tiebac	k w/500 or 975 sx*
7 7/8"	0 1/2 1 00	j		_ J.	
Mud Program:	1	***************************************		Vis.	W/L Control
, -	Fresh water nativ	e mud:	8.4 ppg	32	No W/L control
Mud Program: 0' - 1600': 1600' - 5000': 5000' - 8400':	Fresh water nativ	ve mud:	8.4 ppg 0.0 ppg		
Mud Program:  0' - 1600':  1600' - 5000':  5000' - 8400':  BOP Program:  A 11" 5000 psi  3/8" casing. Ca  a 3000 psi wp  * NOTE: If seddrill ahead WI	Fresh water native Brine mud: Fresh water mud  wp Shaffer Type asing and BOP will system.  Were lost circulate THOUT setting the	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing.	8.4 ppg 0.0 ppg 8.8 ppg 000 psi wp 11" (e drilling out wi	32 28-32 32-40 GK Hydril, w	No W/L control No W/L control No W/L control  Will installed on the 13 P will be tested daily as  at 5000' to 7 7/8" and
Mud Program:  0' - 1600': 1600' - 5000': 5000' - 8400':  BOP Program: A 11" 5000 psi 3/8" casing. Ca a 3000 psi wp  * NOTE: If seedrill ahead WI' ** 8 5/8": Ca	Fresh water native Brine mud: Fresh water mud  wp Shaffer Type asing and BOP will system.  were lost circulate THOUT setting the ement with DV tool	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st	8.4 ppg 0.0 ppg 8.8 ppg 000 psi wp 11" (e drilling out with tered, hole will carting at 3800':	32 28-32 32-40 GK Hydril, w	No W/L control No W/L control No W/L control will installed on the 13 P will be tested daily as
Mud Program:     0' - 1600': 1600' - 5000': 5000' - 8400':  BOP Program: A 11" 5000 psi 3/8" casing. Ca a 3000 psi wp  * NOTE: If seedrill ahead WI' ** 8 5/8": Ca 1st stage:	Fresh water native Brine mud: Fresh water mud  wp Shaffer Type asing and BOP will system.  Were lost circulate THOUT setting the	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st , tail in w/200 sx	8.4 ppg 0.0 ppg 8.8 ppg 000 psi wp 11" (e drilling out with tered, hole will carting at 3800': c "C".	32 28-32 32-40 GK Hydril, w th 11". BO	No W/L control No W/L control No W/L control vill installed on the 13 P will be tested daily as at 5000' to 7 7/8" and Approval Subject to General Requirements
Mud Program:     0' - 1600': 1600' - 5000': 5000' - 8400':  BOP Program: A 11" 5000 psi 3/8" casing. Ca a 3000 psi wp  * NOTE: If seedrill ahead WI' ** 8 5/8": Ca 1st stage: 2nd stage:	Fresh water native Brine mud: Fresh water mud: Fresh water mud  i wp Shaffer Type asing and BOP will system.  vere lost circulat. THOUT setting the ement with DV tool Lead 200 sx liter Lead 500 sx liter EPROPOSED PROGRAM: If	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st , tail in w/200 sz cement, tail w/2	8.4 ppg 0.0 ppg 8.8 ppg 000 psi wp 11" (e drilling out wi tered, hole will carting at 3800': ("C". 00 sx "C". Cemen	32 28-32 32-40  6K Hydril, with 11". BO  be reduced  t to surfac	No W/L control No W/L control No W/L control Vill installed on the 13 P will be tested daily as  at 5000' to 7 7/8" and Approval Subject to General Requirements a e. Special Stipulations Attached productive zone. If proposal is to drill or
Mud Program:  0' - 1600': 1600' - 5000': 5000' - 8400':  BOP Program: A 11" 5000 psi 3/8" casing. Ca a 3000 psi wp  * NOTE: If seedrill ahead WI' ** 8 5/8": Ca 1st stage: 2nd stage: NABOVE SPACE DESCRIB	Fresh water native Brine mud: Fresh water mud: Fresh water mud  i wp Shaffer Type asing and BOP will system.  vere lost circulate THOUT setting the ement with DV tool Lead 200 sx lite Lead 500 sx lite and 500 sx lite Lead 500 sx lite EPROPOSED PROGRAM: It intent data on subsurface location	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st tail in w/200 st cement, tail w/2 exposal is to deepen, give data s and measured and true vertice	8.4 ppg 0.0 ppg 8.8 ppg 0.0 psi wp 11" (e drilling out with tered, hole will tered, hole will tered, at 3800': 0 "C". 00 sx "C". Cemen on present productive zone al depths. Give blowout prevented.	32 28-32 32-40  GK Hydril, with 11". BO  be reduced  t to surface and proposed new enter program, if an	No W/I. control No W/L control No W/L control  will installed on the 13 P will be tested daily as  at 5000' to 7 7/8" and  Approval Subject to General Requirements a e. Special Stipulations Attached productive zone. If proposal is to drill or y.
Mud Program:  0' - 1600': 1600' - 5000': 5000' - 8400':  BOP Program: A 11" 5000 psi 3/8" casing. Ca a 3000 psi wp  * NOTE: If seedrill ahead WI' ** 8 5/8": Ca 1st stage: 2nd stage: NABOVE SPACE DESCRIB	Fresh water native Brine mud: Fresh water mud: Fresh water mud  i wp Shaffer Type asing and BOP will system.  vere lost circulate THOUT setting the ement with DV tool Lead 200 sx lite Lead 500 sx lite and 500 sx lite Lead 500 sx lite EPROPOSED PROGRAM: It intent data on subsurface location	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st tail in w/200 st cement, tail w/2 exposal is to deepen, give data s and measured and true vertice	8.4 ppg 0.0 ppg 8.8 ppg 0.0 psi wp 11" (e drilling out with tered, hole will tered, hole will tered, at 3800': 0 "C". 00 sx "C". Cemen on present productive zone al depths. Give blowout prevented.	32 28-32 32-40  GK Hydril, with 11". BO  be reduced  t to surface and proposed new enter program, if an	No W/I. control No W/L control No W/L control  will installed on the 13 P will be tested daily as  at 5000' to 7 7/8" and  Approval Subject to General Requirements a e. Special Stipulations Attached productive zone. If proposal is to drill or y.
Mud Program:  0' - 1600':  1600' - 5000':  5000' - 8400':  BOP Program:  A 11" 5000 psi  3/8" casing. Ca  a 3000 psi wp  * NOTE: If seedrill ahead WI'  ** 8 5/8": Ca  1st stage:  2nd stage:  NABOVE SPACE DESCRIB  seepen directionally, give pertical.	Fresh water native Brine mud: Fresh water mud: Fresh water mud  i wp Shaffer Type asing and BOP will system.  vere lost circulate THOUT setting the ement with DV tool Lead 200 sx lite Lead 500 sx lite Lead 500 sx lite intent data on subsurface location	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st tail in w/200 sz cement, tail w/2 exposal is to deepen, give data s and measured and true vertice	8.4 ppg 0.0 ppg 8.8 ppg 0.0 psi wp 11" (e drilling out with tered, hole will tered, hole will tered, at 3800': 0 "C". 00 sx "C". Cemen on present productive zone al depths. Give blowout prevented.	32 28-32 32-40  GK Hydril, with 11". BO  be reduced  t to surface and proposed new enter program, if an	No W/I. control No W/L control No W/L control  will installed on the 13 P will be tested daily as  at 5000' to 7 7/8" and  Approval Subject to General Requirements a e. Special Stipulations Attached productive zone. If proposal is to drill or y.
Mud Program:  0' - 1600':  1600' - 5000':  5000' - 8400':  BOP Program:  A 11" 5000 psi  3/8" casing. Ca  a 3000 psi wp  * NOTE: If seedrill ahead WI'  ** 8 5/8": Ca  1st stage:  2nd stage:  NABOVE SPACE DESCRIB  seepen directionally, give pertical.	Fresh water native Brine mud: Fresh water mud: Fresh water mud  i wp Shaffer Type asing and BOP will system.  vere lost circulate. THOUT setting the ement with DV tool Lead 200 sx lite.  Lead 500 sx lite.  Lead 500 sx lite.  EPROPOSED PROGRAM: If intent data on subsurface location.  Trail or State office use)	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st tail in w/200 sz cement, tail w/2 exposal is to deepen, give data s and measured and true vertice.  Ag	8.4 ppg 0.0 ppg 8.8 ppg 0.0 psi wp 11" (e drilling out with tered, hole will tered, hole will tered, at 3800':  ("C". 00 sx "C". Cemen on present productive zone al depths. Give blowout prevent for: ead & Steven:	32 28-32 32-40  GK Hydril, with 11". BO  be reduced  t to surface and proposed new enter program, if and street street.	No W/L control No W/L control No W/L control  Fill installed on the 13  P will be tested daily as  at 5000' to 7 7/8" and  Approval Subject to General Requirements at e. Special Stipulations Attached  productive zone. If proposal is to drill or y.  May 30, 1996  DATE
Mud Program:  0' - 1600': 1600' - 5000': 5000' - 8400':  BOP Program: A 11" 5000 psi 3/8" casing. Ca a 3000 psi wp  * NOTE: If seedrill ahead WI' ** 8 5/8": Ca 1st stage: 2nd stage: 2nd stage: NABOVE SPACE DESCRIB repen directionally, give pent  (This space for Fede	Fresh water native Brine mud: Fresh water mud: Fresh water mud  i wp Shaffer Type asing and BOP will system.  were lost circulate. THOUT setting the ement with DV tool Lead 200 sx lite.  Lead 500 sx lite.  Lead 500 sx lite.  E PROPOSED PROGRAM: If intent data on subsurface location.	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st , tail in w/200 st cement, tail w/2 exposal is to deepen, give data s and measured and true vertices.  Ag	8.4 ppg 0.0 ppg 8.8 ppg 0.0 ppg 8.8 ppg 0.0 psi wp 11" (e drilling out wi tered, hole will carting at 3800': c "C". 00 sx "C". Cemen on present productive zone al depths. Give blowout prev gent for: ad & Steven:	32 28-32 32-40  GK Hydril, with 11". BO  be reduced  t to surfact and proposed new enter program, if and some some some some some some some some	No W/L control No W/L control No W/L control  Fill installed on the 13  P will be tested daily as  at 5000' to 7 7/8" and  Approval Subject to General Requirements at e. Special Stipulations Attached  Productive zone. If proposal is to drill or y.  May 30, 1996  DATE
Mud Program:  0' - 1600': 1600' - 5000': 5000' - 8400':  BOP Program: A 11" 5000 psi 3/8" casing. Ca a 3000 psi wp  * NOTE: If seedrill ahead WI' ** 8 5/8": Ca 1st stage: 2nd stage: 2nd stage: NABOVE SPACE DESCRIB Repen directionally, give pentions.  (This space for Fede	Fresh water native Brine mud: Fresh water mud: Fresh water mud  wp Shaffer Type asing and BOP will system.  were lost circulate. THOUT setting the ement with DV tool Lead 200 sx lite.  Lead 500 sx lite.  Lead 500 sx lite.  E PROPOSED PROGRAM: If inent data on subsurface location.  The proposed program of the setting the setting the lead 500 sx lite.  The proposed program is the setting that the setting the setting that the sett	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing. in two stages st , tail in w/200 st cement, tail w/2 exposal is to deepen, give data s and measured and true vertices.  Ag	8.4 ppg 0.0 ppg 8.8 ppg 0.0 ppg 8.8 ppg 0.0 psi wp 11" (e drilling out wi tered, hole will carting at 3800': c "C". 00 sx "C". Cemen on present productive zone al depths. Give blowout prev gent for: ad & Steven:	32 28-32 32-40  GK Hydril, with 11". BO  be reduced  t to surfact and proposed new enter program, if and some some some some some some some some	No W/L control No W/L control No W/L control  will installed on the 13 P will be tested daily as  at 5000' to 7 7/8" and  Approval Subject to General Requirements at e. Special Stipulations Attached  productive zone. If proposal is to drill or y.  May 30, 1996  DATE
Mud Program:  0' - 1600': 1600' - 5000': 5000' - 8400':  BOP Program: A 11" 5000 psi 3/8" casing. Ca a 3000 psi wp  * NOTE: If seed drill ahead WI' ** 8 5/8": Ca 1st stage: 2nd stage: 2nd stage: NABOVE SPACE DESCRIB repen directionally, give pentions  (This space for Federally Space for Federally No.  Application approval does not conditions of APPROVAL	Fresh water native Brine mud: Fresh water mud: Fresh water mud  wp Shaffer Type asing and BOP will system.  were lost circulate. THOUT setting the ement with DV tool Lead 200 sx lite.  Lead 500 sx lite.  Lead 500 sx lite.  E PROPOSED PROGRAM: If inent data on subsurface location.  The proposed program of the setting the setting the lead 500 sx lite.  The proposed program is the setting that the setting the setting that the sett	w/starch:  LWS BOP, with a 5 be tested before ion is not encoun 8 5/8" casing.  in two stages st, tail in w/200 st. cement, tail w/2 croposal is to deepen, give datas and measured and true vertice.  Agental in the company of the composal is to deepen, give datas and measured and true vertice.  Agental ion w/200 st. cement, tail w/2 croposal is to deepen, give datas and measured and true vertice.	8.4 ppg 0.0 ppg 8.8 ppg 0.0 psi wp 11" (e drilling out wi tered, hole will carting at 3800': ("C". 00 sx "C". Cemen on present productive zone al depths. Give blowout prev gent for: ead & Steven:	32 28-32 32-40  GK Hydril, with 11". BO  be reduced  t to surfact and proposed new enter program, if and  S. Inc.	No W/I. control No W/L control No W/L control Vill installed on the 13 P will be tested daily as  at 5000' to 7 7/8" and  Approval Subject to General Requirements at e. Special Stipulations Attached productive zone. If proposal is to drill or y.  May 30, 1996  DATE  entitle the applicant to conduct operations there

# State of New Mexic

Energy, Minerals and Natural Resources Department

Form C-102 Revised February 10, 1994 Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

#### DISTRICT II P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III 1000 Rio Brazos Rd., Axtec, NM 87410

DISTRICT IV P.O. BOX 2068, SANTA FE, N.M. 87504-2068

# OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

3D-D25-334	Pool Code 37584	WE L&Q Pool Name Quail Ridge Delaware
Property Code 16391	Property HUDSON FE	Name Well Number
ogrid no. 18917	Operator READ & STEV	1

### Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
G	4	20 S	34 E		1980	NORTH	1980	EAST	LEA

#### Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
l·									
Dedicated Acres	Joint o	r Infill Co	nsolidation (	Code Or	der No.				
40									

# NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

LOT 4	LOT 3	LOT 2	LOT 1	OPERATOR CERTIFICATION  I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.
40.21 ACRES	40.44 ACRES	LC-065607 Edward R. Hud	son, etal	Signature  George R. Smith, agent for:
		3651.2' 3651.8' 0 3649.9' 3650.7'	1980'	Printed Name  Read & Stevens, Inc.  Title  May 30, 1996  Date
				SURVEYOR CERTIFICATION  I hereby certify that the well location shown on this plat was plotted from field notes of extual surveys made by me or under my supervison, and that the same is true and
				Date Surreyed Walling DMCC Signature & Seal of the DMCC Professional Surveyed The DMCC
				Romal 49 Billion 5-24-96
				Certificate No. JOHN & WEST 676 RONNO 3 EIDSON 3239 PROPESSOR EIDSON 12641

# APPLICATION FOR DRILLING

### READ & STEVENS, INC. Hudson Federal, Well No. 8

### 1980' FNL & 1980' FEL. Sec. 4-T20S-R34E

Lea County, New Mexico Lease No.: LC-065607 (Development Well)

In conjunction with Form 3160-3, Application for Permit to Drill subject well. Read & Stevens, Inc. submits the following items of pertinent information in accordance with BLM requirements:

- '1. The geologic surface formation is recent Permian with quaternary alluvium and other surficial deposits.
  - 2. The estimated tops of geologic markers are as follows:

Rustler	1,480'	Bone Spring	8,180'
Top of Salt	1,700'	T.D.	8,400'
Base of Salt	3,080'		
Yates	3,3301		
Queen	3,600'		
Delaware	5,480'		

3. The estimated depths at which water, oil or gas formations are anticipated to be encountered:

Water: Surface water in the Triassic between 80' - 230'.

Oil: Possible in the Delaware below 5500'.

Gas: None expected.

- 4. Proposed Casing Program: See Form 3160-3.
- 5. Proposed Control Equipment: See Form 3160-3 and Exhibit "E".
- 6. Mud Program: See Form 3160-3.
- 7. Auxiliary Equipment: Blowout Preventer, gas detector, Kelly cock, pit level monitor, flow sensors and stabbing valve.
- 8. Testing, Logging, and Coring Program:

Drill Stem Tests: None unless warranted.

Logging: T.D. to 5000':

G/R, CNL-FDC, DLL, MSFL

T.D. to surface: G/R, neutron

Coring: None planned.

9. No abnormal pressures or temperatures are anticipated. In the event abnormal pressures are encountered the proposed mud program will be modified to increase the mud weight. Estimated BHP = 3300 psi (evac. hole) with temperature of 140°.

- 10. H<sub>2</sub>S: None expected. None in previously drilled wells, but a Drilling Operations Plan, Exhibit "F", is being submitted to cover this this contingency.
- 11. Anticipated starting date: June 24, 1996.
  Anticipated completion of drilling operations: Approx. 3 weeks.



# DRILLING CO., INC. - DIL WELL DRILLING CONTRACTORS

P. C. BOX 1498 ROSWELL, NEW MEXICO 88302-1498 808/623-8070 ROSWELL, NM

ARTEBIA, NM

# RIG # 1

# BLOWOUT PREVENTOR ARRANGEMENT

II" SHAFFER TYPE LWS, 5000 psi WP II" GK HYDRIL, 5000 psi WP 80 GALLON, 4 STATION PAYNE ACCUMULATOR 3000 psi WP CHOKE MANIFOLD

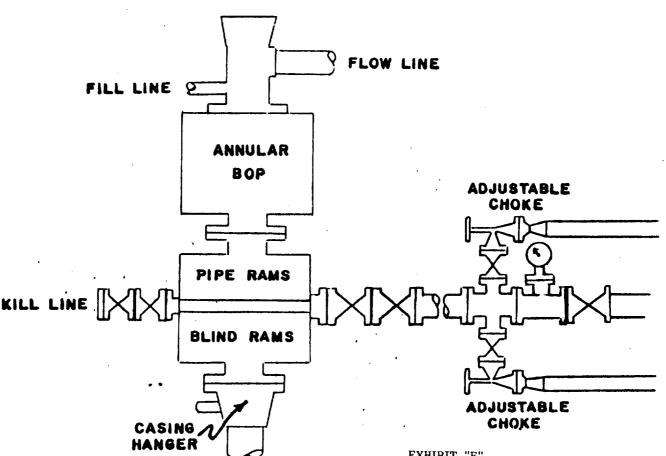


EXHIBIT "E" READ & STEVENS, INC. Hudson Federal, Well No. 8 **BOP Specifications**