•	•	Open c	ogalo No.	1000	_	jein	2/22/36	(2)
Form 3160-3	4.			10000		FORM	APPROVED	
(July 1992)	UNIT	ED S ^{PHO구함}		16990)	OMB NO	D. 1004-0136	
	DEPARTMENT	OF POOLS	ODE	37584	5.		con and serial no	
	BUREAU OF	LAND EFF. DA	TE	11 196	; "			<i>).</i>
APPL	ICATION FOR PE	RMI APENO.	30-00	5-236	/ // - 6.	NM-8490 IF INDIAN, ALLO	TTES OR TRIBE NAM	<u> </u>
1a. TYPE OF WORK			-54.02. 2.47.34	N-2-(L)	` _			
b. TYPE OF WELL	RILL X	DEEPEN 🗌			7.	. UNIT AGREEMEN	T NAME	
WELL A	GAS WELL OTHER		SINGLE ZONE	MULTIF Zone	PLE 8.	FARM OR LEASE NAM	B, WBLL NO.	
2. NAME OF OPERATOR Read & Stev	vens. Inc.		5	05/622-:	3770	Quail F	'ederal	
3. ADDRESS AND THE RPHONE NO					3 / / O g.	API WELL NO.		
P. O. Box 1			ell, NM		10	FIELD AND POO	L. OR WILDCAT	
At surace	Report location clearly and i		ny State requi	rements.*)		Quail Ri	dge Delaw	are
	' FNL & 2310' I	FWL	,	α	11	AND SURVEY OF	OR BLK.	
At proposed prod. zo	Same		1/2	4613)	Sec 3-	T20S-R34E	,
	AND DIRECTION FROM NEARE		FFICE*		12	COUNTY OR PAR		
	SW of Hobbs, NN				I	uea.	New Mex	ico
15. DISTANCE FROM PROI LOCATION TO NEARES PROPERTY OR LEASE	BT	16	3. NO. OF ACRE	S IN LEASE	17. NO. OF A	CRES ASSIGNED WELL		
(Also to nearest dr 18. DISTANCE FROM PRO	lg. unit line, if any) 99	90'	282.	4		O . SS		_
TO NEAREST WELL, OR APPLIED FOR, ON TO	DRILLING, COMPLETED,	860'						
21. ELEVATIONS (Show w	hether DF, RT, GR, etc.)	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	8,40	U		Cotary 22. Approx. Date	WORK WILL START	•
						October	15, 1996	
23.	Р	ROPOSED CASING	AND CEMENT	ING PROGRAI	M CAPITA	N CONTRO	LLED WAT	er e
SIZE OF HOLE	GRADE, SIZE OF CASING	WEIGHT PER FOOT	SETT	ING DEPTH		QUANTITY OF CE	MENT	
17 1/2"	13 3/8"J-55	54.5#	160				te + 200	"C"
7-7/8"	8 5/8"S-80 5 1/2"N-80	32.0# 17.0#	500 840			00 sx **		
· · · , ·	3 1/2 1 00	17.0#	040	J	TTEDACK	. w/500 O	r 975 sx*	
Mud Pr		Mud	Wt. V	is. W	/L Control	APPROVAL	SUBJECT TO	
	600': Fresh water native	mud: 8.4 p	pg 3		W/L control	GENERAL	PENNIBEMENTS	AMO
	0000': Brine mud:	10.0 p		-32 No	W/L control	! SPECIAL S	TIDIII ATIMAC	CALME
2000 8	400': Fresh water mud w	//starch: 8.8 p	pg 32-	·40 W	/L control 15	CC ATTACHED		
BOP Pro	ogram:							
	000 psi wp Shaffer Type I	LWS BOP, with a	5000 psi wr	11" GK Hv	dril. will insta	alled on the 13	/8"	
casing. C	Casing and BOP will be to	sted before drilli	ng out with 1	1". BOP wil	l be tested da	ily as 3000 ps	i	
wp syste	m,					•		
* NOTE	: If severe lost circulation	s is not anacuntor	ed hala will	h.a. ma.dd.	+ 50001 + 7.7		•	
ahead W	TTHOUT setting the 8 5/3	8" casing.	eu, noie win	be reduced a	11 3000 10 / /	7/8" and drill		
** 8 5/8	8": Cement with DV tool	in two stages sta	rting at 3800	' :	et	COETARY	S POTASH	
1st s	tage: Lead 200 sx lite,	ail in w/200 sx "	C".			CULIMIT		
	stage: Lead 500 sx lite of							
N ABOVE SPACE DESCRIE eepen directionally, give pert	BE PROPOSED PROGRAM: If pro tinent data on subsurface locations a	posal is to deepen, give and measured and true v	data on present pertical depths. Gi	productive zone a ve blowout preven	and proposed new ater program, if any	productive zone. I	f proposal is to drill o	or
4.	, ,		Agent f					
SIGNED 160	2912 / 1141	TITLE_	Read &	Stevens	, Inc.	Sept	t. 20, 199	96
(This space for Fede	eral or State office use)							=
, and ogder and a cut	J. would bare wat ,							

- · 1

APPROVAL DATE _ Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. CONDITIONS OF APPROVAL, IF ANY:

*See Instructions On Reverse Side

Energy, Minerals and Natural Resources Departmen

Form C-102 Revised February 10, 1994

Submit to Appropriate District Office

State Lease - 4 Copies Pec Lease - 3 Copies

DISTRICT II P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV P.O. BOX 2088, SANTA PE, N.M. 87504-2088

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

□ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

30-025-33664	Pool Code 37584	NE Lea Pool Name Quail Ridge Delaware	
Property Code	Pr QUAIL	Well Number	
OGRID No. 18917		TEVENS, INC.	Elevation 3663

Surface Location

UL or lot No. S	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
9/LOT 3	3	20 S	34 E		990	NORTH	2310	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres	Joint o	r Infili C	onsolidation	Code Ore	der No.				

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

LOT 4 40.95 ACRES	LOT 3 40.85 ACRES 6 6 6 7 8 8 3660.2	LOT 2 40.75 ACRES NM-84902 Read & Stevens 4.8'	LOT 1 40.65 ACRES	OPERATOR CERTIFICATION I hereby certify the the information contained herein to true and complete to the best of my incubolige and belief.
2310'	3658.2' 36	1.11		Signature of Market
				George R. Smith, agent for Printed Name Read & Stevens, Inc.
				September 19, 1996
		!		SURVEYOR CERTIFICATION
				I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervison, and that the same is true and correct to the best of my belief.
				SEPTEMBER 13, 1996 Date Surveyed DMCC Signature in Sept. 191
				Professional Surveyor (MINISTRUMENT & 18-96) (96-1-180)
				Certificate No. JOHN W. SWIST 676 GRANDED EIDSON 3239 GARYPHISON 1264

APPLICATION FOR DRILLING READ & STEVENS, INC.

Quail Federal, Well No. 3

990' FNL & 2310' FWL, Sec. 3-T20S-R34E

Lease No.: NM-84902 (Development Well)

In conjunction with Form 3160-3, Application for Permit to Drill subject well, Read & Stevens, Inc. submits the following items of pertinent information in accordance with BLM requirements:

- 1. The geologic surface formation is recent Permian with quaternary alluvium and other surficial deposits.
- 2.. The estimated tops of geologic markers are as follows:

Rustler	1,580'	7 Rivers	8,250'
Top of Salt	1,770'	Delaware	5.200'
Base of Salt	3,120'	Bone Spring	8,200'
Yates	3,200'	T.D.	8,400'

3. The estimated depths at which water, oil or gas formations are anticipated to be encountered:

Water: Surface water in the Triassic between 80' - 230'.

Oil: Possible in the Delaware below 5500'.

Gas: None expected.

- 4. Proposed Casing Program: See Form 3160-3.
- 5. Proposed Control Equipment: See Form 3160-3 and Exhibit "E".
- 6. Mud Program: See Form 3160-3.
- 7. Auxiliary Equipment: Blowout Preventer, gas detector, Kelly cock, pit level monitor, flow sensors and stabbing valve.
- 8. Testing, Logging, and Coring Program:

Drill Stem Tests: None unless warranted.

Logging: T.D. to 5000':

G/R, CNL-FDC, DLL, MSFL

T.D. to surface:

G/R, neutron

Coring: None planned.

- 9. No abnormal pressures or temperatures are anticipated. In the event abnormal pressures are encountered the proposed mud program will be modified to increase the mud weight. Estimated BHP = 3300 psi (evac. hole) with temperature of 140° .
- 10. H₂S: None expected. None in previously drilled wells, but a Drilling Operations Plan, Exhibit "F", is being submitted to cover this this contingency.
- 11. Anticipated starting date: October 15, 1996.
 Anticipated completion of drilling operations: Approx. 3 weeks.

MULTI POINT SURFACE USE AND OPERATIONS PLAN

READ & STEVENS, INC.
Quail Federal, Well No. 3
990' FNL & 2310' FWL, Sec. 3-T20S-R34E
Lea County, New Mexico
Lease No.: NM-84902
(Development Well)

This plan is submitted with the Application for Permit to Drill the above described well. The purpose of the plan is to describe the location of the proposed well, the proposed construction activities and operations plan, to be followed in rehabilitating the surface environmental effects associated with the operations.

1. EXISTING ROADS:

- A. Exhibit "A" is a portion of a USGS/BLM Topo map showing the location of the proposed well as staked. The well site location is approximately 51 road miles northeast of Carlsbad, New Mexico or 30 road miles southwest of Hobbs, NM. Traveling east from Carlsbad there will be approximately 48 miles of paved highway and 1.0 mile of gravel ranch/oilfield road.
- B. Directions: Travel east from Carlsbad, NM on U.S. Highway 62/180 for approximately 42 miles; turn south .3 mile east of MM 78 at a cattle guard with a steel unlocked gate. Continue south for .4 mile, then turn east for 1.0 mile to the start of the proposed access road on the left (east) side of the road. The proposed access road will run northeast for approximately 1000 feet to the southwest corner of the proposed location..

2. PLANNED ACCESS ROAD:

- A. Length and Width: The proposed of access road will be constructed to a width of 12 feet and will be approximately 1000 feet in length. The proposed access road is color coded red on Exhibit "B".
- B. Construction: The proposed access road will be constructed by grading and topping with compacted caliche and will be properly drained.
- C. Turnouts: None required.
- D. Culverts: None required.
- E. Cuts and Fills: Will require leveling of 2 to 3 foot sand dunes and deflation basins.
- F. Gates, Cattle guards: None required.
- G. Off Lease R/W: The existing off lease R/W No. NM-70565, as amended, will cover the off lease portion of the existing access road on Federal surface back to US Highway 62/180. See Exhibit "B".

3. LOCATION OF EXISTING WELLS:

A.. Existing wells within a two mile radius are shown on Exhibit "C".

4. LOCATION OF EXISTING AND/OR PROPOSED FACILITIES;

- A. There are no oil production facilities on the lease at this time.
- B. If the well proves to be commercial, the necessary production facilities, gas production-process equipment will be installed on the drilling pad, with a 2" SDR 11 poly pipe surface flow line will run parallel to the existing access roads to the Quail Fed., Well No. 1 pad 2310' FNL & 1980' FEL Sec. 3-T20S-R34E.

5. LOCATION AND TYPE OF WATER SUPPLY:

A. It is planned to drill the proposed well with fresh water that will be obtained from private or commercial sources and will be transported over the existing access roads.

6. SOURCE OF CONSTRUCTION MATERIALS:

A. Caliche for surfacing the proposed access road and well site pad will be obtained from an approved Federal pit in the SW¼SW¼ of Section 26-T19S-R34E. No surface materials will be disturbed except those necessary for actual grading and leveling of the drill site and access road.

7. METHODS OF HANDLING WASTE DISPOSAL:

- A. Drill cuttings will be disposed of in the reserve pits.
- B. Drilling fluids will be allowed to evaporate in the reserve pits until the its are dry.
- C. All pits will be fenced with normal fencing materials to prevent livestock and wildlife from entering the area.
- D. Water produced during operations will be collected in tanks until hauled to an approved disposal system, or a separate disposal application will be submitted to the BLM for approval.
- E. Oil produced during operations will be stored in tanks until sold.
- F. Current laws and regulations pertaining to the disposal of human waste will be complied with.
- G. Trash, waste paper, garbage and junk will be contained in trash bins to prevent scattering and will be removed for deposit in an approved sanitary land fill within 30 days after finishing drilling and/or completion operations.

8. ANCILLARY FACILITIES:

A. None required.

9. WELL SITE LAYOUT:

- A. Exhibit "D" shows the relative location and dimensions of the well pad, reserve pits, and major rig components. The pad and pit area has been staked and flagged, 400' X 400'.
- B. Mat Size: 200' X 300', plus 100' X 150' reserve pits. The pits will be on the east.
- C. Cut & Fill: There will be a leveling of 3 to 5 foot sand dunes and deflation basins.
- D. The surface will be topped with compacted caliche and the reserve pits will be plastic lined.

10. PLANS FOR RESTORATION OF THE SURFACE:

- A. After completion of drilling and/or completion operations, all equipment and other material not needed for operations will be removed. Pits will be filled and the location cleaned of all trash and junk to leave the well site in an aesthetically pleasing a condition as possible
- B. Any unguarded pits containing fluids will be fenced and screened until they are filled.
- C. If the proposed well is non-productive, all rehabilitation and/or vegetation requirements of the Bureau of Land Management will be complied with and will be accomplished as expeditiously as possible. All pits will be filled and leveled as soon as they are dry enough to work after abandonment.

11. OTHER INFORMATION:

- A. Topography: The proposed well site and access road is located in an area of sand dunes and deflation basins which is part of the Querecho Plains. The location has a slight southwesterly slope of .8% from an elevation of 3663'.
- B. Soil: The topsoil at the well site is a light yellowish-brown fine to course sand of the Pyote soils and Dune land Series.
- C. Flora and Fauna: The vegetation cover is a fair grass cover of three-awn, sand and spike dropseed, grama bristle grass and other miscellaneous native grasses along with plants of mesquite, yucca, shinnery oak brush, sage, sunflowers, broomweed, cacti and miscellaneous weeds and wildflowers. The wildlife consists of rabbits, coyotes, rattlesnakes, lizards, dove, quail and other wildlife typical of the semi-arid desert land.
- D. Ponds and Streams: None in area.
- E. Residences and Other Structures: None in the immediate area, except oil production facilities.
- F. Land Use: Cattle grazing.

Read & Stevens, Inc. Quail Federal, Well No. 3 Page 4

11. OTHER INFORMATION;

cont.....

- G.. Surface Ownership: The proposed well site and access road are on Federal surface.
- H. There is no evidence of archaeological, historical or cultural sites on the proposed 400' X 400 site and access road. An archaeological survey has been conducted by Archaeological Survey Consultants, P. O. Box D, Roswell, NM 88202, and their report will be submitted to the appropriate government agencies.

12. OPERATOR'S REPRESENTATIVE:

A. The field representative responsible for assuring compliance with the approved surface use and operations plan is as follows:

Carl Little Read & Stevens, Inc. P.O. Box 1719 Lovington, NM 88261

Roswell Office Phone: (505) 622-3770 Lovington Office Phone: (505) 392-8777 Cellular Phone: (505) 626-7421


3. CERTIFICATION:


I hereby certify that I have inspected the proposed drill site and access route; that I am familiar with the conditions which presently exist; that the statements made in the plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by Read & Stevens, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

September 20 1996


George R. Smith

Agent for: Read & Stevens, Inc.

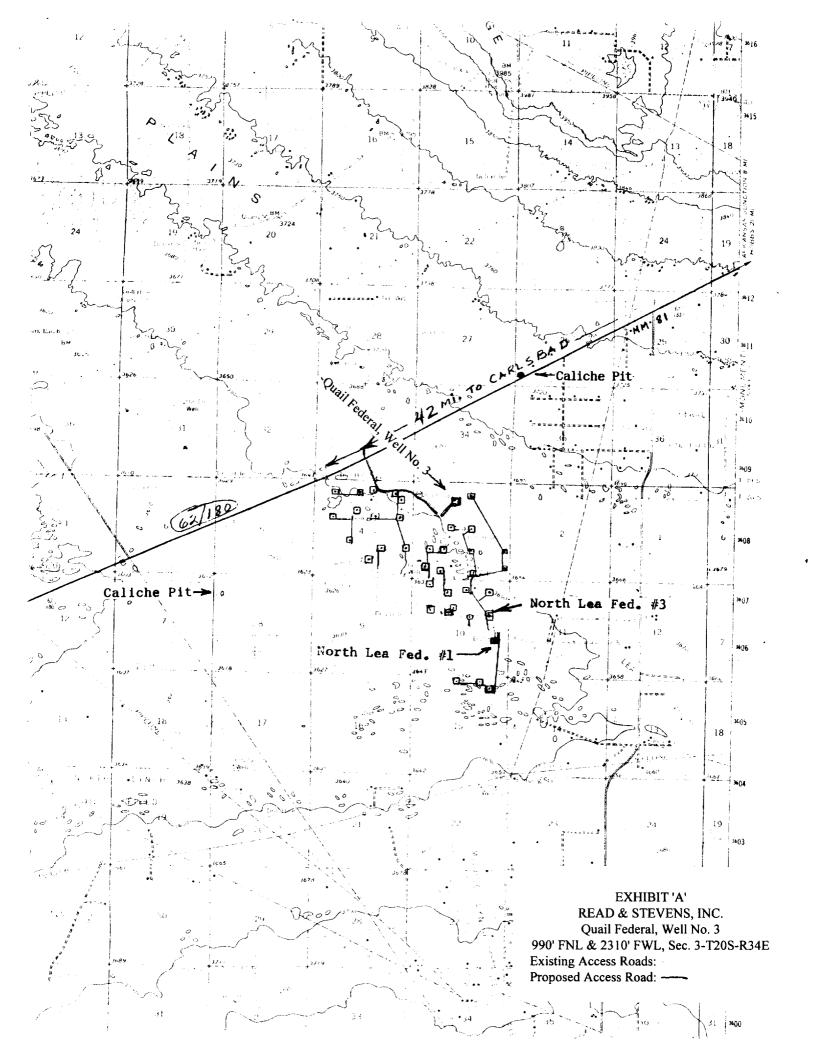

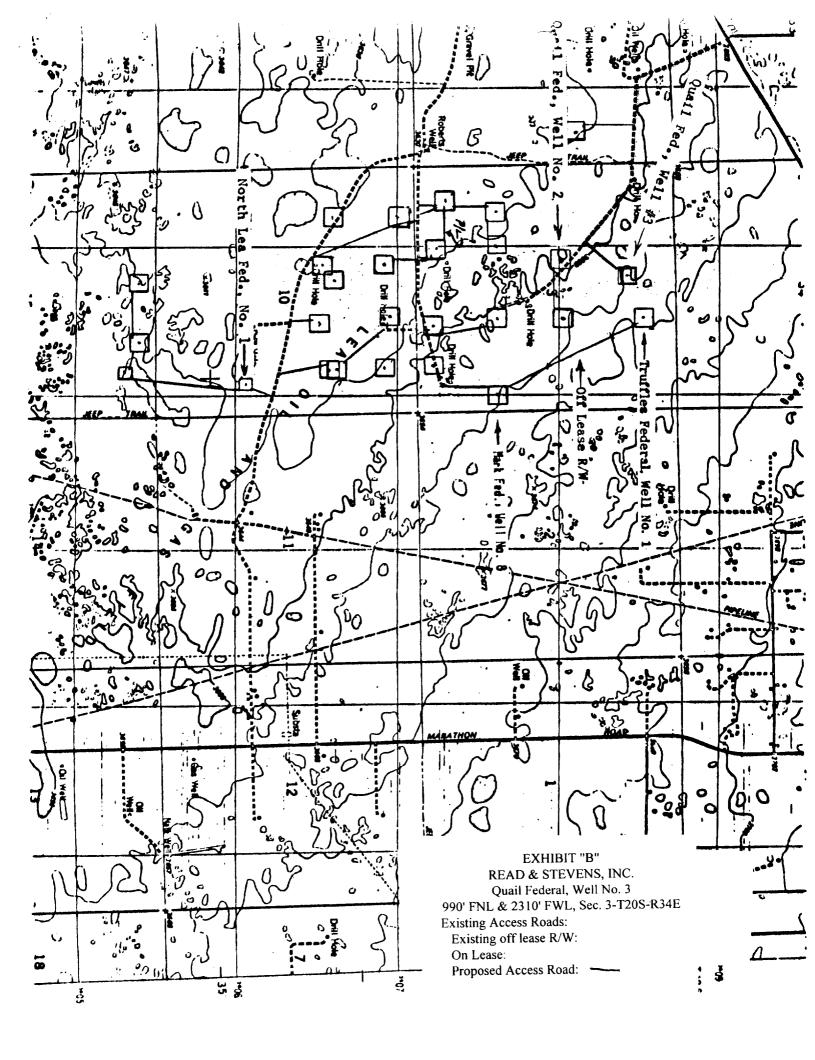

MITCHELL ENER.	92192 95 00	198400 Mescelere Mescelere Transcription Transcr	Mers colere Despo toni Mers Dist S Mers Dist S Tonilla Son	F1125E, S.C.	4761 DEVON ENER. ()	PER
(OPER.)	To 4810 p. J. S. Theoremotel chevron A 1 95 HBC	Se s to El Paso, Frod stal to	(Deven Ener.) (El Pase Productal)	Devention (Sinclair)	Gu n Z bang Peterson, PT Balog, ctol	ting Privates, P. HSP 57265 Superior 6647
en 179655 jun on 1711 - 5.10C	Chas E & Mark Smith, 5	Madien Dil, et al Diff	Me-Tes S/R H 8/J (Sinctor) - 0 (680.7 Arrows) - 0 (Prod clairy) Addition (MA/A) Prod clairy) Addition (MA/A) Prod clairy) Addition (MA/A) Prod clairy)	Deven there are to the state of	
11.10	Union 12 Frequent 12 to 80 mg # said 1 to 10 mg	Description of the section of the se	* Central Alecchington May To	Julie apid Fool. TO 5866 DIA 7 57 Sun Dry (Christop) The Sun Control (Christop) The	(a) (a) (b) (b) (c)	
HGS PORTER STOCK (S. 1888)	Linian Hard Kershall	11.5	3 46 Alegoalera - First. 24165 1/ Same 1/ Same	Sun Strate Frod you O' 1 57 57 1 1 57 1 1 1 1 1 1 1 1 1 1 1 1	District On Bu	SLO MAD
K&S 1009 Iran	L6 2405 160 2' Majjor 425 00	Barbara 34 16 1496 1496 1496 1496 1496	Dook Eart. 16: 607 Helybur Later. Dynnahl.	J' MG FL.N	MAELAN (El Paso Na) Plante Digate DIR . ** 34 Minister DIR . ** 34 Minister DIR . **	در ادر اده شماست
Pro-Fed. LAGUNA OPEP UNIT UNION (OPER)	Deven East. 1 B.P. 1 Spring Post. (c) Mailer Oil	7. 1141 31 99 9	SAV MA	Quail Federal, Well		•SI !
	Store to assi	U.S. L.B. Hughes Los	Store Store ALDIA: 21 40 04A stooths et 40 09 Ac) Malestel Cox E. Hamon, et al	O TO COLOR	Vo 3 THE WILL PARK	Side Co
(ME) Chambo	Ag406 Feb 188	Vinion 2.3 Mill Cor & Homan H B P No. 2 Mill Cor & Homan H B P No. 2 Mill Corner Park No. 2	Hudson & Lewise 1000 Hudson & Lewise 100 Hudson &		8 S. Maragan - 9442 Stoffer U.S. 19420	3 MA
6 BTA	in section is	As405 L.B. Hugher etc. Collins TA E. Ware T/A Cleary Pet M4 Cleary Pet M4	(Cox & Homen, stell) Marchisen March	(Cox Hemon, clos)	Seess A Street	
PER VERSE POS VERSE POS VERSE POS VERSE Stare	U S Snyder Pet, etal	distantial	U.S.	AVE - CTIPLE	(CO) med and Simple (S)	Spectrom?
Meridian 1940 a S Chang Pet, No 1982 - 173 b B	Somen Rest Matador	STORY I Story Stor	Con & Homon, stol	wa Cha Walgarian Barrell Barre	6993	0631
of positions Pgt	HBC 86930 4409 WZ Grace Pet Grace Pet Grace Pet 1 92 HBP 13184	S Ji 52 (Hamproll)	Taxos (A) 18 2000	Con F Homen 9 (Gind In 1987) (Isrinor, 12) (Gind In 1987) (Isrinor, 12) (Gind In 1987) (Isrinor, 12) (Gind In 1987) (ATMIT Union)	Word I See To Table	13 Ly 0
(A R Co) Military	Grace Pet.	U.S. M. North Amith, S. U.S.	U. S .	U.S.R. 5 8997	2.40	Tenas Tosser
Trill	Andrew Tr. 4	TEAS VATES U	OXY Sun H86 18276	H.B.P. Hamp-4364-	Read & Stevens Lead & Roun	(wasterned) Affection
Ann Y NGS		Tr. Maria Processor Sporger Life Ser	OXY 17	16 46°	34 Similar 7 1 000 000	Anadorto (C. Rond 98 C. Rond 98 C
The same of the sa	Trisi Pada Fod Bobb Trisi Bracelys For Work Andrews Sun Collect State St	1034-95 - Blas Nolle (Landbridge Lewert - Prod	Wallen Fred Mr. Donald Jessett Wallen Fred Mr. Donald Jessett Wallen Fred Mr. Donald Jessett La Company Company	70 1823660 1 E 136 1	U.SI MI	9394). Mai
44 (70340) Londing 1 15030	TOTAL ACTUAL PROPERTY AND ACTUAL PROPERTY ACTU		o' Wellon Prod (OXY) TASSA O (Crise Service) Culbertson Mgmt) Wallon Prod 12 3 10 Culbertson Mgmt) Wallen Prod Wallen Prod Wallen Prod	P. R. Bass, atel VeresCo.	I P. HEM SOME TO ME	n e_sugg
To be a family of the second o	Conoco Tymes Base 2 150 24 reserve 3	Andershap Cultury 1991 Man	20	21 (M.)	of Breed 22 Grantal	000 136 Um.h.b.
7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	24 TO FIND (R Cat Sort Com	Getty Water Mobil 8-1-76 Fee HBP 063783 U.S. 1231	Wisen	Service Description of the control o	Annuan
Mitchell Ener. 11 1 54 62926 120 92 Marcele 14	Choco Tros	C College (Mare 1 Williamol College TO 9547 TO 95	Ches Ser Ties Training To Socies Goods Goods Goods Goods	Walen Fred Carper Walen Fred Carper Singleton Union Singleton 19 131 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Octoo East, 22 12 12 12 12 12 12 12 12 12 12 12 12	- 100 m
I F WAY "	7 dans 7 1/157 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	WILBOX	K. Lotes bar aton			•
Jano-Fed, 3470 1-24-00 Michigator. 724-0	Yetes Pet Treat-Feet To bes	67874 51198 © 703000 004775	15 th	READ & ST	BIT "C" EVENS, INC. al, Well No. 3	10 3 722 1
Cinco of America, K	3. Section 20		Weeth Drig. Morstell 6 Lee-Er Winston T03386 7 1 98 BARB H 87 VA 363 160 25	990' FNL & 2310' FV	VL, Sec. 3-T20S-R34E ag Wells	Francisco Constitution Constitu
- ← ⊕ 120 E	769509 V:3557	MAN F MIWITYNCI	OFEP UT 22-MILLION	5572 120 1115	34 163761	
•		·	•	,	• • • • • •	- , -

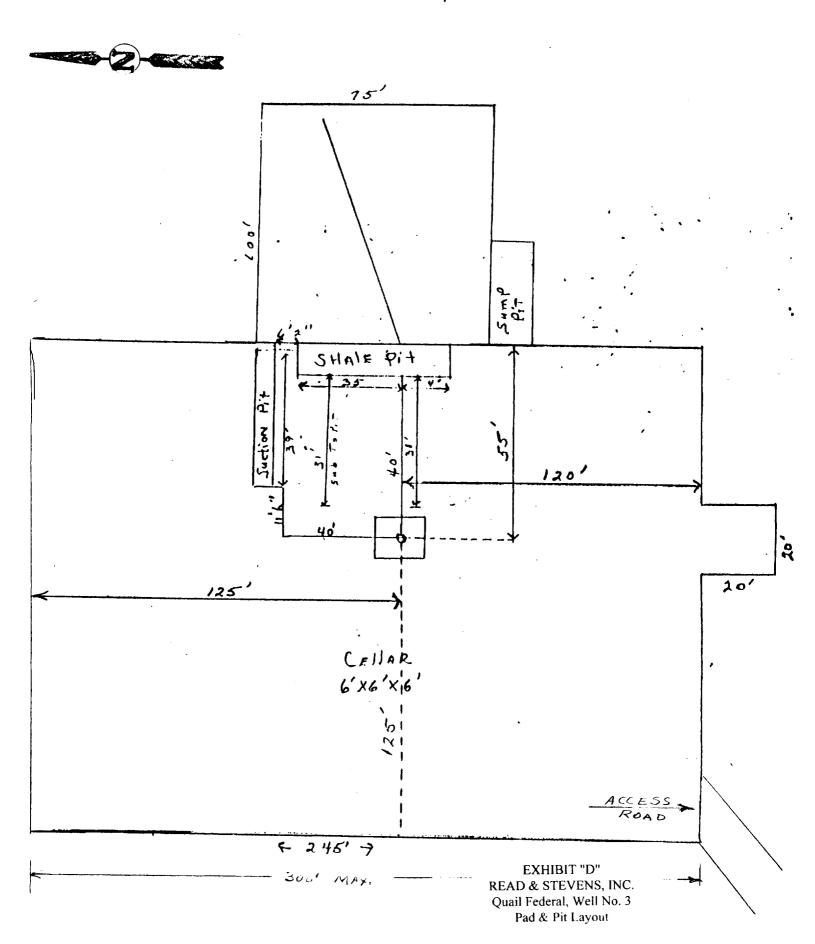



DRILLING CO., INC. - DIL WELL DRILLING CONTRACTORS

P. O. BOX 1498 ROSWELL, NEW MEXICO 88202-1498 808/623-5070 \$05/746-2719 ROSWELL, NM ARTESIA, NM

RIG # I

BLOWOUT PREVENTOR ARRANGEMENT

II" SHAFFER TYPE LWS, 5000 psi WP
II" GK HYDRIL, 5000 psi WP
80 GALLON, 4 STATION PAYNE ACCUMULATOR
3000 psi WP CHOKE MANIFOLD

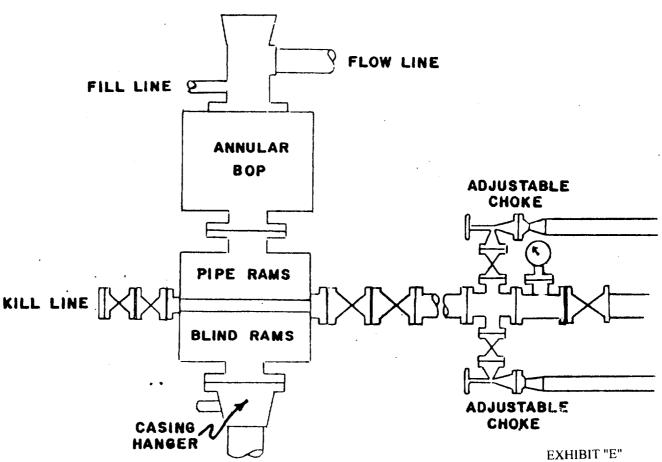


EXHIBIT "E"
READ & STEVENS, INC.
Quail Federal, Well No. 3
BOP Specifications

EXHIBIT "F"

READ & STEVENS, INC.

H₂S DRILLING OPERATIONS PLAN

For: Quail Federal, Well No. 3 990' FNL & 2310' FWL, Sec. 3-T20-R34E

I. HYDROGEN SULFIDE TRAINING

All key personnel whether regularly assigned, contracted or employed on an unscheduled basis will receive or represent that they have received training in accordance with the general training requirements outlined in the API RP49 for safe drilling of wells containing hydrogen sulfide, Section 2.

In addition, supervisory personnel will be trained in the following areas:

- 1. The corrective action and shut-in procedures when drilling or reworking a well, and blowout prevention in well control procedures.
- 2. The contents and requirements of the H₂S drilling operations plan.

II. H2S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested and operational when drilling reaches a depth of 500' above the first zone containing or reasonably expected to contain 100 ppm or more hydrogen sulfide.

- 1. Well Control Equipment:
 - a. Flare line with a continuous pilot.
 - b. Choke manifold with a minimum of one choke.
 - c Blind rams and pipe rams to accommodate all drill pipe sizes with a properly sized closing unit.
 - d. Auxiliary equipment to include and annular preventer and a rotating head.

2. Protective Equipment:

- a. Proper protective breathing apparatus shall be readily accessible to all essential personnel on the drill site
- 3. H₂S and Monitoring Equipment:
 - a. Three portable H₂S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens.
- 4. Visual Warning Systems:
 - a. Wind direction indicators as shown on well site diagram.
 - b. Caution/Danger signs shall be posted on roads providing direct access to location.

Read & Stevens, Inc. Quail Federal, Well No. 3 Page 2

5. Mud Program:

a. The mud program has been designed to minimize the volume of H₂S circulated to the surface. Proper mud weight and safe drilling practices will minimize hazards when penetrating H₂S bearing zones.

6. Communications:

- a. Radio communications are available in company vehicles and at the rig site.
- b. Land line "telephone" communications at field office.

7. Well Testing:

a. Drillstem testing will be performed with a minimum number of personnel in the immediate vicinity which are necessary to safely and adequately conduct the test. When drillstem testing intervals known to or reasonably expected to contain 100 ppm or more H₂S, the drillstem test will be conducted during daylight hours and formation fluids will not be flowed to the surface.