


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

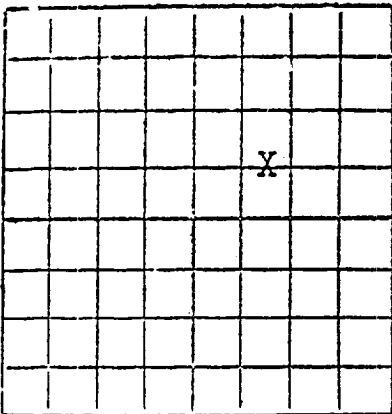

AREA 640 ACRES
LOCATE WELL CORRECTLY

TEXACO Inc. C. H. Weir "B"
(Company or Operator) (Lease)
Well No. 5, in SW 1/4 of NE 1/4, of Sec. 11, T. 20-S, R. 37-E, NMPM.
Skaggs (Glorieta) Skaggs (Drinkard) Pool, Lea County.
Well is 1650 Blinebry (Gas) East line and 1980 feet from North line
of Section 11. If State Land the Oil and Gas Lease No. is No
Drilling Commenced November 30, 1961. Drilling was Completed January 7, 1962
Name of Drilling Contractor Rowan Drilling Company, Inc.
Address P. O. Box 1873 - Midland, Texas
Elevation above sea level at Top of Tubing Head 3610' (D.F.) The information given is to be kept confidential until
June, 1962

OIL SANDS OR ZONES

See Attached Sheet
No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to
Drilled with rotary tools and no water sands tested.

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8-5/8"	24.00	New	1419'	Howco	None	None	Surface
5-1/2"	14.00	New	6924'	Howco	None	See attached	Production

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHOLE SET	NO. BAGS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	1429'	600	Howco		
6-1/4"	5-1/2"	6937'	1050	Howco		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

See Attached Sheet
Result of Production Stimulation See attached sheet
Depth Cleaned Out 6937'
FBI 6935'

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 6937 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing February 18, 1962
OIL WELL: The production during the first 24 hours was 30 barrels of liquid of which 100 % was oil; % was emulsion; % water; and % was sediment. A.P.I. Gravity 42.9
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	1400'	T. Devonian	T. Ojo Alamo
T. Salt	1495'	T. Silurian	T. Kirtland-Fruitland
B. Salt	2538'	T. Montoya	T. Farmington
T. Yates	2603'	T. Simpson	T. Pictured Cliffs
T. 7 Rivers		T. McKee	T. Menefee
T. Queen		T. Ellenburger	T. Point Lookout
T. Grayburg		T. Gr. Wash	T. Mancos
T. San Andres		T. Granite	T. Dakota
T. Glorieta	5247'	T.	T. Morrison
T. Blinberry	5812'	T.	T. Penn
T. Drinkard	6805'	T.	T.
T. Tubbs	6405'	T.	T.
T. Abo		T.	T.
T. Penn		T.	T.
T. Miss		T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	473	473	Caliche	DEVIATION RECORD			
473	1250	777	Redbed	DEPTH			DEGREES OFF
1250	1852	602	Anhy	305			3/4
1852	2546	694	Anhy & Salt	1295			1/4
2546	3085	539	Anhy	1785			3/4
3085	3216	131	Anhy & Gyp	2023			1/2
3216	3332	116	Lime	2930			3/4
3332	3465	133	Anhy	3176			1
3465	3554	89	Lime & Anhy	3760			3/4
3554	3811	257	Lime & Gyp	4140			3/4
3811	4389	578	Lime	4827			3
4389	4509	120	Lime & Sand	5140			3
4509	4898	389	Lime	5868			2-1/4
4898	4991	93	Sand & Lime	6025			2
4991	5711	720	Lime	6840			1
5711	5753	42	Dolomite	6937			1
5753	5997	244	Lime	ESTIMATE No. 5740			
5997	6059	62	Lime & Shale	5 - NMOCC			
6059	6652	593	Lime	1 - Division			
6652	6842	190	Lime & Sand	1 - Field			
6842	6937	95	Lime	1 - File			
Total Depth	6937'						
PBTD	6935'						
All measurements from rotary table or 10' above ground level.							

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator TEXACO Inc. Address Box 728 - Hobbs, New Mexico
Name H. N. Wade Position or Title Asst. Dist. Superintendent
March 16, 1962 (Date)