

Current Wellbore Diagram

Britt B No. 10

New Mexico Federal Unit

GLE: 3555'

KBE: 3561'

Surface Casing

13 3/8", 48#, H-40 @ 341'

TOC @ Surface

Production Tubing

2 3/8", 4.7#, J-55 with SN at 3278'

Yates Perfs: 2628', 36', 42', 50', 68', 77',
91', 2700', 08', 22', 29', 42', 68', 74', 81',
2802', 12', 18', 41', 49', 61', 64', & 2885'
with 1 JSPF

Note: 44 bbl cmt sqzd in 7"x9 5/8" csg
annulus thru sqz perfs at 3100' prior to
Eumont completion.

Intermediate Casing

9 5/8", 36#, H-40 @ 3999'

TOC @ Surface

Production Casing


7", 20 & 23#, J-55 @ 6979'

TOC @ 4175'

Production Liner

5 1/2", 17#, K-55 From 5475'-7743'

Cemented with 245 sx

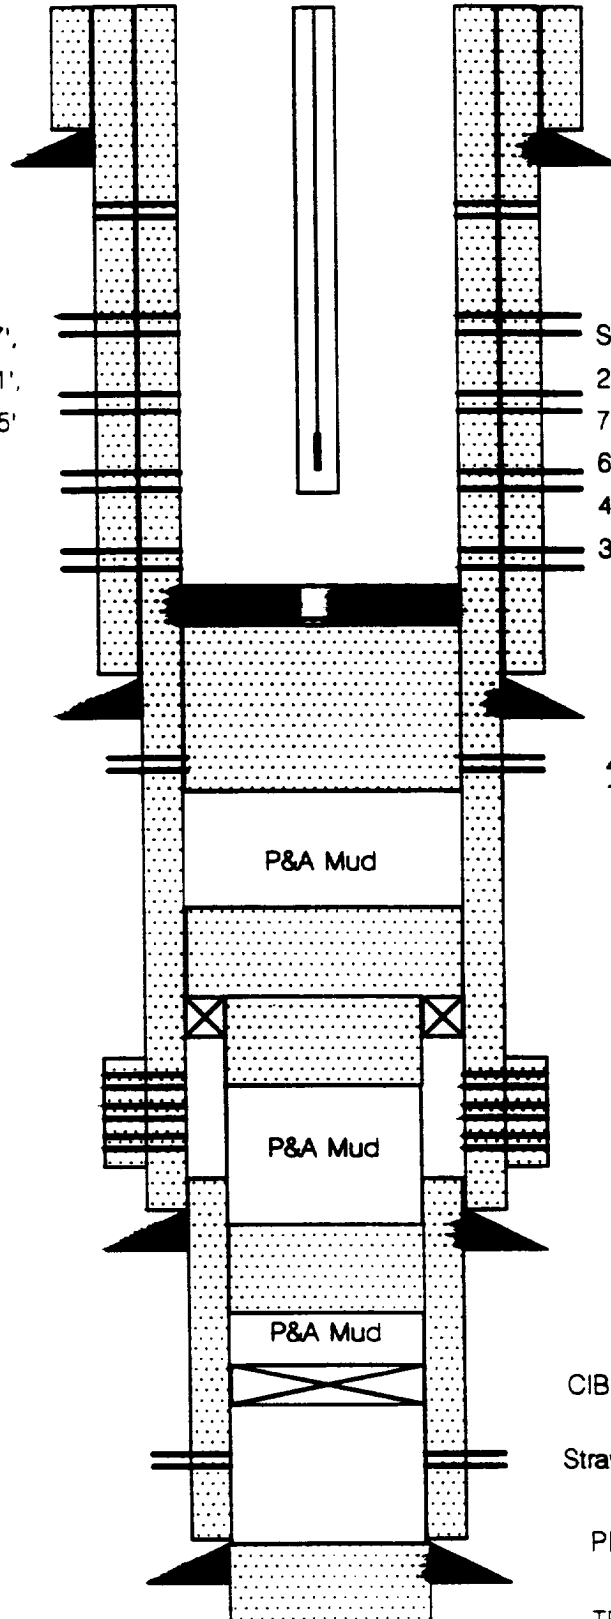

Csg Leak at 1600'
Sqzd with 25 sx cmt

Seven Rivers Perfs: 2894', 98',
2920', 28', 36', 43', 56', 61', 69',
79', 85', 3020', 28', 42', 46', 56',
63', 69', 78', 81', 88', 3117', 31',
43', 63', 72', 80', 3200', 06', 36',
39', & 3262' with 1 JSPF

Cmt Ret at 3810'

4 JSPF at 4052'
194 bbl cmt sqzd

25 SX Cmt Plug at 5416'

Blinbry Perfs: 5612'-5898'
Tubb Perfs: 6288'-6534'
Drinkard Perfs: 6642'-6851'

25 SX Cmt Plug at 6770'

CIBP @ 7680' with 2 sx cmt on top

Strawn Perfs: 7701'-7705' GI

PBTD: 3900'

TD: 7790'

Proposed Wellbore Diagram

Britt B No. 10

New Mexico Federal Unit

P&A Marker

GLE: 3555'

KBE: 3561'

Surface Casing

13 3/8", 48#, H-40 @ 341'

TOC @ Surface

Csg Leak at 1600'

Sqzd with 25 sx cmt

Yates Perfs: 2628', 36', 42', 50', 68', 77', 91', 2700', 08', 22', 29', 42', 68', 74', 81', 2802', 12', 18', 41', 49', 61', 64', & 2885' with 1 JSPF

Note: 44 bbl cmt sqzd in 7"x9 5/8" csg annulus thru sqz perfs at 3100' prior to Eumont completion.

Intermediate Casing

9 5/8", 36#, H-40 @ 3999'

TOC @ Surface

Production Casing


7", 20 & 23#, J-55 @ 6979'

TOC @ 4175'

Production Liner

5 1/2", 17#, K-55 From 5475'-7743'

Cemented with 245 sx

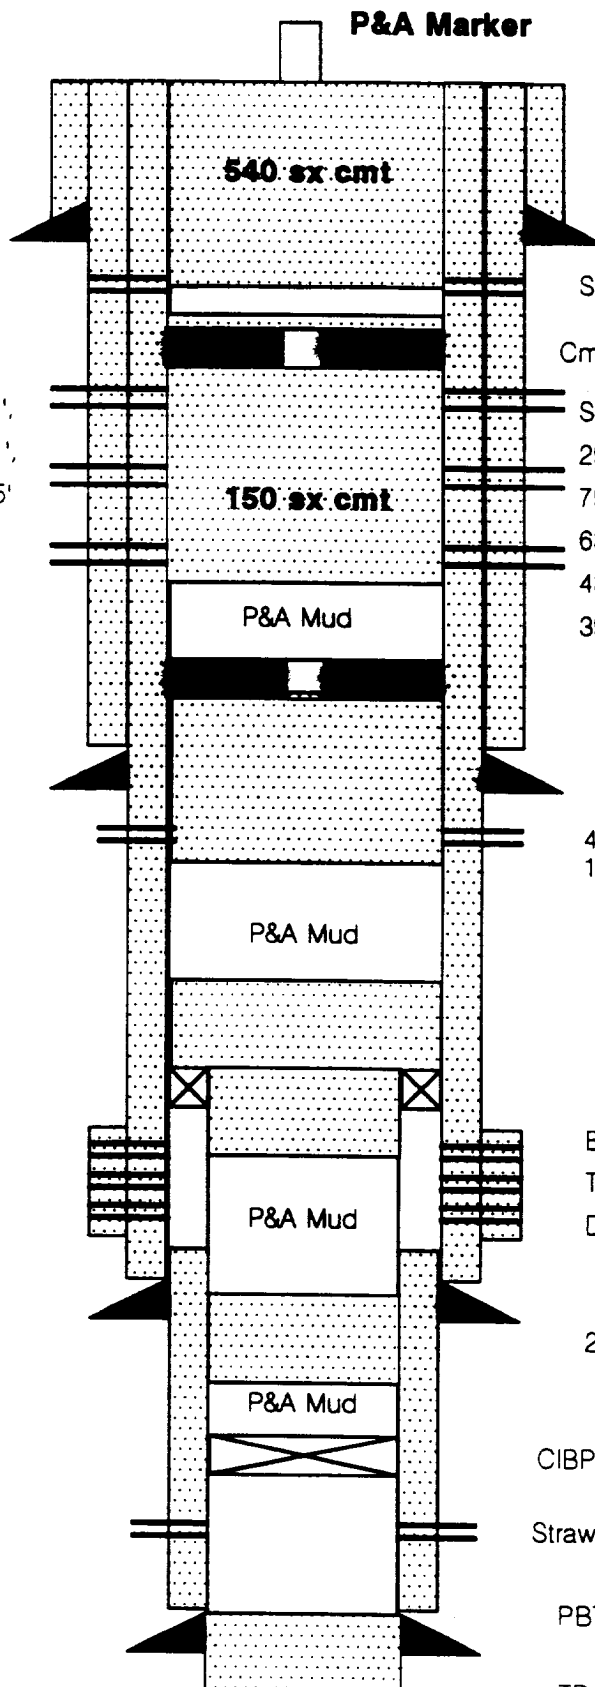

Squeeze Perfs at 1600'

Cmt Ret at 2600' w/ 25 sx cmt cap

Seven Rivers Perfs: 2894', 98', 2920', 28', 36', 43', 56', 61', 69', 79', 85', 3020', 28', 42', 46', 56', 63', 69', 78', 81', 88', 3117', 31', 43', 63', 72', 80', 3200', 06', 36', 39', & 3262' with 1 JSPF

Cmt Ret at 3810'

4 JSPF at 4052'
194 bbl cmt sqzd

25 SX Cmt Plug at 5416'

Blincbry Perfs: 5612'-5898'
Tubb Perfs: 6288'-6534'
Drinkard Perfs: 6642'-6851'

25 SX Cmt Plug at 6770'

CIBP @ 7680' with 2 sx cmt on top

Strawn Perfs: 7701'-7705' GI

PBTD: 3900'

TD: 7790'

Attachment III

Date: 02-03-94

By: Cary Bounds