

PROPOSED WELLBORE DIAGRAM

BRITT B NO. 10

NMFU

GLE: 3555'

KBE: 3561'

SURFACE CASING

13 3/8", 48#, H-40 @ 341'
TOC @ SURF

INTERMEDIATE CASING

9 5/8", 36#, H-40 @ 3999'
TOC @ SURF


PRODUCTION CASING

7", 20 & 23#, J-55 @ 6979'
TOC @ 4175', SQZD TO SURF

PRODUCTION LINER

5 1/2", 17#, K-55 FJ FROM
5475'-7743'
CMT W/ 245 SX

BY: CARY BOUNDS

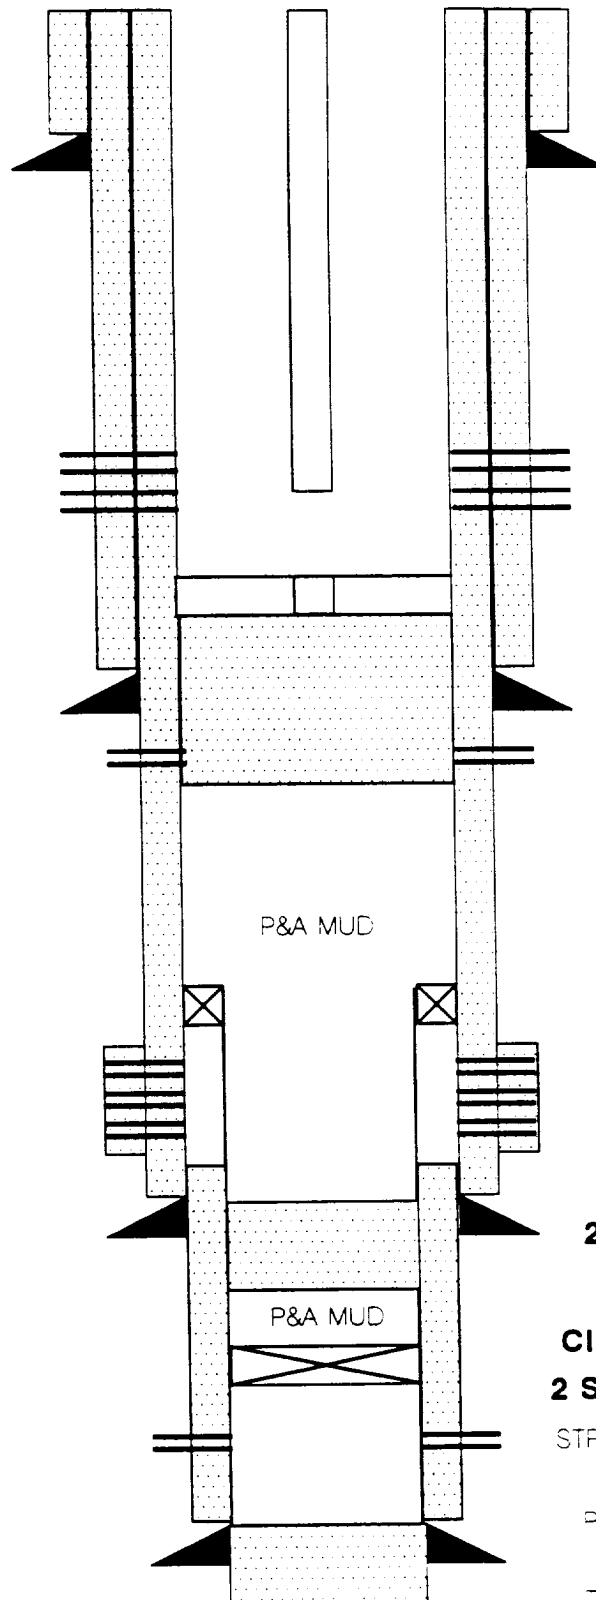

EUMONT PERFS

2640'-3260' GI

PERFS @ 4100' TO CIRC 630 SX CMT

SQUEEZED PERFS

BLINEBRY: 5612'-5898'

TUBB: 6288'-6534'

DRINKARD: 6642'-6851'

25 SX CMT PLUG:

6864'7194'

CIBP @ 7680' W/ 2 SX CMT ON TOP

STRAWN PERFS: 7701'-7705' G

PSTD: 3900'

TD: 7790'

DATE: 06-02-97

RECEIVED

JUN 24 1993

ASST. DIR. HOBBS
OFFICE