

CURRENT WELLBORE DIAGRAM

BRITT B NO. 10

NMFU

GLE. 3555'

KBE. 3561'

SURFACE CASING

13 3/8", 48#, H-40 @ 341'
TOC @ SURF

INTERMEDIATE CASING

9 5/8", 36#, H-40 @ 3999'
TOC @ SURF


PRODUCTION CASING

7", 20 & 23#, J-55 @ 6979'
TOC @ 4175'

PRODUCTION LINER

5 1/2", 17#, K-55 FJ FROM
5475'-7743'
CMT W/ 245 SX

BY: CARY BOUNDS

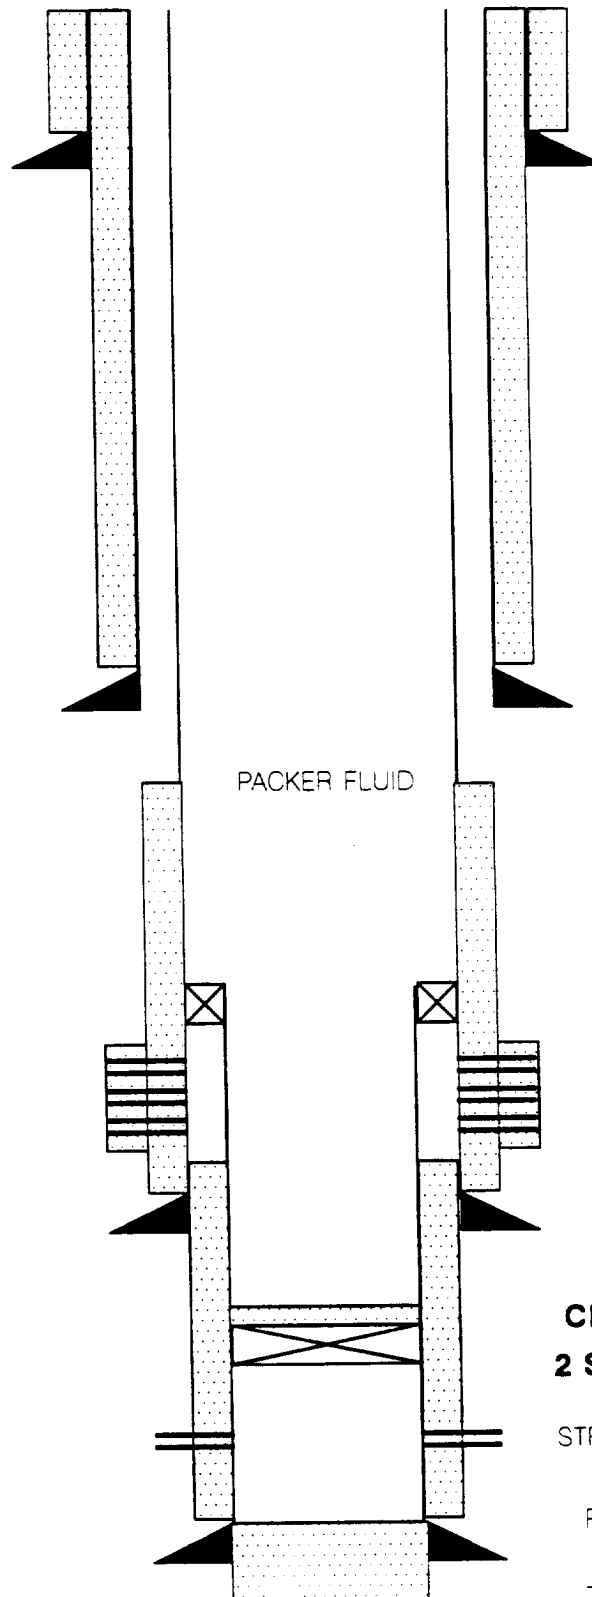

PACKER FLUID

SQUEEZED PERFS

BLINEBRY: 5612'-5898'
TUBB: 6288'-6534'
DRINKARD: 6642'-6851'

**CIBP @ 7680' W/
2 SX CMT ON TOP**

STRAWN PERFS 7701'-7705' G

PBTD: 3900'

TD: 7790'

DATE: 06-02-91

RECEIVED

JUN 24 1993

OCD HOBBS
OFFICE