


T. SALT - 1366'

B. SALT - 2340'

Sec 16, T-20S, R-37E

2210' FNL & 230' FNL

ELEVATION - 3539' D.F.

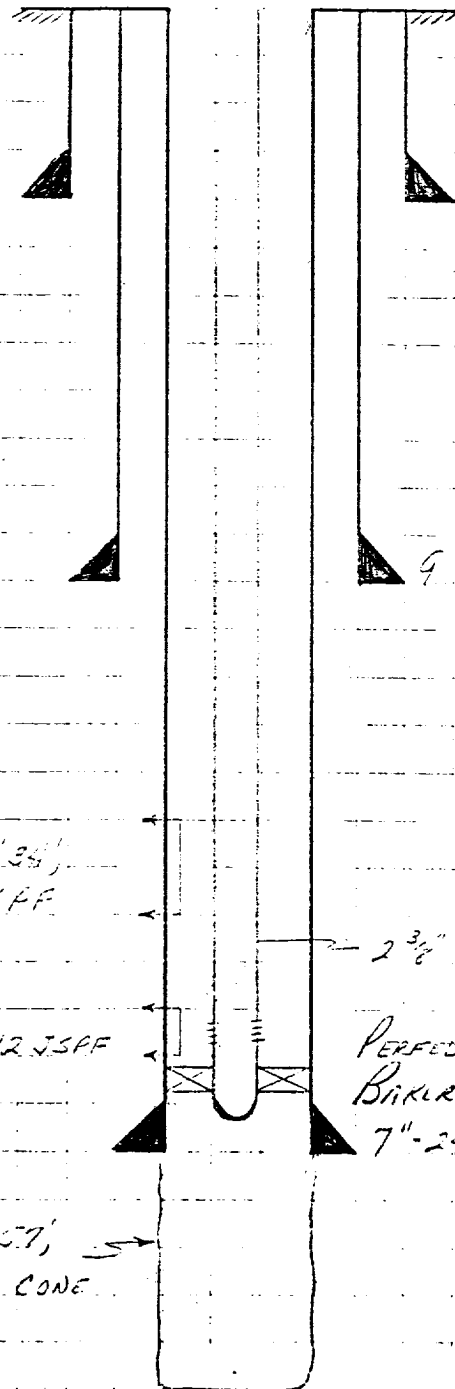

13-40# CSG. @ 255' w/250 SK.

9 5/8" - 36# CSG. @ 2430' w/100 SK.

PERF. 3517', 20', 24', 27', 34',
W/2 JSFF

2 3/8" TRG. @ ± 3700' w/Bull. Pipe

PERF. 3675', 3677' w/2 JSFF

PERFED NIPPLE @ ± 3650'

BRILK MODER AD-1 PRR. @ ± 3700'

7"-24# CSG. @ 3744' w/425 SK.

PERFED O.H. @ 3748', 51', 54', 57',
60', 63', w/6-2 1/2" LINK CONE

T.D. 3835'

FILED T.C.

DRAWN BY

10/5/78

CONTINENTAL OIL COMPANY
CALCULATION SHEET

STATE C-16 #2

COMPLETED - 12/15/38

MONUMENT G-SA
New Mexico

RECEIVED

10/11/73

U.S. CONSERVATION COMM.
WASH. D. C.

RECEIVED

10/11/73

U.S. CONSERVATION COMM.
WASH. D. C.