

## NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

## NOTICE OF INTENTION TO DRILL

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

9/2/36

Place

Date

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico

Gentlemen:


You are hereby notified that it is our intention to commence the drilling of a well to be known as

Tide Water Oil Company.

State I

Well No. 1 in SW 1/4

of Sec. 16, T. 20, R. 37, N. M. P. M., Monument Field, Lea County.  
N. The well is 330 feet [N.] [S.] of the South line and 1650 feet [E.] [W.] of the West line of Section 28-29-37

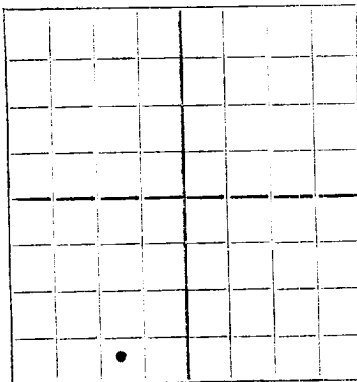

AREA 640 ACRES  
LOCATE WELL CORRECTLY

(Give location from section or other legal subdivision lines. Cross out wrong directions.)  
If state land the oil and gas lease is No. Assignment No. 4487  
If patented land the owner is  
Address  
If government land the permittee is  
Address

The lessee is Tide Water Oil Company

Address Tulsa, Okla

We propose to drill well with drilling equipment as follows: Rotary

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows: Tide Water carries Blanket Bond of \$10,000 W/United State Fidelity and Gauranty Co. as Security  
We propose to use the following strings of casing and to land or cement them as indicated:

| Size of Hole | Size of Casing | Weight Per Foot | New or Second Hand | Depth | Landed or Cemented | Sacks Cement |
|--------------|----------------|-----------------|--------------------|-------|--------------------|--------------|
| 17"          | 13"OD          | 45              | New                | 225   | Cemented           | 250          |
| 12"          | 9-5/8"OD       | 36              | New                | 1250  | "                  | 550          |
| 8-3/4"       | 7"OD           | 24              | New                | 3800  | "                  | 300          |

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 3800 feet.

Additional information: 13"OD Casing will be cemented W/sufficient cement to reach back to surface. 9-5/8"OD Casing will be cemented with 150% of the calculated amount of cement to cement back to surface. 7"OD Casing will be cemented with 150% of the calculated amount of cement to cement back to base of salt.

Approved \_\_\_\_\_  
except as follows:

SEP 3 1936

19

Sincerely yours,

Tide Water Oil Company

Company or Operator

By

Position Prod. Sup't

Send communication regarding well to

Name F. Schneider

Address Drawer R Hobbs, New Mexico

OIL CONSERVATION COMMISSION.

By

Title

