

**P&A PROCEDURE**

*OCD  
markup*

**WELL NAME:** Bell Ramsay NCT-C #1  
**API NUMBER** 30-025-06211  
**COORDINATES:** 1650' FSL & 2310' FEL Unit J  
**SEC/TWN/RNG:** 34 - 20S - 37E

**OPERATOR:** Chevron  
**FIELD:** Eumont  
**DATE:** 7/26/01  
**BY:** DCD

<b>Provide 24 hr Notification to NMOCD of Pending Operations</b>
------------------------------------------------------------------

1. Hold pre-job safety mtg and spot equipment. Check 7" csg and 95/8" x 7" annulus for pressure.
2. ND WH equip and install well control equip.
3. Make trip w/ GR on slickline and check TD. Record FL. Displace wellbore fluids w/ freshwater.
4. Insert 7" wiper plug (cored to allow fluid bypass) into csg and push to 3475' w/ slickline.
5. Surface pour 31cu ft of ZONITE to set 135' btm plug from approx 3340 - 3475'. Set plug in stages, check w/ SL to assure bridges are not occurring and required plug height is achieved. Pour at rate that minimizes potential to bridge. After setting plug, add water as necessary to assure hydration of plug.
6. Push cored 7" wiper plug to 1355' w/ slickline. Set 100' (22 cu ft) ZONITE plug using precautions in Step 5 from 1255 - 1355', across top of salt. Add water if necessary to hydrate plug.
7. Push cored 7" wiper plug to 500' w/ slickline. Set 100' (22 cu ft) ZONITE plug using precautions in Step 5 from 400 - 500', across 95/8" shoe. Add water if necessary to hydrate plug.
8. Push cored 7" wiper plug to 30' w/ slickline. Fill csg w/ ZONITE to 3' below GL (7 cu ft).
9. Remove well control equip, secure WH and RD equip.
10. Allow 48 hours for ZONITE to hydrate, remove WH, cut off casings 3' below GL and cap wellbore.
11. Install dry hole marker stamped w/ required well identification, 4" OD x 4' above the GL.
12. Remove all equip and cut deadmen below the GL.
13. Turn over to Chevron for any surface remediation work.

**Estimated ZONITE Requirements:**

**82 ft<sup>3</sup>**


**WELL PLANNING SHEET  
EXISTING CONFIGURATION**

WELL NAME: Bell Ramsay NCT-C #1  
API NUMBER: 30-025-06211  
COORDINATES: 1650' FSL & 2310' FEL Unit J  
SEC/TWN/RNG: 34 - 20S - 37E  
COUNTY/STATE: Lea, NM

OPERATOR: Chevron  
FIELD: Eumont  
DATE: July 26, 2001  
BY: DCD

RKB = N/A

Formation Tops	
Salt	1355'
Yates	2643'
7 Rivers	2893'
Queen	3390'
Penrose	3508'

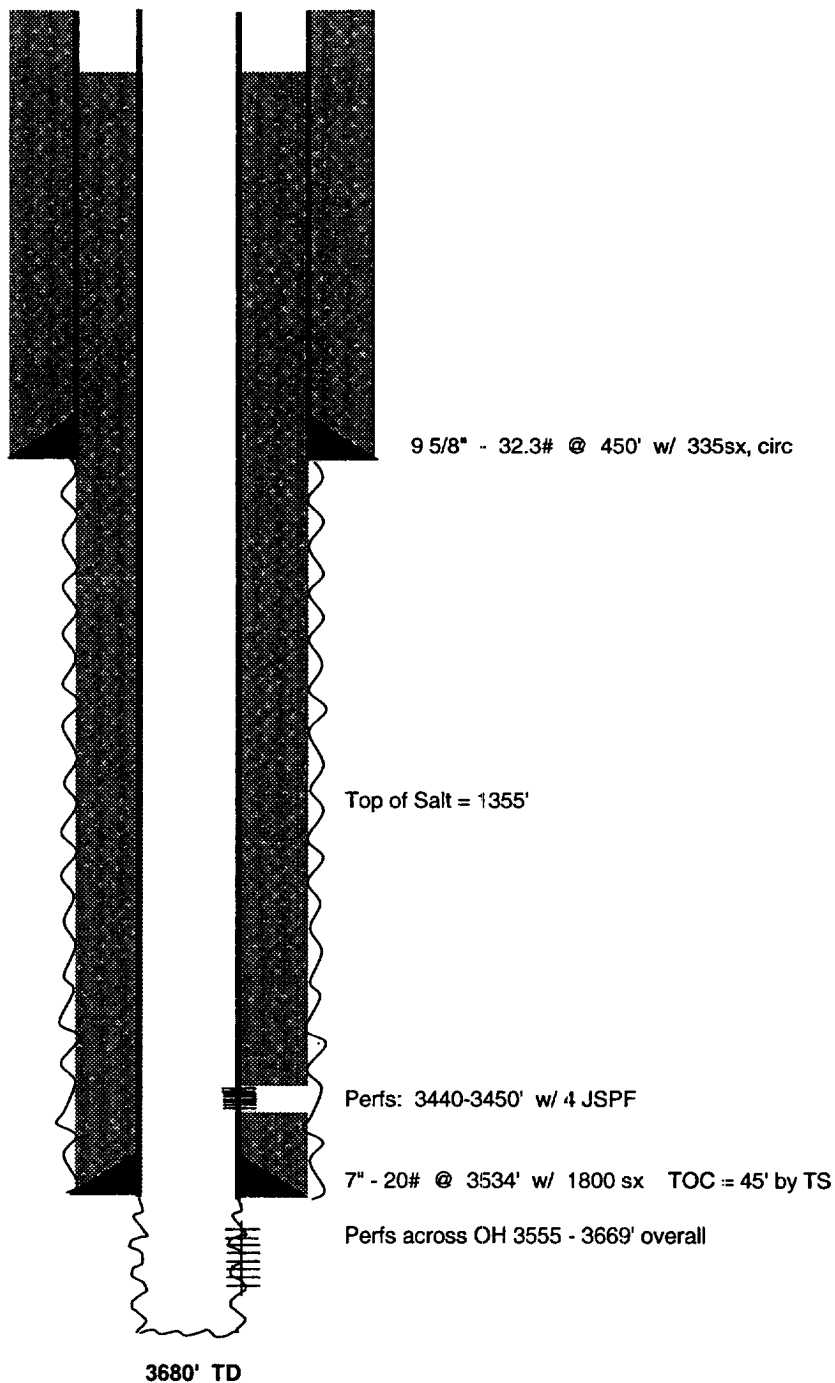

# WELL PLANNING SHEET

## Proposed P&A

WELL NAME: Bell Ramsay NCT-C Com #1  
API NUMBER: 30-025-06211  
COORDINATES: 1650' FSL & 2310' FEL Unit J  
SEC/TWN/RNG: 34 - 20S - 37E  
COUNTY/STATE: Lea, NM  
DRILLED: 1954

OPERATOR: Chevron  
FIELD: Eumont  
DATE: July 26, 2001  
BY: DCD


RKB = N/A

Formation Tops	
Salt	1355'
Yates	2643'
7 Rivers	2893'
Queen	3390'
Penrose	3508'

Legend	
Cement	
ZONITE	

*Plaster  
1275*

ZONITE Plugs	
3 - 30'	
400 - 500'	
1305 - 1355'	
3375 - 3475'	

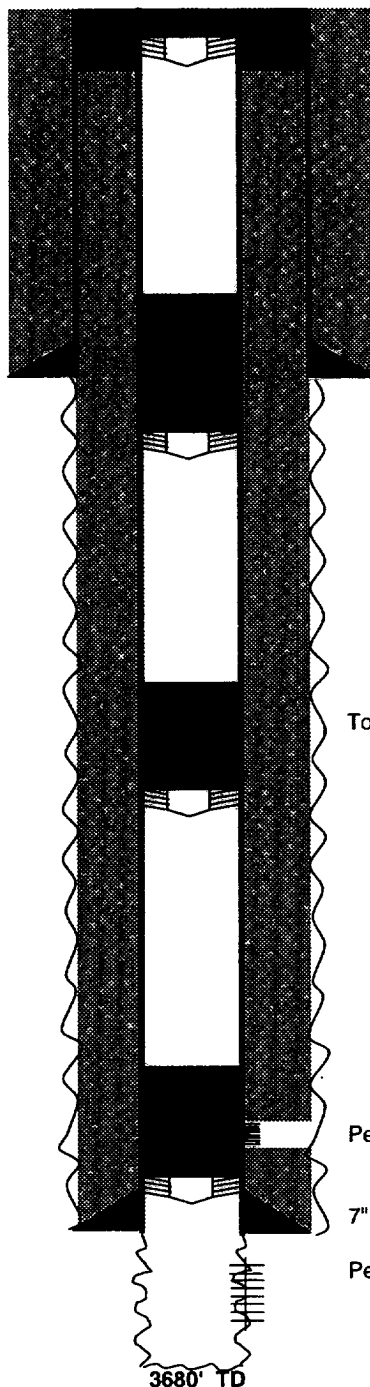

9 5/8" - 32.3# @ 450' w/ 335 sx, circ

Top of Salt = 1355'

*Raise salt  
2500 - 2600*

Perfs: 3440-3450' w/ 4 JSPF

7" - 20# @ 3534' w/ 1800 sx TOC = 45' by TS

Perfs across OH 3555 - 3669' overall

3680' TD