


Las Cruces

Land Office

Lease No.

031620 (b)

Unit

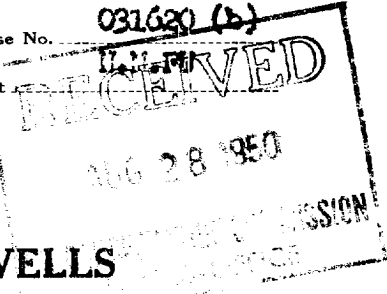

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	X
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Staggs D-23 No. 8

Hobbs, New Mexico

August 25, 1950

Well No. 8 is located 660 ft. from ~~N~~ line and 1900 ft. from ~~E~~ line of sec. 23

R/4 Sec. 23
(1/4 Sec. and Sec. No.)

20 S
(Twp.)

37 E
(Range)

101P1
(Meridian)

Wells
(Field)

Lea
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is 3544 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Written Notice of Intention to Abandon the subject well dated 3-27-50, confirming previous telephone conversation, was approved 4-5-50. Plugging operations were started 3-22-50 and completed 4-1-50, using the following procedure:

7" casing was filled with cement from retainer at 6716' to 6900'. 7" casing was shot off at 3400'. Hole was filled with 12" mud from 6900 to 3450'. Cement plug was set from 3450 to 3350'.

9 5/8" casing was shot off at 2075'. Hole was filled with 12" mud from 3350' to 2125'. Cement plug was set from 2125 to 2025'. Hole was filled with 12" mud from 2025' to 245'. Cement plug was set from 245 to 125'. Hole was filled with 12" mud from 125' to 50'. Cement plug was set from 50' to surface.

4" pipe marker was erected and location restored to original condition.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box CC

Hobbs, New Mexico

By *[Signature]*

Title District Superintendent