


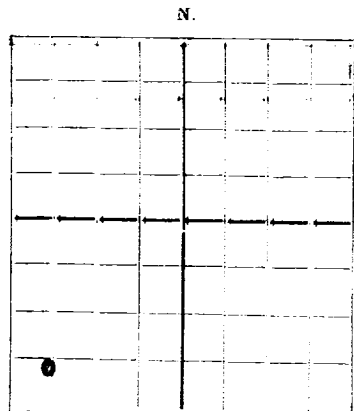

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Gulf Oil Corporation Tulsa, Oklahoma
Company or Operator Address
Bell-Ramsay B Well No. 1 in SW SW of Sec. 29, T. 20S
Lease
R. 37E N. M. P. M. Eunice Field, Lea County.
Well is 1980 feet south of the North line and 1980 feet west of the East line of SW SW
If State land the oil and gas lease is No. B-250 Assignment No. _____
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma
Drilling commenced 2-20 19 37 Drilling was completed 7-21- 19 37
Name of drilling contractor Sparkman & Reusch - Rotary Address Tulsa, Oklahoma
McQueen & Stout - Cable Address Fort Worth, Texas
Elevation above sea level at top of casing 3534 feet.
The information given is to be kept confidential until 7 19 _____

OIL SANDS OR ZONES

No. 1, from 3750 to 3840 No. 4, from _____ to _____
No. 2, from Pay 3775 to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from Rotary Hole to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
16"	51.1	-	Armco	34'6"				
9-5/8	56	8	Lapw.	1126				
7	22	10	Smels.	3706				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
20"	16"	34'6"	80	By hand	Used 100# of Calcium chloride	
12	9-5/8	1126	600	Halliburton		
8-5/4	7	3706	225	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5 1/2"	Plain	Glycerin	450 qts.	3-24-37	3840'	3840'
		Hydrochloric Acid	5000 gal.	7-3-37	3840'	

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0' feet to 3840 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools used to clean out only.

PRODUCTION

Put to producing August 1, 19 37
The production of the first 24 hours was 20, Pumped barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	55'		Surface soil
	275		Sand & shells
	300		Red bed
	390		Shells, sand & red bed
	420		Red rock & shells
	510		Red bed
	563		Red bed & shells
	831		Red bed, shells & red rock
	1102		Red rock & shells
	1185		Anhydrite
	1201		Salt
	1240		Salt & anhydrite
	1543		Salt
	1721		Salt & shells
	1873		Salt, anhydrite & shells
	2505		Salt & shells
	2550		Anhydrite
	2631		Anhydrite & gyp
	2690		Anhydrite
	2728		Anhydrite & gyp
	2875		Anhydrite
	2913		Anhydrite & lime
	2958		Anhydrite & brown lime
	2996		Anhydrite & lime
	3026		Broken lime
	3349		Lime
	3411		Broken sand & lime
Total depth	3840		Lime

Formation top

Anhydrite	1102'
Salt Base	2505
Brown lime	2770
Upper San Andres	3730
Pay	3775