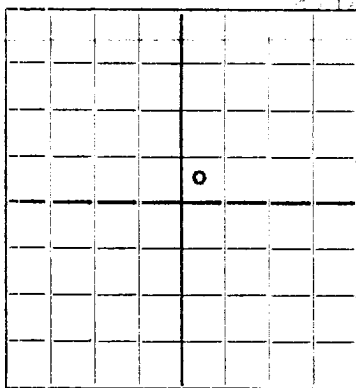


N.

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

Bert Fields

Fields - Turner State

Company or Operator

Lease

Well No. 1 in Section 32 of Sec. 20 S

R. 37 E, N. M. P. M., Eunice Field, Lea County.

Well is 330 feet North of the line and 330 feet East of the line of NE 1/4

If State land the oil and gas lease is No. B-1463 Assignment No. 2

If patented land the owner is - - - Address - - -

If Government land the permittee is - - - Address - - -

The Lessee is - - - Address - - -

Drilling commenced Jan. 21, 1937 Drilling was completed March 4, 1937

Name of drilling contractor Bert Fields, Inc. Address 905 Magnolia Bldg.

Elevation above sea level at top of casing feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from See Log to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from See Log to feet. DUPLICATE

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
12 1/2"	40	8	S.C.	250'	Baker	- -	- -	- -	Sur. Casing
8-5/8"	32	8	S. C.	1235	Hallib	- -	- -	- -	Int. String
6-5/8"	20	10	Y. T.	3705	"	- -	- -	- -	Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	12 1/2"	250	200	Halliburton		
11	8-5/8"	1235	350	"		
7-7/8"	6-5/8"	3705	600	"		

PLUGS AND ADAPTERS

Heaving plug—Material None Length Depth Set

Adapters—Material None Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
3"	Tin	Nitroglyceron	140 qts	3/16/37	3775-3847	
		Acid	2000 Gals	3/17/37	3847	
		"	2000 "	3/21/37	3875	

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3875 feet, and from feet to feet

Cable toops were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing March 22, 1937

The production of the first 24 hours was 120 barrels of fluid of which 100 % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

H. Burdine, Driller F. B. Kimbrough, Driller

P. G. Powell, Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th

Dallas, Texas 4-12-37

day of April, 1937

Name Paul H. Beard

Position Agent

Representing Bert Fields

Notary Public

Company or Operator

My Commission expires May 31, 1937

Address 905 Magnolia Bldg. Dallas, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Cellar
20	120	100,	Calachie Sand & Gravel
120	251	131	Red Bed & Shells
252	445	194	Sand & Red Bed Shells
445	660	215	Red Bed & Red Rock
660	835	175	Red Bed
835	852	18	Red Rock & Red Bed
852	975	123	Red Bed & Shells
975	1060	85	Red & Blue Shale & Shells
1060	1183	123	Red Rock & Red Bed
1183	1280	97	Anhydrite
1280	1295	15	Shale & Potash
1295	1500	205	Salt & Anhydrite
1500	1530	30	Anhydrite
1530	1664	134	Salt & Anhydrite
1664	1920	256	Salt
1920	2187	267	Salt & Anhydrite
2187	2485	298	Salt
2485	2708	223	Anhydrite
2708	2758	50	Anhydrite & Strks of Lime
2758	2810	52	Anhydrite
2810	2822	12	Brown Lime
2822	2882	60	Brown Lime Anhydrite & Pink Shale
2882	2983	101	Lime
2983	3022	39	Brown Lime
3022	3060	38	Lime
3060	3110	50	Lime & Streaks of Gypsum
3110	3153	43	Brown & Grey Lime
3153	3329	176	Lime
3329	3367	238	Hard Lime
3367	3537	170	Lime
3537	3610	73	Sandy Lime
3610	3755	145	Lime
3755	3772	17	Sandy Lime
3772	3785	13	Lime
3785	3803	18	Sand
3803	3865	62	Sandy Lime
3865	3875	10	Lime
	3875		TOTAL DEPTH