


(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Las Cruces

Lease No. 032006-1

Unit 1

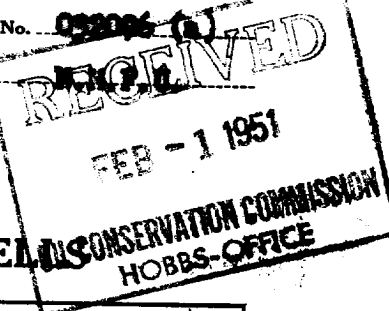

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	<input checked="" type="checkbox"/>
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

A. H. Lockhart A-27 No. 8

Hobbs, New Mexico February 1, 1951

Well No. 8 is located 660 ft. from N line and 1650 ft. from W line of sec. 27

N 1/4 Sec. 27 (A Sec. and Sub. No.) 21 S (Twp.) 17 E (Range) 1000 (Meters)

Drinking (Field) Lee (County or Subdivision) New Mexico (State or Territory)

The elevation of the derrick floor above sea level is 3418 ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Set 5 1/2" casing at 6669 and cemented with 375 sacks cement.
Total depth of hole 6670 in Line. Plug down 4:00 P.M. 1-12-51. Top of cement behind casing 2950' by temperature survey.

On 1-23-51, pressure tested casing with 1200# for 30 minutes.
Final pressure 1180#. Drilled out cement plug to 3663 for plugged back total depth.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Continental Oil Company

Address Box 00

Hobbs, New Mexico

FEB - 1 1951

By J. L. Shaffer

Title District Superintendent

023025 (a)
 N.H.P.U.

Y

22	February 1	Home, New London	6.11.1945	11.11.1945
23	XX	10.10	11	12
		10.10	11	12
		10.10	11	12

2142

1-1-45. Pressure tested casing with 1500' for 30 minutes.
 Total depth of hole 6000 in 1945. First down hole 1-1-45. Top of
 cement casing casing 2750' by temperature survey.

1-1-45. Pressure tested casing with 1500' for 30 minutes.
 Total pressure 1100'. Depth of casing 2750' by temperature survey.

Continued on page 2

20

Home, New London

Continued on page 2