
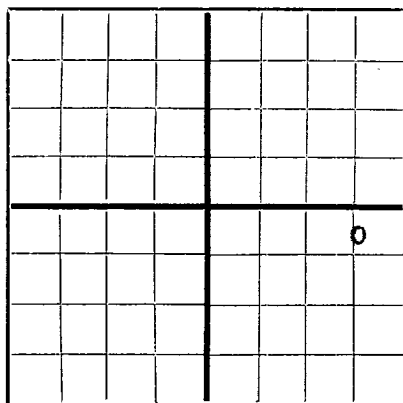


N

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico



WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation Hobbs, New Mexico
Company or Operator Address
Carson "C" Well No. 4 in NE 1/4 of SE 1/4 of Sec. 28, T. 21S
Lease 37E Drinkard Field, Lea County.
R. N. M. P. M. Well is 3300 feet south of the North line and 660 feet west of the East line of Section 28
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Mrs J. E. Carson Address Eunice, New Mexico
If Government land the permittee is Address
The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma
Drilling commenced 6-30 19 47 Drilling was completed 8-30 19 47
Name of drilling contractor Ashby Drilling Company Address 3702 Fairmont St
Elevation above sea level at top of casing 3435 feet Dallas, Texas
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 6490 to 6612 No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8"	54.50	8 R	SS	2837'					
9-5/8"	36	8 R	SS	2835'					
7"	23	8 R	SS	6472'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/2"	18-3/8"	555'	800	HOWCO		
12-1/2"	9-3/8"	2850'	1300	HOWCO		
8-3/8"	7"	6485'	700	HOWCO		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		15% UCL	1000	8-29-47		

Results of shooting or chemical treatment Flowed 312 bbls. oil in 24 hrs. thru 3/4" choke.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 6612 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing 9-1 19 47
The production of the first 24 hours was 223 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Ashby Drilling Company— Contractor Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 9 th

day of September 19 47

[Signature]
Notary Public

My Commission expires 10-24-49

Hobbs, New Mexico 9-8-47

Name E. J. Gallagher

Position District Sup't.

Representing Gulf Oil Corporation

Company or Operator

Address Box 1667, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
	46'		Red Bed and surface rock
	87'		Sand
	210'		Sand and red bed
	305'		Red Bed
	350'		Red Bed and rock
	595'		Red Bed
	1123'		Anhydrite and Red Rock
	1205'		Anhydrite
	1496'		Salt
	1630'		Salt and Anhydrite streaks
	2438'		Anhydrite
	3156'		Lime and gypsum
	3256'		Lime
	6200'		Coring
	6216'		Coring
	6241'		Coring
	6266'		Coring
	6286'		Coring
	6306'		Coring
	6321'		Coring
	6341'		Lime
	6612'		Total Depth
			FORMATION TOPS
			Anhydrite 1170'
			Base Salt 2400'
			Brown Lime 2700'
			White Lime 3900'
			Oil or Gas Pay 6490'