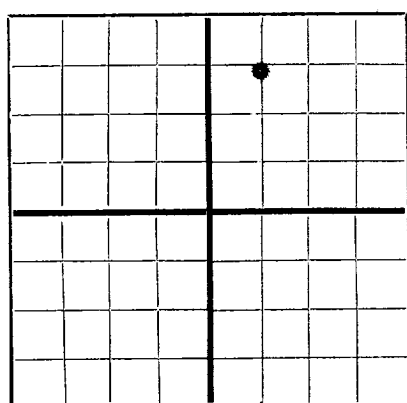


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation Hobbs, New Mexico
Company or Operator Address
Eunice King Well No. **10** in **NW NE** of Sec. **28**, T. **21 S**
Lease
R. **37 E**, N. M. P. M., **Brunson** Field, **Lea** County.
Well is **660** feet south of the North line and **1980** feet west of the East line of **Section 28**.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is **W. H. Turner**, Address **Eunice, New Mexico**
If Government land the permittee is, Address
The Lessee is **Gulf Oil Corporation - Gypay Division**, Address **Tulsa, Oklahoma**
Drilling commenced **March 31**, 19 **48** Drilling was completed **June 5**, 19 **48**
Name of drilling contractor **Two States Drilling Company**, Address **Dallas, Texas**
Elevation above sea level at top of casing **3456** feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from **5110** to **5310** No. 4, from **7865** to **8030**
No. 2, from **6520** to **6640** No. 5, from to
No. 3, from **7400** to **7600** No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to **(Rotary Tools)** feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8"	48#	8 Rd	SS	281'					
9-5/8"	36#	8 Rd	SS	2335'					
7"	23#	8 Rd	SS	7352 1/2'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13-3/8"	297'	300	HOWCO		
12 1/2"	9-5/8"	2850'	1300	"		
8-3/4"	7"	7865'	800	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		none				

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0'** feet to **8040'** TD feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing **June 6**, 19 **48**
The production of the first 24 hours was **1032** barrels of fluid of which **100** % was oil; **0** % emulsion; **0** % water; and **0** % sediment. Gravity, Be. **40.5 API**
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Two States Drilling Company, Driller, Driller
Driller, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **16th** day of **June**, 19 **48**
Notary Public
My Commission expires **10-24-49**
Hobbs, New Mexico **June 15, 1948**
Name **E. J. Gallagher**
Position **District Sup't.**
Representing **Gulf Oil Corporation**
Company or Operator
Address **Box 1667, Hobbs, New Mexico**

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0'	51'		Surface sand and caliche
	225		Redbeds
	300		Redbed shells
	765		Redbed shells and sand
	1000		Redbeds and shells
	1125		Redbeds and anhydrite
	1272		Red rock and anhydrite
	1322		Anhydrite
	1776		Anhydrite and salt
	2365		Salt
	2437		Salt and anhydrite
	2837		Anhydrite
	2851		Anhydrite, potash and gypsum
	2990		Anhydrite
	3057		Anhydrite and lime
	3195		Anhydrite
	3969		Lime
	4090		Lime and sand
	7378		Lime
	7379		Lime and shale
	7420		Lime and gypsum
	7449		Sand and shale
	7482		Sand, lime and shale
	7489		Lime
	7560		Sand and lime
	7575		Sandy lime and shale
	7606		Lime and shale
	7622		Lime
	7696		Shale and lime
	7728		Shale
	7738		Shale and lime
	7758		Shale
	7796		Shale and lime
	7830		Lime
	7849		Lime and dolomite
	7860		Lime
	8037		Lime
	8040 (TOTAL DEPTH)		Granite

FORMATION TOPS

Anhydrite	1210'
Base Salt	2400'
Brown Lime	2720'
White Lime	3900'
OIL or GAS PAY	7865'