
AREA 640 ACRES  
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

## WELL RECORD

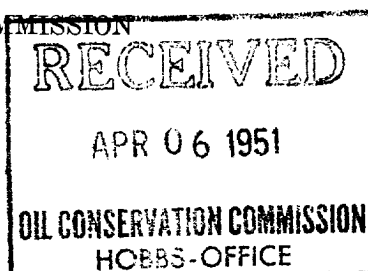

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

SUNRAY OIL CORPORATION Box J, Hobbs, New Mexico  
Company or Operator Address  
V. Linam Well No. 3 in SE of NE of NE Sec. 29, T. 21S  
Lease  
R. 37E, N. M. P. M., Drinkard Field, Lea County.  
Well is 990 feet south of the North line and 330 feet west of the East line of Sec. 29-21S-37E  
If State land the oil and gas lease is No. Assignment No.  
If patented land the owner is A. F. Mitchell, Address Oil Center, New Mexico  
If Government land the permittee is, Address  
The Lessee is Sunray Oil Corporation, Address First National Building  
Drilling commenced February 5, 1951 Drilling was completed March 30, 1951  
Name of drilling contractor Makin Drilling Company, Address Hobbs, New Mexico  
Elevation above sea level at top of casing 3470 feet.  
The information given is to be kept confidential until 19.

## OIL SANDS OR ZONES

No. 1, from 6500' to 6710' No. 4, from to  
No. 2, from 7928' to 7941' No. 5, from to  
No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.  
No. 2, from to feet.  
No. 3, from to feet.  
No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
13 3/8	76	8	Nat'l	315'	Tex. Pat. Baker			
9 5/8	32.3	8	Nat'l	2850'	Baker-Float			

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/4	13 5/8	315'	500	Halliburton		Circulated Cement
11 1/4	9 5/8	2850'	2000	"		" "

## PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set  
Adapters — Material Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment  
.....  
.....

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from Surface feet to 7941 TD feet, and from feet to feet  
Cable tools were used from feet to feet, and from feet to feet

## PRODUCTION

Put to producing Abandoned March 30, 1951  
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be.  
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.  
Rock pressure, lbs. per sq. in.

## EMPLOYEES

Dwight Faulk, Driller S. A. Sitty, Driller  
O. J. Anderson, Driller J. E. Matthews, P. S. Box, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this

day of , 19

Notary Public

My Commission expires

Hobbs, New Mexico April 5, 1951  
Name O. J. Anderson Date  
Position Dist. Supt.  
Representing Sunray Oil Corporation  
Company or Operator  
Address Box J, Hobbs, New Mexico

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	53	53	Sandy Caliche
53	300	247	red bed
300	1190	890	Red bed & shale
1190	1320	130	" " "
1320	2466	1146	Anhydrite
2466	2589	123	Anhydrite & salt
2589	2625	36	Anhydrite & gyp
2625	2795	170	Anhydrite
2795	2818	23	Lime
2818	2850	32	Lime
2850	7236	4386	Shale & gypsum streaks - lime
7236	7385	149	Lime & chert
7385	7416	31	Lime
7416	7460	44	Lime & chert
7460	7477	17	Lime & shale
7477	7540	63	Lime & shale
7540	7610	70	Lime & shale
7610	7635	25	Lime & chert
7635	7696	61	Lime & shale
7696	7740	44	Sandy shale
7740	7757	17	Lime & shale
7757	7806	49	Sandy shale & lime
7806	7910	104	Lime & shale
7910	7920	10	Broken sand & shale
7920	7930	10	Shale & sand
7930	7941 TD	11	Sand

DST 7900' to 7910' recovered 6' drill mud.  
DST 7927' to 7941' recovered 180' oil cut  
mud.  
1000' salt water.