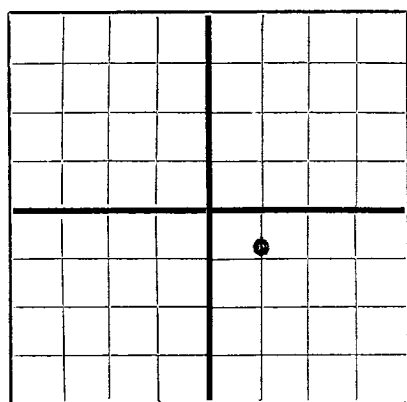


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation

Hobbs, New Mexico

J. N. Carson "A"

Company or Operator

Well No.

6

in NW SE

of Sec.

28

T 21S

Lease

R 37E, N. M. P. M., Drinkard Field, Lea County.

Well is 3194 feet south of the North line and 2086 feet west of the East line of Section 28

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Mrs. J. N. Carson Address Eunice, New Mexico

If Government land the permittee is Address

The Lessee is Gulf Oil Corporation Address Tulsa, Oklahoma

Drilling commenced February 3, 1948 Drilling was completed March 19, 1948

Name of drilling contractor Two States Drilling Co. Address Dallas, Texas

Elevation above sea level at top of casing 3444 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8"	36#, 48#		SS	302'					
9-5/8"	36#	8 Rd	SS	2836'					
7"	23#	8 Rd	SS	6469'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	13-3/8"	318'	300	HOWCO		
12 1/4"	9-5/8"	2850'	1300	"		
8-3/4"	7"	6481'	700	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		15% Acid	1000 Gal	3-18-48	6611'	

Results of shooting or chemical treatment Flowed 214 bbls oil in 11 hrs through 3/4" water Choke.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 6611 feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing March 19, 1948

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be.

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Two States Drilling Co., Driller Driller

Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 24th Hobbs, New Mexico 3-23-48

day of March 1948 Name E. J. Gallagher

Position District Sup't.

Representing Gulf Oil Corporation

Company or Operator

My Commission expires 10-24-49 Address Box 1667, Hobbs, New Mexico

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	140		Caliche sand and gravel
	321		Redbeds
	440		Red rock
	820		Redbeds
	1155		Red rock
	1215		Red rock and anhydrite
	2413		Anhydrite and salt
	2520		Anhydrite
	2551		Anhydrite and gypsum
	2590		Anhydrite
	2614		Anhydrite and gypsum
	2851		Anhydrite
	3435		Anhydrite
	3475		Lime
	3516		Anhydrite and gypsum
	3720		Lime
	3900		Lime and sand
	4270		Lime Sandy Lime
	4338		Lime
	4456		Sand and lime
	6214		Lime
	6229		Lime and shale
	6611	(TOTAL DEPTH)	Lime
			FORMATION TOPS
			Anhydrite 1150'
			Base Salt 2410'
			Brown Lime 2680'
			White Lime 3900'
			Oil Pay 6485'