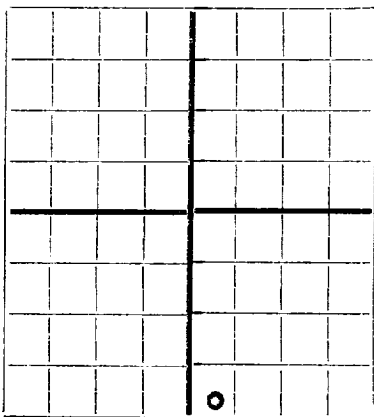


N

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

RECOMPLETION

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

STANOLIND OIL & GAS COMPANY: BOX "F": HOBBS, NEW MEXICO
Company or Operator Address
W. H. TURVER Well No. 2 in SE 1/4 of Sec. 29, T. 21-S
Lease
R. 37-E, N. M. P. M., PRIMARD Field, LEA County.
Well is 330 feet North South of the East line and 2310 feet west of the East line of Section 29
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is W. H. TURVER, Address: EUNICE, N.M.
If Government land the permittee is, Address:
The Lessee is, Address:
Drilling commenced June 5, 1947. Drilling was completed July 12, 1947
Name of drilling contractor: JOHNN DRILLING COMPANY, Address: FT. WORTH, TEXAS
Elevation above sea level at top of casing: 3471 feet.
The information given is to be kept confidential until Not confidential 19.

OIL SANDS OR ZONES

No. 1, from 6518' to 6625' No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
4 1/2"	11.6#	8	NEW	6625'	Paker		6530	6540	Oil string
							6556	6566	
							6574	6590	
							6600	6610	
							6613	6617	

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
6-1/8" 4 1/2"	4 1/2"	6625'	400	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Hcl Acid	1000 gal	7-13-47	6530- 6617 thru above perforations	

Results of shooting or chemical treatment: No test prior to acidizing with 1000 gallons following acid flowed 250 BO first 16 hrs. On potential test flowed 165.67 BO in 24 hrs. Gas oil ratio 1853 cu.ft.perbbl.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto. None

TOOLS USED

Rotary tools were used from 3752 feet to 6625 feet, and from feet to feet
Cable tools were used from Not Used feet to feet, and from feet to feet

PRODUCTION

Put to producing July 15, 1947
The production of the first 24 hours was 165.67 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be. 39°
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

Driller S. E. Roy
Driller J. D. Berry Bruce Blain

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 17th day of July, 1947
Notary Public
LEA COUNTY, N.M.
My Commission expires 2-23-1950
Hobbs, N.M. 7-15-47
Place Date
Name Field Superintendent
Position STANOLIND OIL & GAS CO.
Representing Company or Operator
Address BOX "F": HOBBS, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
3752	5000	1248	Lime
5000	5020	20	Dolomite and Sandy Dolomite
5020	5050	30	Lime - Sandy
5050	5130	80	Dolomite Lime - Sandy
5130	5160	30	Limey Dolomite - Sandy
5160 1560	5300	140	Dolomite - Sandy
5300	6400	1100	Lime
6400	6500	100	Dolomite
6500	6505	15	Lime
6505 6505	6515	10	Dolomite
6515	6520	5	Limey Dolomite
6520	6555	35	Dolomitic Lime
6555	6595	40	Dolomite
6595	6605	10	Lime
6605	6625	20	Dolomite
TOTAL DEPTH 6625			
RECOMPLETION OF OLD WELL			
OLD TOTAL DEPTH 3752'			