


N.


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DUPLICATE

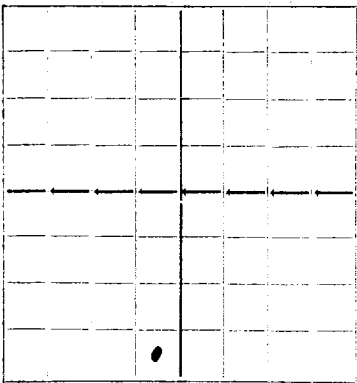

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Repollo Oil Company

Hobbs, New Mexico

Company or Operator H. S. Turner Well No. 1 in S/2SW/4 of Sec. 29, T. 21S  
Lease 37 E Field, Hardy Lea County.  
R. North South Well is 330 feet North of the North line and 330 feet west of the East line of S/2SW/4 -29  
If State land the oil and gas lease is No. \_\_\_\_\_ Assignment No. \_\_\_\_\_  
If patented land the owner is H. S. Turner, Address \_\_\_\_\_  
If Government land the permittee is \_\_\_\_\_, Address \_\_\_\_\_  
The Lessee is \_\_\_\_\_, Address \_\_\_\_\_  
Drilling commenced 10/9/37 19\_\_\_\_ Drilling was completed 12/12/37 19\_\_\_\_  
Name of drilling contractor Mac & Stauffer Drlg. Co. Address Tulsa, Okla.  
Elevation above sea level at top of casing 3460 feet.  
The information given is to be kept confidential until \_\_\_\_\_ 19\_\_\_\_

OIL SANDS OR ZONES

No. 1, from 3715 to 3600 No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.  
No. 1, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
13" OD	45	8		201	TP				
8 5/8" OD	28	8		1247	Float				
7" OD	24	10		3627	Float				
2" Reg. SS Tubing				3872					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
15 1/2"	13" OD	210	200	Halliburton		
10"	8 5/8" OD	1257	200	do		
8 1/4"	7" OD	3635	200	do		

PLUGS AND ADAPTERS

Heaving plug—Material \_\_\_\_\_ Length \_\_\_\_\_ Depth Set \_\_\_\_\_  
Adapters—Material \_\_\_\_\_ Size \_\_\_\_\_

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Dowell "XX"	2000 Gal.	12/12/37	3700-3800	bottom

Results of shooting or chemical treatment Flowed 283 Barrel 24 hours

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from \_\_\_\_\_ feet to \_\_\_\_\_ feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from 0 feet to 3800 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

PRODUCTION

Put to producing 12/13/37 19\_\_\_\_  
The production of the first 24 hours was 283 barrels of fluid of which 100 % was oil; \_\_\_\_\_ % emulsion; \_\_\_\_\_ % water; and \_\_\_\_\_ % sediment. Gravity, Be \_\_\_\_\_  
If gas well, cu. ft. per 24 hours \_\_\_\_\_ Gallons gasoline per 1,000 cu. ft. of gas \_\_\_\_\_  
Rock pressure, lbs. per sq. in. \_\_\_\_\_

EMPLOYEES

Geo. King Driller C.C. McCausland Driller  
B. M. Folger Driller \_\_\_\_\_ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this \_\_\_\_\_ day of \_\_\_\_\_ 19\_\_\_\_  
Notary Public \_\_\_\_\_  
My Commission expires \_\_\_\_\_  
Hobbs, N.M. 1/12/38  
Name P. Summitt  
Position Dist. Supt.  
Representing Repollo Oil Company  
Company or Operator  
Address Hobbs, N.M.

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	135	135	Sand
135	1170	1035	Red Bed & Red Rock
1170	1305	135	Anhydrite
1305	1385	80	Salt
1385	2500	1115	Salt & Anhydrite
2500	2980	480	Anhydrite & Lime
2980	3465	485	Lime
3465	3495	30	Sandy Lime
3495	3506	11	Lime
3506	3520	14	Sandy Lime
3520	3743	223	Lime
3743	3759	16	Sandy Lime
3759	3800	41	Lime