

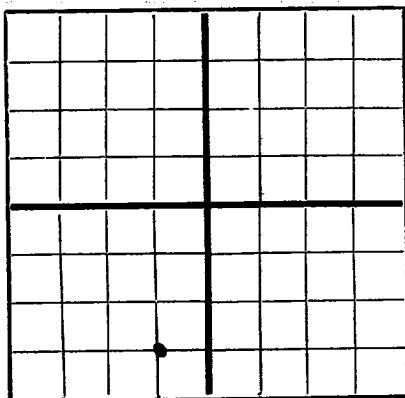
SEP 25 1947

HOBBS OFFICE

DUPLICATE

FORM C-119

N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-119 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Apollo Oil Company

Hobbs, New Mexico

Company or Operator

Address

Hazel J. Turner Well No. 3 in 34 of Sec. 29, T. 21S

R. 37E, N. M. P. M., Arishard Field, Lea County.

Well is 660 feet North of the 34th line and 1900 feet East of the 29th line of Sec. 29

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is Hazel J. Turner Address Hobbs, New Mexico

If Government land the permittee is Address

The Lessee is Address

Drilling commenced 8/6/47 19 Drilling was completed 9/2/47 19

Name of drilling contractor Eastland Oil Company Address Fort Worth, Texas

Elevation above sea level at top of casing 3461 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 6480 to 6616 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8	48 240	8PT X2	33	329	None				
8 5/8	32 83	8PT X2	33	2704	None				
5 1/2	17 195	8PT X2	33	6616	Float				
2 3/4	4.75 395	8PT X2	33	6600					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
13 3/8	13 3/8	332	2900	Balliberton		
12 1/2	8 5/8	2704	1000	do		
12	5 1/2	6616	300	do		

PLUGS AND ADAPTERS

Heaving plug—Material None Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	100	100	Sand & Caliche
100	1265	1165	Red Soil & Shells
1265	1331	66	Anhydrite & Shale
1331	2535	1204	Anhydrite & Salt
2535	3110	575	Anhydrite & Lime
3110	3190	80	Sandy Lime
3190	3640	450	Lime
3640	4390	750	Sandy Lime
4390	5300	910	Lime

CASING PERFORATIONS

9/11- Perforated Casing w/ 6-1/2" holes per foot
from 4554 to 4600 Ft.

DEVIATION SURVEY

530 Ft. 0 degrees / vertical

1000	0	0
1600	1/4	0
2000	1/4	0
2500	1	0
3000	1 1/2	0
3400	1 1/4	0
4150	1 1/2	0
4500	1/2	0
4550	1/2	0
4590	1	0

GENERAL REMARKS

DRILLER'S SIGNATURE

DRILLER'S SIGNATURE

QUEST FOR THE FUTURE

QUEST FOR THE FUTURE