


OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

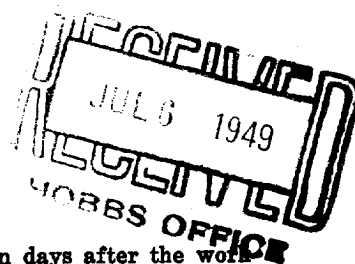

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL		Report on Setting Casing	X

July 2, 1949

Monument, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the _____

Amerada Petroleum Corporation State DB Well No. 2 in the _____

Company or Operator

Lease

SW 1/4 NW 1/4 of Sec. 32, T. 21S, R. 37E, N. M. P. M.,

Drinkard Field, Lea County.

The dates of this work were as follows: July 1, 1949

Notice of intention to do the work was (~~was not~~) submitted on Form C-102 on July 1, 1949

and approval of the proposed plan was (~~was not~~) obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

2830' Total Depth, Lime. Rigged up and ran 58 jts. 2377.53' of 8-5/8" OD, 28#, 8RT, R-3, SS.Csg. (New) & 11 jts. 449.73' of 8-5/8" OD, 32#, J-55, R-3, 8RT, SS, Csg. (New). Csg. Set at 2829' and cemented with 1000 sacks Lone Star Reg. Cement mixed 3% Gel. & 500 sacks Lone Star Reg. & 50 sacks Incor Quick Set Cement. Plug pumped to 2742' at 12:05 P.M. 7-1-49 Max. Pump pressure 800#. Ran Temperature Survey & found top of cement at 875', Actual fill 1954', Ratio of Actual to Calculated fill 29.7%.

Witnessed by D.F. Furse Amerada Petroleum Corporation Foreman
Name Company Title

Subscribed and sworn before me this _____

I hereby swear or affirm that the information given above is true and correct.

2nd. day of July 1949

Name W. F. Furse

Position Asst. Dist. Supt.

Representing Amerada Petroleum Corporation
Company or Operator

Will Hailer Taylor
Notary Public

My commission expires MY COMMISSION EXPIRES MARCH 29, 1952

Address Drawer D, Monument, New Mexico

Remarks:

APPROVED

JUL 6 1949

Ray Garbrough
Name
OIL & GAS INSPECTOR
Title