


NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

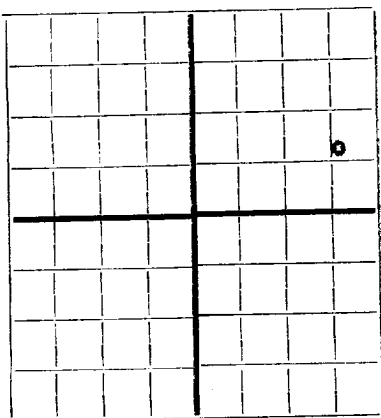

AREA 640 ACRES  
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

**Gulf Oil Corporation** Box 661, Tulsa, Oklahoma  
Company or Operator Address  
**Wm. T. McCormack** Well No. **10** in **NE** of Sec. **32**, T. **21S**  
Lease  
R. **37E**, N. M. P. M., **Eunice** Field, **Lea** County.  
Well is **2086** feet south of the North line and **554** feet west of the East line of **NE 1/4**  
If State land the oil and gas lease is No. --- Assignment No. ---  
If patented land the owner is ---, Address ---  
If Government land the permittee is ---, Address ---  
The Lessee is **Gulf Oil Corporation**, Address **Tulsa, Oklahoma**  
Drilling commenced **3 - 2** 19 **47** Drilling was completed **4 - 13** 19 **47**  
Name of drilling contractor **Olsen Drilling Company**, Address **Tulsa, Oklahoma**  
Elevation above sea level at top of casing **3460** feet. **Derrick Floor.**  
The information given is to be kept confidential until --- 19 ---

OIL SANDS OR ZONES

No. 1, from **6495** to --- No. 4, from --- to ---  
No. 2, from --- to --- No. 5, from --- to ---  
No. 3, from --- to --- No. 6, from --- to ---

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from --- to --- feet.  
No. 2, from --- to --- feet.  
No. 3, from --- to --- feet.  
No. 4, from --- to --- feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13-3/8	48	8R	E W	294					
9-5/8	36	8R	S S	2850					
7	23	8R	E W	6498					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17-1/4	13-3/8	294	300	Howee		
12-1/4	9-5/8	2850	1300	Howee		
8-3/4	7	6498	700	Howee		

PLUGS AND ADAPTERS

Heaving plug—Material --- Length --- Depth Set ---  
Adapters—Material --- Size ---

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment ---  
---

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **5605** feet, and from --- feet to --- feet  
Cable tools were used from --- feet to --- feet, and from --- feet to --- feet

PRODUCTION

Put to producing **April 20** 19 **47**  
The production of the first 24 hours was **162** barrels of fluid of which **100** % was oil; --- %  
emulsion; --- % water; and --- % sediment. Gravity, Be. **42.6**  
If gas well, cu. ft. per 24 hours --- Gallons gasoline per 1,000 cu. ft. of gas ---  
Rock pressure, lbs. per sq. in. ---

EMPLOYEES

---, Driller ---, Driller  
---, Driller ---, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **8**  
day of **May**, 19**47**  
**Stu Evans**

**Tulsa, Oklahoma** **April 28, 1947**  
Date  
Name **A. M. Bell, Jr.**  
Position **General Superintendent**

## FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	99		Surface soil, gravel and caliche
	240		Caliche and red bed
	300		Red rock and shale
	855		Shale and red bed
	1130		Red rock and shale
	1311		Anhydrite and gyp
	2440		Salt and anhydrite
	2512		Anhydrite
	2773		Anhydrite and gyp
	2850		Anhydrite
	3352		Gyp and anhydrite
	3403		Gyp, anhydrite and lime
	3640		Anhydrite and lime
	3759		Lime and gyp
	4072		Lime and sand
	4215		Sandy lime
	4316		Lime and sand
	4377		Lime
	4480		Lime and sand
	6605		Lime (TOTAL DEPTH)

## FORMATION TOPS

Rustler	1100'
Base Salt	2420'
Yates	2620'
San Andres	3880'
Glorietta	5115'
Tubb	6090'
Vivian	6495'