


RECEIVED
DEC 31 1947
HOBBS OFFICE

FORM C-105

N

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

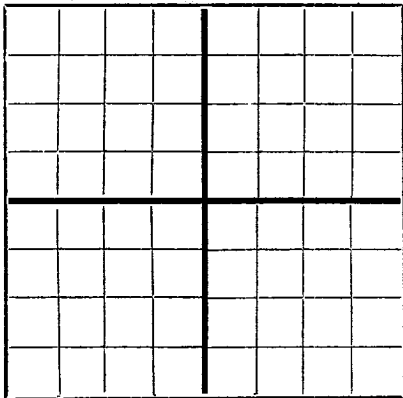

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Gulf Oil Corporation

Hobbs, New Mexico

McCormack Company or Operator
Well No. 11 in NE NE of Sec. 32, T. 21S
Lease 378, N. M. P. M., Silurian Pay Field, Lea County.
Well is 554 feet south of the North line and 554 feet west of the East line of Sec. 32
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Mrs. W.T. McCormack Address Dunice, New Mexico
If Government land the permittee is Address
The Lessee is Gulf Oil Corporation, Gypsy Division Address Tulsa, Oklahoma
Drilling commenced Aug. 24 1947 Drilling was completed March 24 1947
Name of drilling contractor Olson Drilling Company Address Midland, Texas
Elevation above sea level at top of casing 3473 feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
13 3/8"	48#	8Rd	SS	3381 304'					
9 5/8"	36#	8Rd	SS	2850 2837'					
7"	23#	8Rd	SS	7259'					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/4"	13 3/8"	318'	300	HOMCO		
12 1/4"	9 5/8"	2850'	1300	"		
8 3/4"	7"	7270'	800	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 8318' plugged back to 7221' feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing November 24 1947
The production of the first 24 hours was 487 barrels of fluid of which 100% 98.2% was oil; 1.8% Mud
% water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Olson Drilling Company Driller Driller
Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 10th day of December 1947
Name E. J. Gallagher
Position Dist. Superintendent
Hobbs, New Mexico Dec. 10, 1947

FORMATION RECORD

[illegible]