



NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico



WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

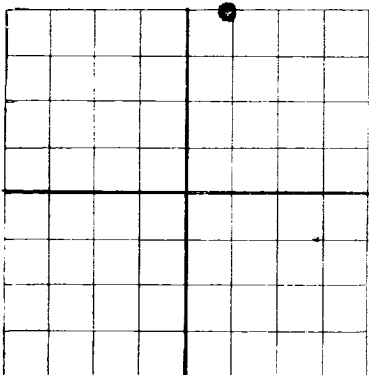

AREA 640 ACRES
LOCATE WELL CORRECTLY

STAR ROUTE # 3, SEAGRAVES, TEXAS

J. N. CARSON

W 1/2 NE 1

33-28

21-S

37-2

Lease

Well No.

3

in

Sec.

T.

R. 660

N. M. P. M.

660

Field, East

West

J. N. Carson, Lessee

Well is _____ feet south of the North line and _____ feet west of the East line of _____

If State land the oil and gas lease is No. _____ Assignment No. _____

If patented land the owner is _____ Address _____

If Government land the owner is _____ Address _____ Star Rt. #3, Seagraves, Tex

The Lessee is _____ June 2, 39 _____ Address _____ July 1, 39

Drilling commenced _____ Hershbach Drilling Co. Drilling was completed _____ Hobbs, New Mexico. 19

Name of drilling contractor _____ 3442 _____ Address _____

Elevation above sea level at top of casing _____ Release at well.

The information given is to be kept confidential until _____ 19 _____

No. 1, from 3448 to 3585 (gas bearing) to 3760
No. 2, from _____ to _____
No. 3, from _____ to _____
No. 4, from _____ to _____
No. 5, from _____ to _____
No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on _____ of water inflow and elevation _____ which water rose in hole. amount negligible; no flow

No. 1, from 3433 to 3448 feet. " " " "

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE OF PIPE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF JOINT	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10 3/4"	3592	8	Wheeling	292'	Shop				
7" OD	244	10	Pitts	3592'	Halliburton				

MUDDING AND CEMENTING RECORD

SIZE OF PIPE	SIZE OF JOINT	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13 3/4"	10 3/4"	302'	150	pump	
8 3/4"	7" OD	3600'	325	pump	

3 yds pea gravel AND ADA 225' 3412 - 3640

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Explosive	450	7/3/39	3640-3760	3760

Results of shooting or chemical treatment Well flowed at rate of 648 bbls oil per 24 hrs.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3760 feet, and from _____ feet to _____ feet

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing July 1, 39

The production of the first 24 hours was 648 barrels of fluid of which 100 % was oil; _____ %

emulsion; _____ % water; and _____ % sediment. Gravity, Be _____

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

C. White

Driller E. A. Hailer

Driller

Lee Bird

Driller E. L. Byrd

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 10th

day of July 39

Notary Public

Allred, Texas July 10, 1939

Name Ray Levy

Position Superintendent

Representing Alcoa Oil Company

Company or Operator

Address Star Route #3, Seagraves, Texas.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	132	132	Caliche & white sand.
132	175	43	Red bed & shells.
175	306	131	Red bed & sand.
306	533	227	Red bed.
533	1052	519	Red bed & sand.
1052	1165	113	Anhydrite.
1165	1568	403	Anhydrite, salt & shale.
1568	2378	810	Anhydrite & salt.
2378	2556	178	Anhydrite & potash.
2556	2662	106	Anhydrite & gyp.
2662	2881	219	Anhydrite & lime.
2881	3126	245	Anhydrite, gyp, white & brown lime.
3126	3404	278	Lime & anhydrite.
3404	3433	29	Lime.
3433	3448	15	Lime & water sand.
3448	3458	10	Sandy lime, gas bearing.
3458	3496	38	Grey lime, " "
3496	3518	22	Sandy lime, " "
3518	3522	4	Grey lime, " "
3522	3535	13	Grey sandy lime, gas bearing.
3535	3575	40	Grey lime.
3575	3585	10	Green shale.
3585	3647	62	Grey lime, oil showing.
3647	3721	74	Lime, oil showing.
3721	3760	39	Lime, oil saturated.
3760	Total Depth.		