


DUPLICATE

OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

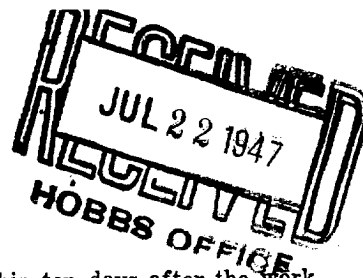

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL			

July 20, 1947

Monument, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO.
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the _____
Amerada Petroleum Corporation J. G. Hare Well No. 6 in the _____
Company or Operator Lease

NW 1/4, SW 1/4 of Sec. 33, T. 21S, R. 37E, N. M. P. M.,
Brunson Field, Lea County.

The dates of this work were as follows: July 19, 20, 1947

Notice of intention to do the work was ~~was not~~ submitted on Form C-102 on July 17 19 47
and approval of the proposed plan was ~~was not~~ obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

8165' Total Depth Line. Ran temperature survey and found top of cement at 4350', 71% of calculated fill. Nipped up, went in hole with tubing, found top of cement at 8080' and tested casing with 1000# for 30 minutes and was OK. Drilled out cement to 8160', tested with 1000# for 30 minutes and was OK. Gun perforated with Lane Wells 8110'-8160', 200 holes. Ran 68 jts. 2" EUE, 4.7#, H-40, R-2 SS Tubing Second Hand and 195 jts. 2" EUE, 4.7#, J-55, R-2 SS Tubing New with Lane Wells Hook Wall Packer. 3' perforated nipple on bottom bull plugged and 4-4' sub on packer and 2-6' and 1-4' sub on top of tubing. Tubing set at 8155' and packer set at 8055. Displaced mud with 20 barrels water and 175 barrels oil

Witnessed by K. V. Stephenson Amerada Petroleum Corp. Foreman
Name Company Title

Subscribed and sworn before me this _____

I hereby swear or affirm that the information given above is true and correct.

20th. day of July, 19 47

Name Roy Yankovich

Position Asst. Dist. Supt.

Representing Amerada Petroleum Corp.
Company or Operator

My commission expires My Commission Expires May 5, 1948

Address Drawer D, Monument, New Mexico

Remarks:

APPROVED

Date JUL 22 1947

Roy Yankovich
Name
Oil & Gas Inspector