


OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

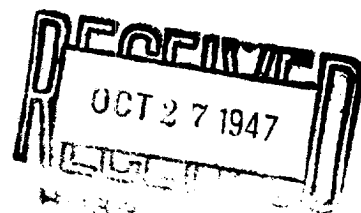

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS	REPORT ON REPAIRING WELL
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL	REPORT ON PULLING OR OTHERWISE ALTERING CASING
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	REPORT ON DEEPENING WELL
REPORT ON RESULT OF PLUGGING OF WELL	REPORT ON RUNNING FLOW VALVES X

October 20, 1947 Date

Monument, New Mexico. Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the _____

Amerada Petroleum Corporation Company or Operator J. G. Hare Lease Well No. 7 in the _____

SW_{1/4} SW_{1/4} of Sec. 33, T. 21S, R. 37E, N. M. P. M.,
Hare Field, Lea County.

The dates of this work were as follows: October 18, 1947

Notice of intention to do the work ~~was~~ (was not) submitted on Form C-102 on _____ 19____

and approval of the proposed plan ~~was~~ (was not) obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

7920' Drilled out depth, swabbed 250.37 bbls fluid in 63 hours and would not flow, pulled tubing out of hole, and ran 253 jts of 2" EUE 4.7#, J-55, 8 RT, R-2, SS tubing and set at 7859' with American Type G Packer set at 7726', with 1-3' Perforated Nipple on bottom, 3-6 Port Nixon flow valves set at 7465-7485 - 6812 and 2- 3 Port Nixon flow valves set at 6408 - 5942, and 3-1 Port Nixon flow valves set at 4979 - 4482 - 3985, and standing valve at 7854', weight bar stop at 7722', and put on Xmas tree and released rig at 10PM October 18, 1947 and will test well later with gas lift.

Witnessed by K. V. Stephenson Name Amerada Pet. Corp., Company Foreman Title

Subscribed and sworn before me this _____

I hereby swear or affirm that the information given above is true and correct.

20 day of October, 1947

Name W. H. Taylor

Position Asst. Dist. Supt.

Representing Amerada Pet. Corp., Company or Operator

My commission expires _____

Address Drawer D, Monument, New Mexico.

Remarks:

APPROVED

Date OCT-27-1947

W. H. Taylor Name
OIL & GAS INSPECTOR
Title